

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P950993

Luminaire Tested: **GLAN-SB5B-740-U-SLL**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P950993
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: GLAN-SB5B-740-U-SLL
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(5) 70 CRI, 4000K, 450mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT
ELIMINATOR LEFT OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 29986 lumens
Efficiency: N/A
Efficacy: 164.1 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B3 - U0 - G5


Input Watts (W): 182.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

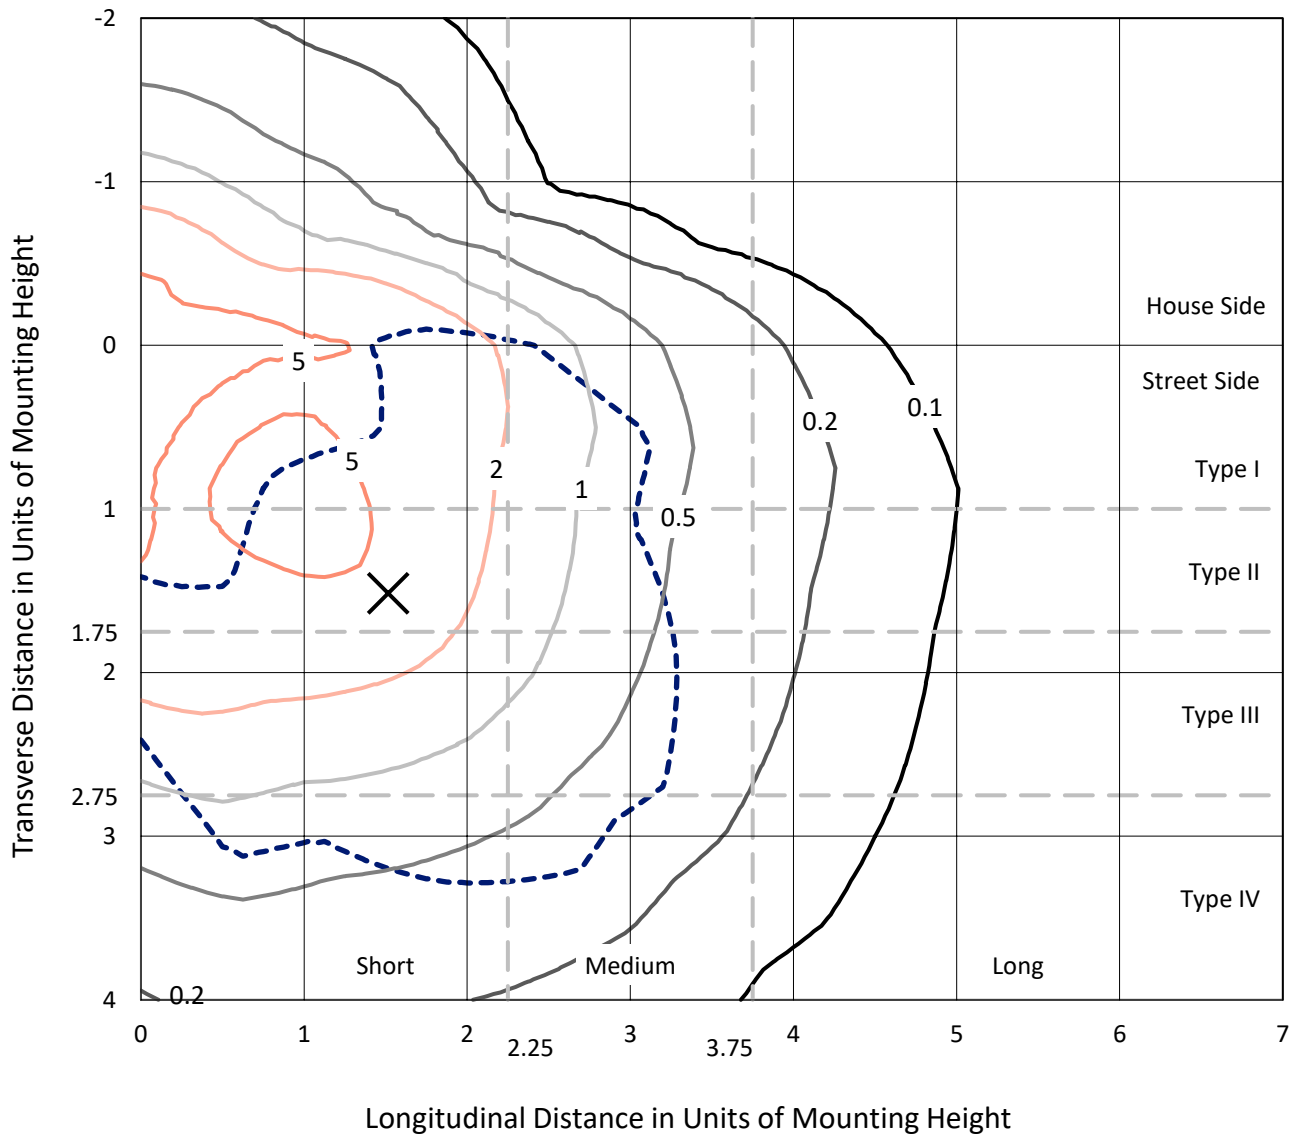

Based on 25 foot mounting height. Maximum calculated value = 9.1 fc
 Type IV - Short - N/A

REPORT NUMBER: P950993
CATALOG NUMBER: GLAN-SB5B-740-U-SLL

Luminous Intensity Polar Plot

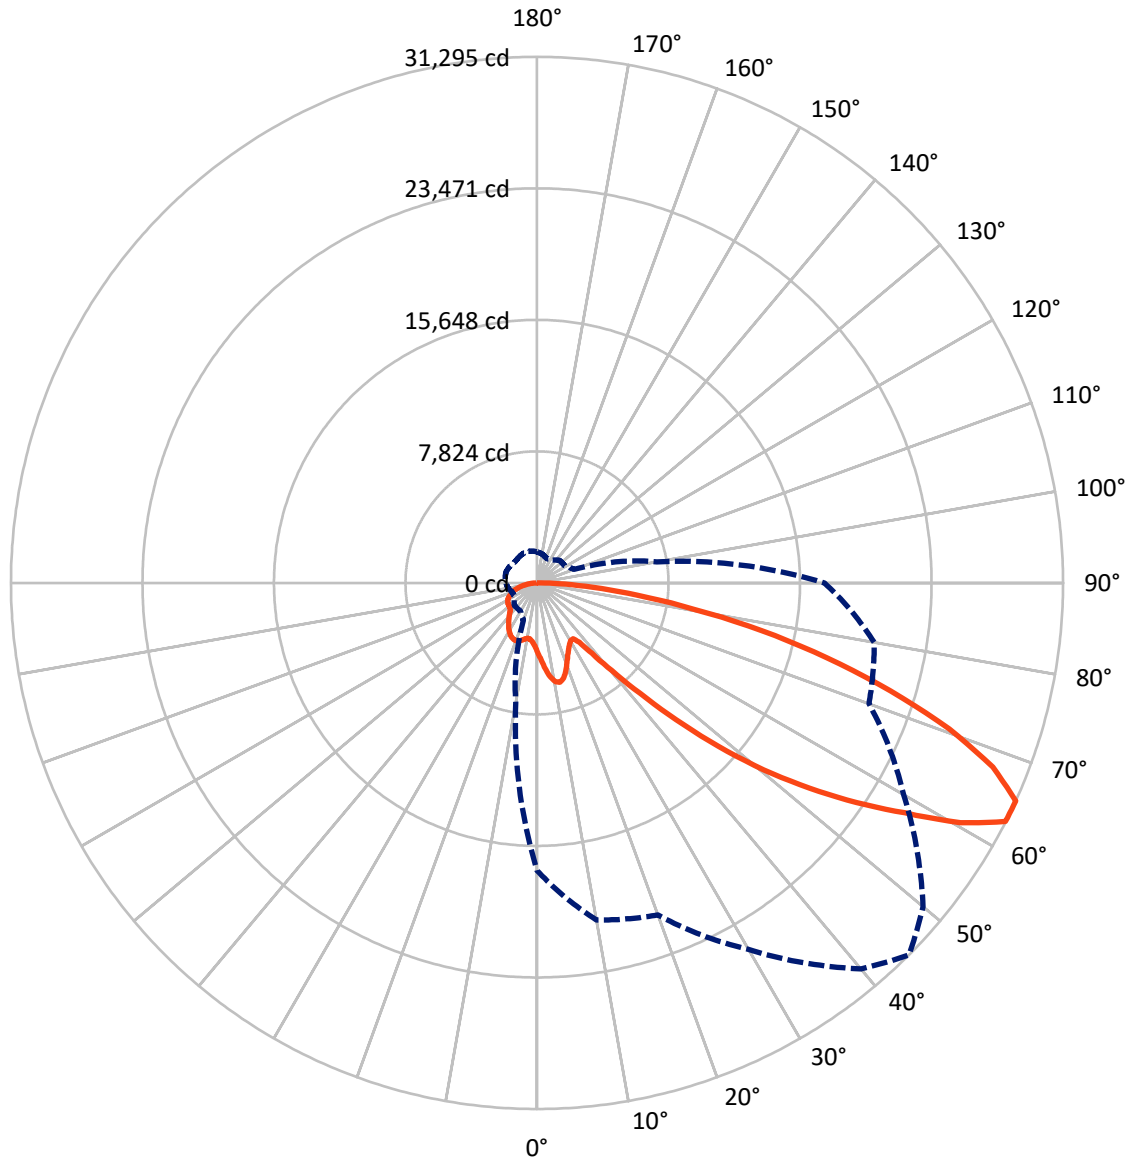

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	7620.9	0.0	7620.9
	% Fixture	25.4	0.0	25.4
Street Side	Lumens	22365.1	0.0	22365.1
	% Fixture	74.6	0.0	74.6
Total	Lumens	29986.0	0.0	29986.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	409.0	1.4
10°-20°	1284.0	4.3
20°-30°	1983.4	6.6
30°-40°	2513.4	8.4
40°-50°	3790.9	12.6
50°-60°	6124.8	20.4
60°-70°	7635.5	25.5
70°-80°	5007.0	16.7
80°-90°	1237.9	4.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	29986.0	100.0
0°-180°	29986.0	100.0

Coefficient of Utilization




REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	2016.9	6.7			
FM (30°-60°)	8746.3	29.2			
FH (60°-80°)	10582.2	35.3			G4/12000
FVH (80°-90°)	1019.7	3.4			G5
BL (0°-30°)	1659.6	5.5	B3/2500		
BM (30°-60°)	3682.9	12.3	B3/5000		
BH (60°-80°)	2060.3	6.9	B3/2500		G3/2500
BVH (80°-90°)	218.1	0.7			G2/225
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G5
 Type IV Short

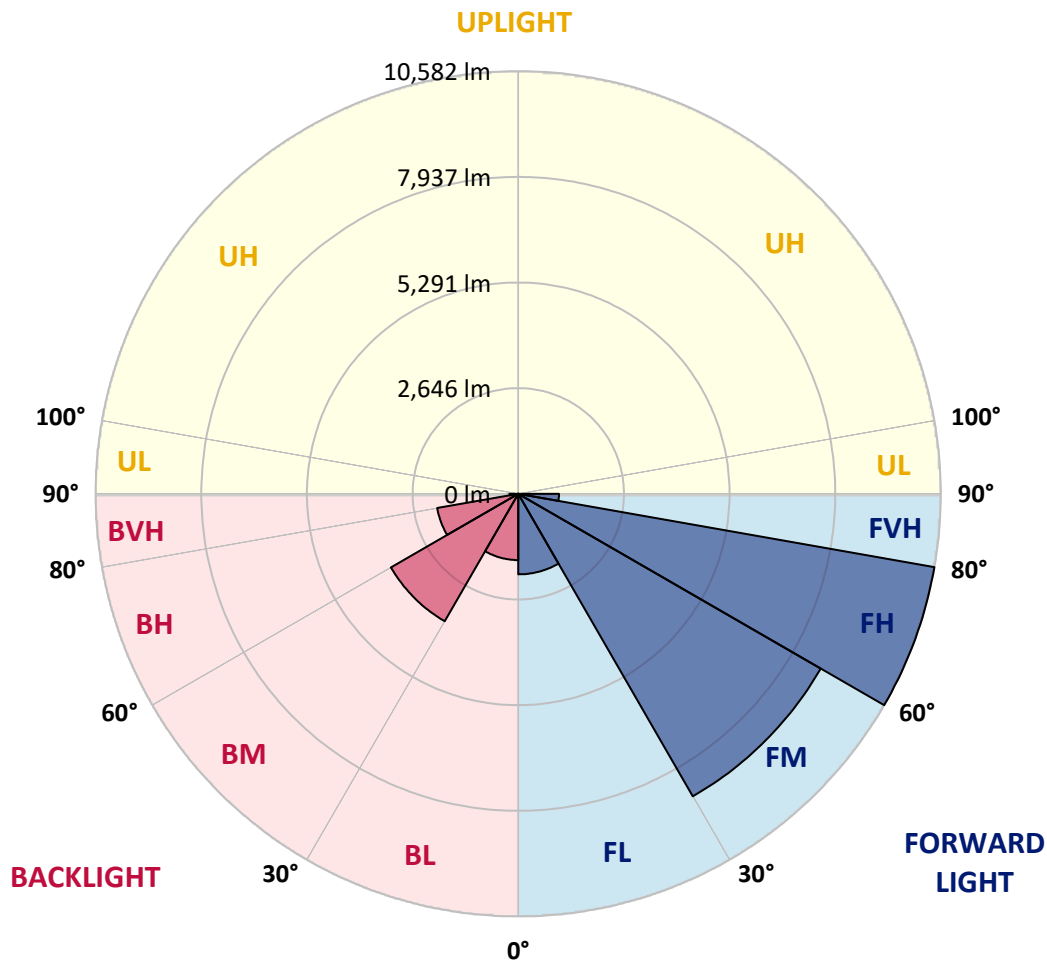

REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°
0°	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3
2.5°	4434.2	4451.0	4467.9	4491.8	4515.7	4530.0	4544.2	4551.3	4558.5	4555.3
5°	4768.1	4826.8	4885.7	4943.9	5002.3	5033.9	5065.6	5084.7	5104.0	5118.6
7.5°	5103.5	5199.1	5294.5	5380.4	5466.3	5518.1	5569.8	5597.8	5625.7	5639.1
10°	5360.6	5473.6	5586.6	5687.4	5788.2	5849.2	5910.0	5937.2	5964.3	5974.6
12.5°	5518.1	5640.5	5762.9	5854.0	5944.8	5989.1	6033.4	6048.3	6063.2	6064.7
15°	5613.8	5719.5	5825.0	5882.2	5939.4	5941.0	5942.6	5926.8	5911.0	5892.3
17.5°	5667.6	5739.0	5810.3	5811.4	5812.4	5748.3	5684.2	5625.5	5566.7	5525.2
20°	5726.9	5751.8	5776.8	5701.6	5626.5	5485.0	5343.6	5240.6	5137.6	5074.3
22.5°	5795.8	5763.2	5730.6	5574.9	5419.2	5211.1	5003.1	4874.3	4745.5	4675.5
25°	5884.4	5781.5	5678.7	5442.3	5205.9	4953.2	4700.5	4565.1	4430.0	4363.8
27.5°	6004.6	5820.8	5636.8	5323.6	5010.7	4730.6	4450.5	4317.3	4184.2	4121.8
30°	6166.8	5892.6	5618.6	5233.1	4847.7	4555.9	4264.2	4140.6	4017.0	3958.8
32.5°	6358.3	5982.8	5607.5	5171.4	4735.3	4461.1	4186.9	4089.9	3992.8	3950.9
35°	6590.8	6131.4	5672.0	5217.6	4763.4	4572.8	4382.5	4359.9	4337.3	4333.8
37.5°	6982.5	6442.0	5901.5	5488.5	5075.5	5063.2	5050.8	5154.3	5257.8	5311.6
40°	7574.2	6986.4	6398.6	6091.5	5784.4	6001.1	6217.9	6469.5	6721.1	6846.4
42.5°	8359.0	7775.8	7192.6	7015.7	6838.8	7311.6	7784.3	8241.9	8699.5	8968.2
45°	9328.1	8804.3	8280.2	8202.2	8124.0	8881.5	9639.0	10390.9	11143.0	11599.4
47.5°	10540.1	10030.5	9520.7	9504.9	9489.0	10581.7	11674.1	12774.9	13875.5	14521.9
50°	12128.7	11499.1	10869.7	10872.4	10875.1	12283.3	13691.5	15144.5	16597.4	17475.9
52.5°	13952.2	13189.9	12427.8	12350.7	12273.5	13955.6	15637.7	17435.4	19233.0	20286.0
55°	15893.7	15140.5	14387.4	14086.9	13786.4	15658.5	17530.5	19673.6	21816.8	23069.1
57.5°	17659.4	17249.3	16839.1	16236.4	15633.9	17524.2	19414.5	21842.0	24269.3	25822.3
60°	18726.7	19363.7	20000.9	19252.5	18504.1	20292.9	22081.8	24680.8	27279.8	28958.3
62.5°	18184.8	19925.4	21666.0	21581.7	21497.2	23135.9	24774.8	27247.5	29720.1	31271.5
65°	17100.1	18733.8	20367.5	20690.7	21013.8	23096.4	25179.1	27576.8	29974.4	31295.2
67.5°	15646.8	17200.6	18754.4	18905.9	19057.4	21227.3	23397.0	25805.0	28213.0	29247.8
70°	13900.8	15590.8	17281.0	17348.7	17416.6	19357.0	21297.3	23369.6	25441.7	26016.9
72.5°	11820.2	13759.5	15699.0	15747.8	15796.4	17314.5	18832.7	20384.7	21936.6	21994.8
75°	9188.1	11195.3	13202.6	13382.8	13563.0	14744.2	15925.3	17017.8	18110.4	17817.7
77.5°	6564.7	8438.4	10312.3	10570.2	10828.1	11726.0	12624.0	13398.8	14173.8	13670.6
80°	4296.6	5873.0	7449.2	7769.8	8090.3	8768.5	9446.3	9853.3	10260.1	9450.8
82.5°	2497.6	3575.2	4653.1	5011.1	5369.4	5836.1	6302.9	6472.7	6642.3	6006.2
85°	1098.9	1670.9	2242.8	2547.4	2852.0	3235.5	3618.9	3715.3	3811.6	3302.1
87.5°	340.2	532.4	724.7	894.6	1064.5	1256.3	1448.1	1456.3	1464.4	1229.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

CANDELA DISTRIBUTION (continued):

50°		55°	60°	65°	70°	75°	80°	85°	90°	95°	100°
4123.3	0°	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3
4558.5	2.5°	4551.3	4544.2	4530.0	4515.7	4491.8	4467.9	4451.0	4434.2	4400.2	4366.2
5104.0	5°	5084.7	5065.6	5033.9	5002.3	4943.9	4885.7	4826.8	4768.1	4692.9	4617.8
5625.7	7.5°	5597.8	5569.8	5518.1	5466.3	5380.4	5294.5	5199.1	5103.5	4979.5	4855.6
5964.3	10°	5937.2	5910.0	5849.2	5788.2	5687.4	5586.6	5473.6	5360.6	5203.8	5047.0
6063.2	12.5°	6048.3	6033.4	5989.1	5944.8	5854.0	5762.9	5640.5	5518.1	5345.8	5173.6
5911.0	15°	5926.8	5942.6	5941.0	5939.4	5882.2	5825.0	5719.5	5613.8	5434.2	5254.6
5566.7	17.5°	5625.5	5684.2	5748.3	5812.4	5811.4	5810.3	5739.0	5667.6	5485.5	5303.4
5137.6	20°	5240.6	5343.6	5485.0	5626.5	5701.6	5776.8	5751.8	5726.9	5537.7	5348.3
4745.5	22.5°	4874.3	5003.1	5211.1	5419.2	5574.9	5730.6	5763.2	5795.8	5602.4	5408.9
4430.0	25°	4565.1	4700.5	4953.2	5205.9	5442.3	5678.7	5781.5	5884.4	5694.8	5505.4
4184.2	27.5°	4317.3	4450.5	4730.6	5010.7	5323.6	5636.8	5820.8	6004.6	5823.9	5643.1
4017.0	30°	4140.6	4264.2	4555.9	4847.7	5233.1	5618.6	5892.6	6166.8	5992.1	5817.6
3992.8	32.5°	4089.9	4186.9	4461.1	4735.3	5171.4	5607.5	5982.8	6358.3	6185.3	6012.5
4337.3	35°	4359.9	4382.5	4572.8	4763.4	5217.6	5672.0	6131.4	6590.8	6425.3	6259.7
5257.8	37.5°	5154.3	5050.8	5063.2	5075.5	5488.5	5901.5	6442.0	6982.5	6771.4	6560.3
6721.1	40°	6469.5	6217.9	6001.1	5784.4	6091.5	6398.6	6986.4	7574.2	7266.6	6959.0
8699.5	42.5°	8241.9	7784.3	7311.6	6838.8	7015.7	7192.6	7775.8	8359.0	7915.0	7471.0
11143.0	45°	10390.9	9639.0	8881.5	8124.0	8202.2	8280.2	8804.3	9328.1	8729.3	8130.4
13875.5	47.5°	12774.9	11674.1	10581.7	9489.0	9504.9	9520.7	10030.5	10540.1	9697.3	8854.2
16597.4	50°	15144.5	13691.5	12283.3	10875.1	10872.4	10869.7	11499.1	12128.7	10858.0	9587.1
19233.0	52.5°	17435.4	15637.7	13955.6	12273.5	12350.7	12427.8	13189.9	13952.2	12077.3	10202.3
21816.8	55°	19673.6	17530.5	15658.5	13786.4	14086.9	14387.4	15140.5	15893.7	13158.3	10423.0
24269.3	57.5°	21842.0	19414.5	17524.2	15633.9	16236.4	16839.1	17249.3	17659.4	13924.4	10189.3
27279.8	60°	24680.8	22081.8	20292.9	18504.1	19252.5	20000.9	19363.7	18726.7	14115.9	9504.9
29720.1	62.5°	27247.5	24774.8	23135.9	21497.2	21581.7	21666.0	19925.4	18184.8	13309.7	8434.6
29974.4	65°	27576.8	25179.1	23096.4	21013.8	20690.7	20367.5	18733.8	17100.1	12169.1	7238.0
28213.0	67.5°	25805.0	23397.0	21227.3	19057.4	18905.9	18754.4	17200.6	15646.8	10811.6	5976.5
25441.7	70°	23369.6	21297.3	19357.0	17416.6	17348.7	17281.0	15590.8	13900.8	9330.5	4760.2
21936.6	72.5°	20384.7	18832.7	17314.5	15796.4	15747.8	15699.0	13759.5	11820.2	7724.8	3629.7
18110.4	75°	17017.8	15925.3	14744.2	13563.0	13382.8	13202.6	11195.3	9188.1	5884.2	2580.3
14173.8	77.5°	13398.8	12624.0	11726.0	10828.1	10570.2	10312.3	8438.4	6564.7	4118.4	1672.1
10260.1	80°	9853.3	9446.3	8768.5	8090.3	7769.8	7449.2	5873.0	4296.6	2653.4	1010.3
6642.3	82.5°	6472.7	6302.9	5836.1	5369.4	5011.1	4653.1	3575.2	2497.6	1535.7	574.0
3811.6	85°	3715.3	3618.9	3235.5	2852.0	2547.4	2242.8	1670.9	1098.9	690.8	282.9
1464.4	87.5°	1456.3	1448.1	1256.3	1064.5	894.6	724.7	532.4	340.2	226.3	112.3
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

CANDELA DISTRIBUTION (continued):

105°		110°	115°	120°	125°	130°	135°	140°	145°	150°	155°
4123.3	0°	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3
4330.0	2.5°	4293.9	4257.5	4221.1	4186.3	4151.5	4117.8	4080.3	4049.9	4019.7	3992.3
4542.8	5°	4467.9	4392.5	4317.2	4246.7	4176.3	4109.9	4044.2	3986.9	3929.5	3881.4
4741.0	7.5°	4626.5	4514.9	4403.4	4305.1	4206.9	4116.2	4031.2	3955.0	3878.9	3815.6
4895.6	10°	4744.4	4608.9	4473.3	4357.2	4240.7	4128.9	4037.6	3957.2	3876.8	3813.5
5002.1	12.5°	4830.6	4670.8	4511.0	4379.5	4248.0	4130.5	4045.5	3979.7	3914.2	3872.1
5068.6	15°	4882.5	4698.5	4514.5	4362.3	4210.0	4079.8	4011.8	3980.3	3949.0	3954.7
5100.4	17.5°	4897.4	4683.8	4470.2	4287.1	4104.0	3950.9	3908.9	3920.5	3931.9	4000.9
5125.2	20°	4902.1	4643.3	4384.4	4157.5	3930.6	3752.3	3741.2	3795.0	3848.8	3968.6
5158.8	22.5°	4908.4	4593.6	4278.7	4005.5	3732.2	3529.2	3550.9	3630.5	3710.1	3846.8
5219.5	25°	4933.4	4544.5	4155.8	3835.7	3515.8	3307.7	3366.2	3458.0	3549.8	3672.7
5314.4	27.5°	4985.7	4511.8	4037.9	3680.5	3323.0	3133.6	3204.8	3293.4	3382.1	3483.2
5437.4	30°	5057.2	4496.4	3935.4	3550.7	3166.1	3007.1	3062.9	3133.2	3203.7	3287.6
5565.7	32.5°	5118.9	4477.4	3835.7	3438.9	3041.9	2913.7	2938.5	2980.2	3021.8	3088.7
5711.9	35°	5164.1	4441.7	3719.5	3328.9	2938.2	2831.4	2821.1	2832.5	2844.1	2895.2
5875.7	37.5°	5191.0	4380.4	3569.9	3199.5	2829.1	2735.7	2698.0	2685.4	2672.7	2709.4
6083.6	40°	5208.0	4296.1	3384.4	3045.0	2705.6	2621.0	2563.2	2534.6	2506.0	2532.4
6355.6	42.5°	5240.1	4209.1	3178.4	2874.6	2570.8	2492.8	2420.0	2382.1	2344.1	2365.6
6713.5	45°	5296.6	4128.2	2960.1	2693.6	2427.2	2348.1	2277.6	2240.6	2203.8	2221.8
7094.8	47.5°	5335.3	4061.5	2787.6	2550.4	2313.2	2211.2	2150.6	2119.6	2088.6	2105.7
7448.6	50°	5310.0	3988.7	2667.4	2455.3	2243.3	2109.1	2038.7	2011.2	1983.8	2010.4
7678.3	52.5°	5154.2	3865.7	2577.5	2392.7	2208.0	2053.8	1955.3	1928.1	1901.1	1941.1
7627.7	55°	4832.2	3662.0	2491.7	2347.3	2202.8	2059.3	1911.0	1868.0	1825.1	1881.9
7271.4	57.5°	4353.6	3374.6	2395.5	2293.5	2191.4	2064.8	1884.5	1821.8	1759.1	1820.2
6608.3	60°	3711.6	3001.5	2291.4	2211.2	2131.0	2047.4	1859.5	1778.3	1697.0	1750.6
5711.6	62.5°	2988.5	2555.0	2121.5	2068.2	2015.0	2004.7	1830.3	1728.8	1627.3	1661.4
4796.7	65°	2355.6	2153.3	1950.9	1925.8	1900.6	1901.9	1769.0	1661.0	1553.0	1566.1
3900.6	67.5°	1824.6	1767.2	1709.6	1723.7	1737.6	1734.1	1659.5	1569.6	1479.7	1475.6
3071.1	70°	1382.1	1398.5	1414.8	1480.0	1545.1	1545.1	1520.5	1456.6	1392.7	1378.5
2347.9	72.5°	1066.1	1115.6	1165.3	1257.7	1350.0	1365.5	1365.8	1322.0	1278.1	1257.3
1704.1	75°	827.8	872.8	917.7	1021.2	1124.7	1196.2	1190.2	1156.5	1122.6	1102.7
1154.7	77.5°	637.3	667.9	698.6	799.0	899.5	1017.4	1014.2	987.2	960.1	939.9
744.0	80°	477.8	490.5	503.2	588.3	673.2	814.1	813.6	791.0	768.2	751.3
457.6	82.5°	341.4	343.7	346.2	408.9	471.5	591.8	598.4	587.3	576.3	564.2
244.6	85°	206.5	205.4	204.1	250.0	295.9	385.3	394.0	382.1	370.2	356.8
101.4	87.5°	90.5	89.4	88.3	107.0	125.8	163.0	174.0	169.3	164.6	162.0
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

CANDELA DISTRIBUTION (continued):

160°		165°	170°	175°	180°	185°	190°	195°	200°	205°	210°
4123.3	0°	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3
3965.1	2.5°	3941.2	3917.3	3893.3	3869.4	3850.9	3832.2	3817.2	3802.1	3790.4	3778.7
3833.5	5°	3791.1	3748.7	3710.2	3671.6	3642.0	3612.3	3591.5	3570.8	3556.1	3541.4
3752.3	7.5°	3699.0	3645.5	3598.3	3551.4	3516.1	3480.9	3456.3	3431.6	3414.6	3397.9
3750.2	10°	3692.8	3635.2	3582.2	3529.2	3487.1	3444.9	3417.3	3389.5	3373.5	3357.5
3830.3	12.5°	3785.0	3740.1	3685.2	3630.5	3576.7	3522.9	3487.3	3451.7	3433.8	3416.1
3960.4	15°	3948.7	3936.9	3889.3	3841.7	3765.1	3688.5	3634.4	3580.3	3555.5	3530.8
4069.9	17.5°	4106.6	4143.1	4104.7	4066.4	3965.0	3863.5	3783.8	3704.0	3667.3	3630.5
4088.5	20°	4165.3	4242.0	4224.3	4206.4	4090.4	3974.6	3876.8	3779.2	3732.2	3685.1
3983.8	22.5°	4083.6	4183.5	4194.2	4204.8	4094.1	3983.3	3882.7	3781.9	3732.4	3682.7
3795.8	25°	3894.1	3992.3	4029.0	4065.6	3974.8	3884.1	3794.5	3705.3	3662.3	3619.4
3584.1	27.5°	3662.9	3741.7	3782.5	3823.5	3758.8	3694.2	3624.8	3555.3	3526.5	3497.6
3371.4	30°	3436.8	3502.3	3535.5	3568.8	3519.5	3470.2	3420.5	3370.5	3355.8	3340.9
3155.8	32.5°	3218.4	3281.3	3318.1	3355.2	3309.9	3264.5	3224.8	3185.1	3175.4	3165.8
2946.1	35°	3008.2	3070.3	3114.7	3159.0	3126.7	3094.6	3057.8	3021.3	3006.6	2992.0
2746.0	37.5°	2807.9	2869.9	2924.6	2979.4	2964.5	2949.6	2915.9	2882.1	2855.3	2828.7
2558.8	40°	2618.6	2678.4	2741.4	2804.5	2808.2	2811.7	2783.0	2754.4	2715.5	2676.8
2387.3	42.5°	2443.9	2500.7	2568.8	2636.8	2655.0	2673.2	2649.0	2624.9	2576.7	2528.4
2240.1	45°	2293.9	2347.7	2418.3	2488.9	2515.0	2541.1	2519.3	2497.6	2442.4	2387.3
2122.6	47.5°	2175.3	2227.8	2297.4	2367.0	2397.1	2427.2	2412.0	2396.8	2347.7	2298.7
2037.1	50°	2086.8	2136.3	2198.7	2261.0	2299.6	2338.2	2337.3	2336.7	2297.4	2258.2
1981.0	52.5°	2026.5	2072.0	2130.0	2188.2	2234.0	2279.7	2287.9	2296.2	2264.2	2232.2
1938.6	55°	1987.6	2036.7	2087.6	2138.4	2186.8	2235.4	2246.8	2258.2	2230.3	2202.5
1881.3	57.5°	1938.9	1996.5	2046.8	2097.3	2146.2	2194.9	2206.4	2218.0	2189.8	2161.7
1804.1	60°	1870.2	1936.4	1987.5	2038.7	2087.8	2136.8	2149.5	2162.1	2134.6	2107.2
1695.4	62.5°	1772.4	1849.6	1904.2	1958.8	2003.8	2048.7	2060.9	2073.1	2048.2	2023.4
1579.1	65°	1661.7	1744.4	1796.6	1848.9	1888.4	1928.0	1940.5	1952.8	1928.9	1905.0
1471.5	67.5°	1547.8	1624.2	1673.7	1723.1	1757.2	1791.4	1803.6	1815.6	1793.6	1771.8
1364.2	70°	1431.3	1498.4	1541.1	1583.8	1614.7	1645.5	1657.2	1669.0	1651.1	1633.2
1236.5	72.5°	1289.4	1342.1	1380.7	1419.3	1449.5	1479.7	1493.6	1507.6	1492.7	1477.8
1082.6	75°	1121.8	1161.1	1196.0	1231.0	1258.5	1286.0	1300.6	1315.2	1307.9	1300.6
919.6	77.5°	951.6	983.4	1013.4	1043.5	1072.4	1101.2	1114.9	1128.5	1118.3	1107.9
734.2	80°	760.7	787.2	812.5	837.8	859.8	881.6	899.7	917.7	913.3	909.0
552.2	82.5°	550.0	547.8	538.9	530.1	576.9	623.7	654.4	685.1	683.2	681.2
343.3	85°	332.0	320.4	295.9	271.4	315.2	359.2	397.1	435.1	432.0	428.8
159.5	87.5°	159.0	158.5	139.9	121.0	139.4	157.9	173.3	188.6	184.8	180.7
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

CANDELA DISTRIBUTION (continued):

215°		220°	225°	230°	235°	240°	245°	250°	255°	260°	265°
4123.3	0°	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3
3768.0	2.5°	3757.0	3743.6	3757.0	3768.0	3778.7	3790.4	3802.1	3817.2	3832.2	3850.9
3530.1	5°	3518.9	3507.8	3518.9	3530.1	3541.4	3556.1	3570.8	3591.5	3612.3	3642.0
3387.7	7.5°	3377.8	3370.2	3377.8	3387.7	3397.9	3414.6	3431.6	3456.3	3480.9	3516.1
3349.0	10°	3340.4	3337.0	3340.4	3349.0	3357.5	3373.5	3389.5	3417.3	3444.9	3487.1
3408.8	12.5°	3401.5	3400.2	3401.5	3408.8	3416.1	3433.8	3451.7	3487.3	3522.9	3576.7
3521.3	15°	3511.8	3511.0	3511.8	3521.3	3530.8	3555.5	3580.3	3634.4	3688.5	3765.1
3618.4	17.5°	3606.3	3604.4	3606.3	3618.4	3630.5	3667.3	3704.0	3783.8	3863.5	3965.0
3670.0	20°	3655.0	3650.2	3655.0	3670.0	3685.1	3732.2	3779.2	3876.8	3974.6	4090.4
3666.1	22.5°	3649.5	3642.3	3649.5	3666.1	3682.7	3732.4	3781.9	3882.7	3983.3	4094.1
3603.7	25°	3588.2	3579.0	3588.2	3603.7	3619.4	3662.3	3705.3	3794.5	3884.1	3974.8
3490.4	27.5°	3483.3	3480.9	3483.3	3490.4	3497.6	3526.5	3555.3	3624.8	3694.2	3758.8
3340.9	30°	3340.9	3343.3	3340.9	3340.9	3340.9	3355.8	3370.5	3420.5	3470.2	3519.5
3167.0	32.5°	3168.4	3170.8	3168.4	3167.0	3165.8	3175.4	3185.1	3224.8	3264.5	3309.9
2988.9	35°	2985.7	2984.1	2985.7	2988.9	2992.0	3006.6	3021.3	3057.8	3094.6	3126.7
2814.7	37.5°	2800.6	2792.7	2800.6	2814.7	2828.7	2855.3	2882.1	2915.9	2949.6	2964.5
2650.6	40°	2624.6	2609.1	2624.6	2650.6	2676.8	2715.5	2754.4	2783.0	2811.7	2808.2
2490.3	42.5°	2452.2	2427.2	2452.2	2490.3	2528.4	2576.7	2624.9	2649.0	2673.2	2655.0
2342.5	45°	2297.7	2268.9	2297.7	2342.5	2387.3	2442.4	2497.6	2519.3	2541.1	2515.0
2257.2	47.5°	2215.9	2188.2	2215.9	2257.2	2298.7	2347.7	2396.8	2412.0	2427.2	2397.1
2219.9	50°	2181.6	2155.0	2181.6	2219.9	2258.2	2297.4	2336.7	2337.3	2338.2	2299.6
2197.9	52.5°	2163.7	2139.2	2163.7	2197.9	2232.2	2264.2	2296.2	2287.9	2279.7	2234.0
2172.4	55°	2142.4	2120.2	2142.4	2172.4	2202.5	2230.3	2258.2	2246.8	2235.4	2186.8
2131.9	57.5°	2102.0	2079.1	2102.0	2131.9	2161.7	2189.8	2218.0	2206.4	2194.9	2146.2
2076.5	60°	2045.8	2022.1	2045.8	2076.5	2107.2	2134.6	2162.1	2149.5	2136.8	2087.8
1991.1	62.5°	1958.8	1930.3	1958.8	1991.1	2023.4	2048.2	2073.1	2060.9	2048.7	2003.8
1873.7	65°	1842.5	1818.0	1842.5	1873.7	1905.0	1928.9	1952.8	1940.5	1928.0	1888.4
1742.7	67.5°	1713.6	1691.4	1713.6	1742.7	1771.8	1793.6	1815.6	1803.6	1791.4	1757.2
1605.3	70°	1577.5	1552.2	1577.5	1605.3	1633.2	1651.1	1669.0	1657.2	1645.5	1614.7
1451.2	72.5°	1424.8	1400.3	1424.8	1451.2	1477.8	1492.7	1507.6	1493.6	1479.7	1449.5
1278.3	75°	1256.0	1232.6	1256.0	1278.3	1300.6	1307.9	1315.2	1300.6	1286.0	1258.5
1085.4	77.5°	1063.0	1044.3	1063.0	1085.4	1107.9	1118.3	1128.5	1114.9	1101.2	1072.4
878.8	80°	848.4	813.3	848.4	878.8	909.0	913.3	917.7	899.7	881.6	859.8
655.7	82.5°	630.1	607.6	630.1	655.7	681.2	683.2	685.1	654.4	623.7	576.9
408.9	85°	388.9	368.7	388.9	408.9	428.8	432.0	435.1	397.1	359.2	315.2
170.6	87.5°	160.1	150.3	160.1	170.6	180.7	184.8	188.6	173.3	157.9	139.4
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

CANDELA DISTRIBUTION (continued):

270°		275°	280°	285°	290°	295°	300°	305°	310°	315°	320°
4123.3	0°	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3
3869.4	2.5°	3893.3	3917.3	3941.2	3965.1	3992.3	4019.7	4049.9	4080.3	4117.8	4151.5
3671.6	5°	3710.2	3748.7	3791.1	3833.5	3881.4	3929.5	3986.9	4044.2	4109.9	4176.3
3551.4	7.5°	3598.3	3645.5	3699.0	3752.3	3815.6	3878.9	3955.0	4031.2	4116.2	4206.9
3529.2	10°	3582.2	3635.2	3692.8	3750.2	3813.5	3876.8	3957.2	4037.6	4128.9	4240.7
3630.5	12.5°	3685.2	3740.1	3785.0	3830.3	3872.1	3914.2	3979.7	4045.5	4130.5	4248.0
3841.7	15°	3889.3	3936.9	3948.7	3960.4	3954.7	3949.0	3980.3	4011.8	4079.8	4210.0
4066.4	17.5°	4104.7	4143.1	4106.6	4069.9	4000.9	3931.9	3920.5	3908.9	3950.9	4104.0
4206.4	20°	4224.3	4242.0	4165.3	4088.5	3968.6	3848.8	3795.0	3741.2	3752.3	3930.6
4204.8	22.5°	4194.2	4183.5	4083.6	3983.8	3846.8	3710.1	3630.5	3550.9	3529.2	3732.2
4065.6	25°	4029.0	3992.3	3894.1	3795.8	3672.7	3549.8	3458.0	3366.2	3307.7	3515.8
3823.5	27.5°	3782.5	3741.7	3662.9	3584.1	3483.2	3382.1	3293.4	3204.8	3133.6	3323.0
3568.8	30°	3535.5	3502.3	3436.8	3371.4	3287.6	3203.7	3133.2	3062.9	3007.1	3166.1
3355.2	32.5°	3318.1	3281.3	3218.4	3155.8	3088.7	3021.8	2980.2	2938.5	2913.7	3041.9
3159.0	35°	3114.7	3070.3	3008.2	2946.1	2895.2	2844.1	2832.5	2821.1	2831.4	2938.2
2979.4	37.5°	2924.6	2869.9	2807.9	2746.0	2709.4	2672.7	2685.4	2698.0	2735.7	2829.1
2804.5	40°	2741.4	2678.4	2618.6	2558.8	2532.4	2506.0	2534.6	2563.2	2621.0	2705.6
2636.8	42.5°	2568.8	2500.7	2443.9	2387.3	2365.6	2344.1	2382.1	2420.0	2492.8	2570.8
2488.9	45°	2418.3	2347.7	2293.9	2240.1	2221.8	2203.8	2240.6	2277.6	2348.1	2427.2
2367.0	47.5°	2297.4	2227.8	2175.3	2122.6	2105.7	2088.6	2119.6	2150.6	2211.2	2313.2
2261.0	50°	2198.7	2136.3	2086.8	2037.1	2010.4	1983.8	2011.2	2038.7	2109.1	2243.3
2188.2	52.5°	2130.0	2072.0	2026.5	1981.0	1941.1	1901.1	1928.1	1955.3	2053.8	2208.0
2138.4	55°	2087.6	2036.7	1987.6	1938.6	1881.9	1825.1	1868.0	1911.0	2059.3	2202.8
2097.3	57.5°	2046.8	1996.5	1938.9	1881.3	1820.2	1759.1	1821.8	1884.5	2064.8	2191.4
2038.7	60°	1987.5	1936.4	1870.2	1804.1	1750.6	1697.0	1778.3	1859.5	2047.4	2131.0
1958.8	62.5°	1904.2	1849.6	1772.4	1695.4	1661.4	1627.3	1728.8	1830.3	2004.7	2015.0
1848.9	65°	1796.6	1744.4	1661.7	1579.1	1566.1	1553.0	1661.0	1769.0	1901.9	1900.6
1723.1	67.5°	1673.7	1624.2	1547.8	1471.5	1475.6	1479.7	1569.6	1659.5	1734.1	1737.6
1583.8	70°	1541.1	1498.4	1431.3	1364.2	1378.5	1392.7	1456.6	1520.5	1545.1	1545.1
1419.3	72.5°	1380.7	1342.1	1289.4	1236.5	1257.3	1278.1	1322.0	1365.8	1365.5	1350.0
1231.0	75°	1196.0	1161.1	1121.8	1082.6	1102.7	1122.6	1156.5	1190.2	1196.2	1124.7
1043.5	77.5°	1013.4	983.4	951.6	919.6	939.9	960.1	987.2	1014.2	1017.4	899.5
837.8	80°	812.5	787.2	760.7	734.2	751.3	768.2	791.0	813.6	814.1	673.2
530.1	82.5°	538.9	547.8	550.0	552.2	564.2	576.3	587.3	598.4	591.8	471.5
271.4	85°	295.9	320.4	332.0	343.3	356.8	370.2	382.1	394.0	385.3	295.9
121.0	87.5°	139.9	158.5	159.0	159.5	162.0	164.6	169.3	174.0	163.0	125.8
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P950993
 CATALOG NUMBER: GLAN-SB5B-740-U-SLL

CANDELA DISTRIBUTION (continued):

325°		330°	335°	340°	345°	350°	355°	360°
4123.3	0°	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3	4123.3
4186.3	2.5°	4221.1	4257.5	4293.9	4330.0	4366.2	4400.2	4434.2
4246.7	5°	4317.2	4392.5	4467.9	4542.8	4617.8	4692.9	4768.1
4305.1	7.5°	4403.4	4514.9	4626.5	4741.0	4855.6	4979.5	5103.5
4357.2	10°	4473.3	4608.9	4744.4	4895.6	5047.0	5203.8	5360.6
4379.5	12.5°	4511.0	4670.8	4830.6	5002.1	5173.6	5345.8	5518.1
4362.3	15°	4514.5	4698.5	4882.5	5068.6	5254.6	5434.2	5613.8
4287.1	17.5°	4470.2	4683.8	4897.4	5100.4	5303.4	5485.5	5667.6
4157.5	20°	4384.4	4643.3	4902.1	5125.2	5348.3	5537.7	5726.9
4005.5	22.5°	4278.7	4593.6	4908.4	5158.8	5408.9	5602.4	5795.8
3835.7	25°	4155.8	4544.5	4933.4	5219.5	5505.4	5694.8	5884.4
3680.5	27.5°	4037.9	4511.8	4985.7	5314.4	5643.1	5823.9	6004.6
3550.7	30°	3935.4	4496.4	5057.2	5437.4	5817.6	5992.1	6166.8
3438.9	32.5°	3835.7	4477.4	5118.9	5565.7	6012.5	6185.3	6358.3
3328.9	35°	3719.5	4441.7	5164.1	5711.9	6259.7	6425.3	6590.8
3199.5	37.5°	3569.9	4380.4	5191.0	5875.7	6560.3	6771.4	6982.5
3045.0	40°	3384.4	4296.1	5208.0	6083.6	6959.0	7266.6	7574.2
2874.6	42.5°	3178.4	4209.1	5240.1	6355.6	7471.0	7915.0	8359.0
2693.6	45°	2960.1	4128.2	5296.6	6713.5	8130.4	8729.3	9328.1
2550.4	47.5°	2787.6	4061.5	5335.3	7094.8	8854.2	9697.3	10540.1
2455.3	50°	2667.4	3988.7	5310.0	7448.6	9587.1	10858.0	12128.7
2392.7	52.5°	2577.5	3865.7	5154.2	7678.3	10202.3	12077.3	13952.2
2347.3	55°	2491.7	3662.0	4832.2	7627.7	10423.0	13158.3	15893.7
2293.5	57.5°	2395.5	3374.6	4353.6	7271.4	10189.3	13924.4	17659.4
2211.2	60°	2291.4	3001.5	3711.6	6608.3	9504.9	14115.9	18726.7
2068.2	62.5°	2121.5	2555.0	2988.5	5711.6	8434.6	13309.7	18184.8
1925.8	65°	1950.9	2153.3	2355.6	4796.7	7238.0	12169.1	17100.1
1723.7	67.5°	1709.6	1767.2	1824.6	3900.6	5976.5	10811.6	15646.8
1480.0	70°	1414.8	1398.5	1382.1	3071.1	4760.2	9330.5	13900.8
1257.7	72.5°	1165.3	1115.6	1066.1	2347.9	3629.7	7724.8	11820.2
1021.2	75°	917.7	872.8	827.8	1704.1	2580.3	5884.2	9188.1
799.0	77.5°	698.6	667.9	637.3	1154.7	1672.1	4118.4	6564.7
588.3	80°	503.2	490.5	477.8	744.0	1010.3	2653.4	4296.6
408.9	82.5°	346.2	343.7	341.4	457.6	574.0	1535.7	2497.6
250.0	85°	204.1	205.4	206.5	244.6	282.9	690.8	1098.9
107.0	87.5°	88.3	89.4	90.5	101.4	112.3	226.3	340.2
0.0	90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)