

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P148014

Luminaire Tested: **TMU-F06-LED-E-U-5WQ-7030**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P148014
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33675)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: TMU-F06-LED-E-U-5WQ-7030
Description: TALON MEDIUM LED AREA LUMINAIRE
(6) LIGHTBARS WITH AccuLED OPTICS - TYPE 5 SQUARE WIDE
Light Source: (42) 3000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14403.4 lumens
Efficiency: N/A
Efficacy: 92.0 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
IES Classification: Type V - Short - Semi-Cutoff
BUG Rating: B4 - U0 - G2


Input Watts (W): 156.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P148014
 CATALOG NUMBER: TMU-F06-LED-E-U-5WQ-7030

Iso-Footcandle Lines of Horizontal Illumination

✕ Max cd
 - - - 1/2 Max cd

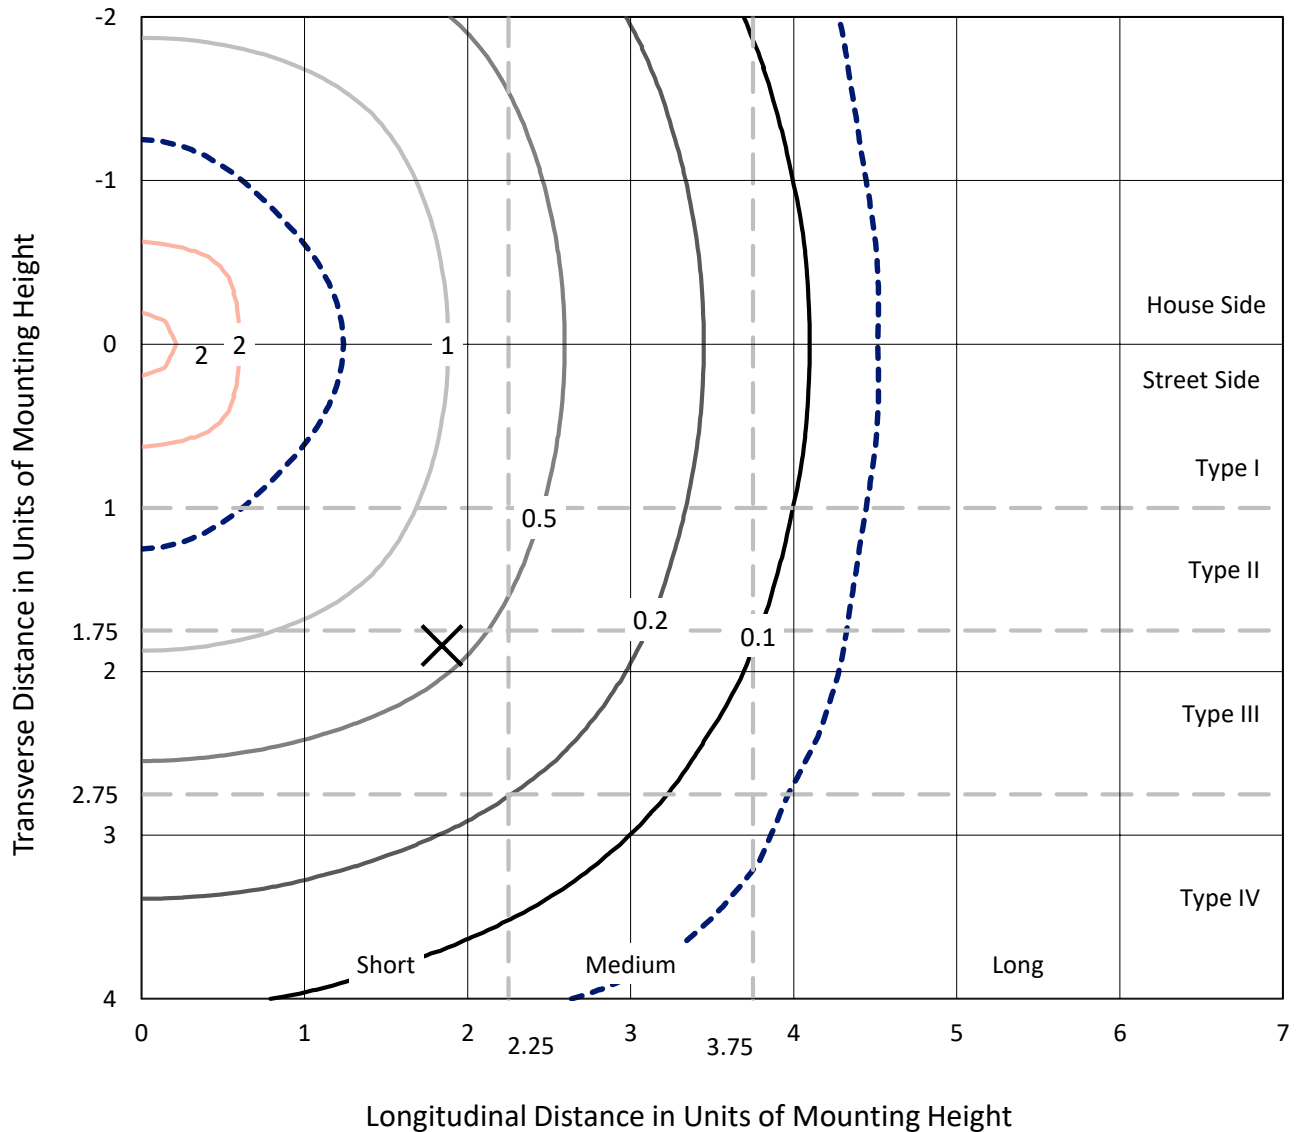


Based on 20 foot mounting height. Maximum calculated value = 2.2 fc
 Type V - Short - Semi-Cutoff

REPORT NUMBER: P148014

CATALOG NUMBER: TMU-F06-LED-E-U-5WQ-7030

Luminous Intensity Polar Plot

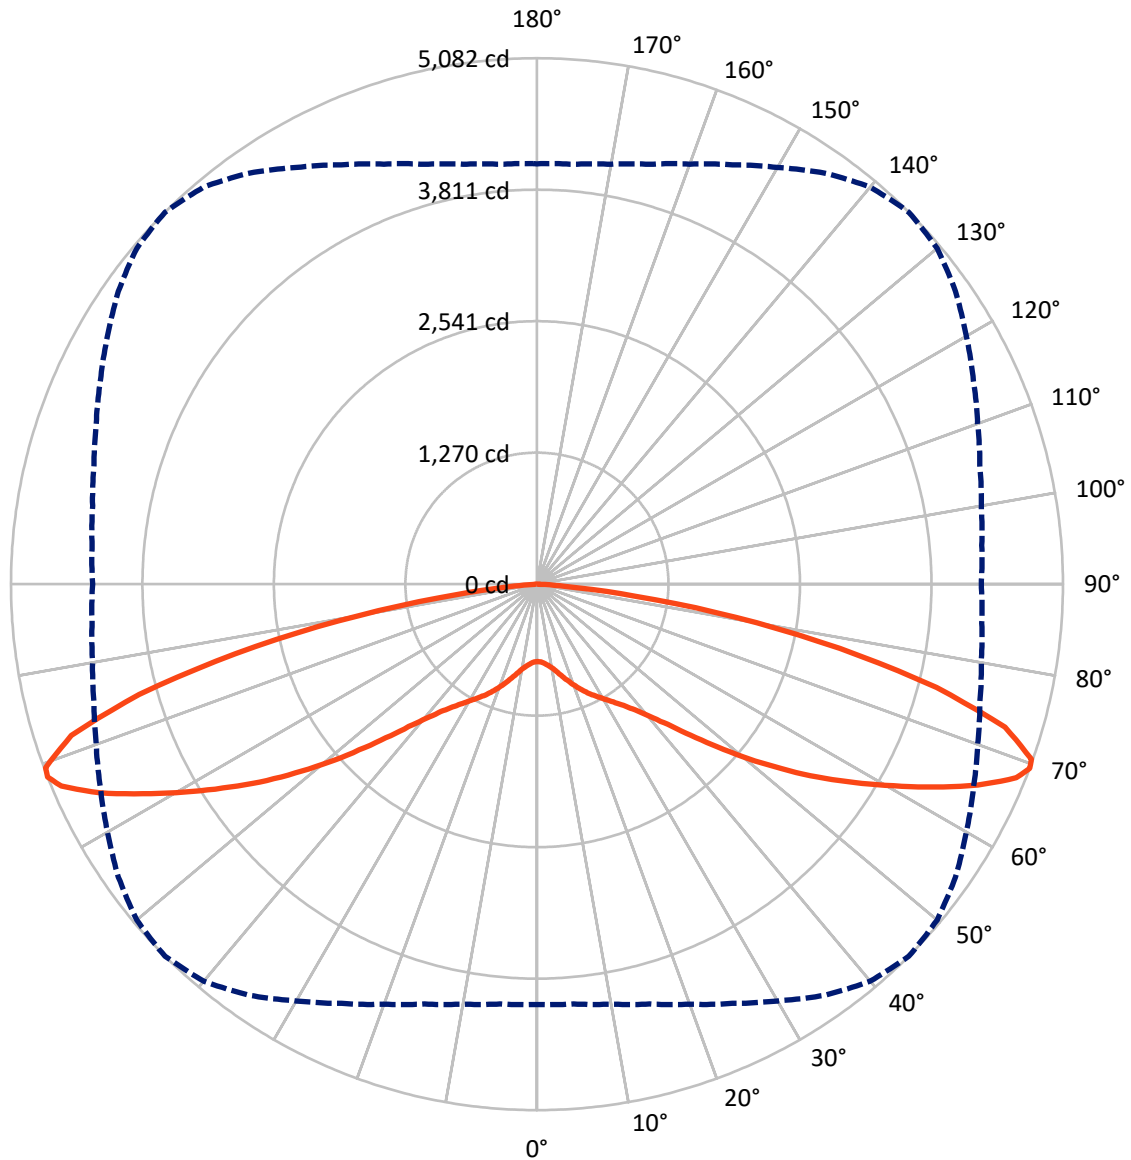

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 69-Deg Vertical

REPORT NUMBER: P148014

CATALOG NUMBER: TMU-F06-LED-E-U-5WQ-7030

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	7201.7	0.0	7201.7
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	7201.7	0.0	7201.7
	% Fixture	50.0	0.0	50.0
Total	Lumens	14403.4	0.0	14403.4
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.1	0.5
10°-20°	265.2	1.8
20°-30°	537.0	3.7
30°-40°	900.4	6.3
40°-50°	1588.1	11.0
50°-60°	2800.7	19.4
60°-70°	4275.8	29.7
70°-80°	3572.9	24.8
80°-90°	388.2	2.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	14403.4	100.0
0°-180°	14403.4	100.0

Coefficient of Utilization



REPORT NUMBER: P148014


CATALOG NUMBER: TMU-F06-LED-E-U-5WQ-7030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	438.7	3.0			
FM	(30°-60°)	2644.6	18.4			
FH	(60°-80°)	3924.3	27.2			G2/5000
FVH	(80°-90°)	194.1	1.3			G2/225
BL	(0°-30°)	438.7	3.0	B1/500		
BM	(30°-60°)	2644.6	18.4	B3/5000		
BH	(60°-80°)	3924.3	27.2	B4/5000		G2/5000
BVH	(80°-90°)	194.1	1.3			G2/225
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B4-U0-G2

Type V Short

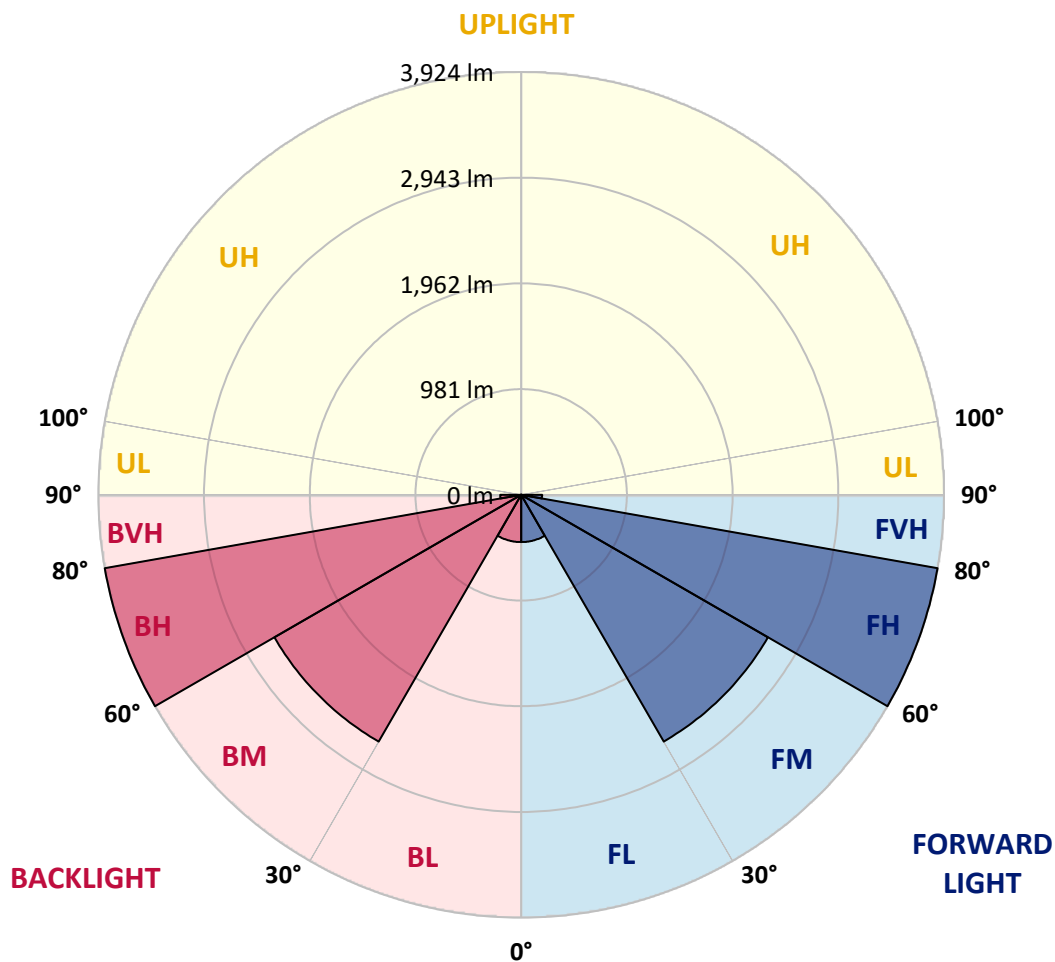



REPORT NUMBER: P148014

CATALOG NUMBER: TMU-F06-LED-E-U-5WQ-7030

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	748.0	748.0	748.0	748.0	748.0	748.0	748.0	748.0	748.0	748.0	748.0
2.5°	754.0	755.5	754.0	754.0	754.0	754.0	754.0	752.5	752.5	752.5	754.0
5°	769.1	770.6	769.1	770.6	770.6	770.6	770.6	769.1	769.1	769.1	769.1
7.5°	793.2	793.2	793.2	794.7	793.2	793.2	794.7	793.2	793.2	793.2	793.2
10°	827.9	826.4	826.4	826.4	826.4	826.4	827.9	827.9	827.9	826.4	826.4
12.5°	870.1	868.6	870.1	870.1	871.6	871.6	871.6	871.6	871.6	871.6	870.1
15°	921.4	921.4	921.4	922.9	925.9	925.9	924.4	925.9	925.9	925.9	925.9
17.5°	978.7	981.7	978.7	980.2	981.7	980.2	983.2	984.7	986.2	984.7	980.2
20°	1037.5	1039.0	1039.0	1039.0	1039.0	1042.0	1043.5	1043.5	1048.1	1046.5	1045.0
22.5°	1093.3	1096.3	1096.3	1097.8	1097.8	1102.3	1102.3	1102.3	1105.4	1108.4	1105.4
25°	1152.1	1150.6	1150.6	1153.6	1155.1	1161.1	1161.1	1164.2	1168.7	1170.2	1167.2
27.5°	1204.9	1203.4	1203.4	1207.9	1209.4	1216.9	1216.9	1223.0	1226.0	1227.5	1224.5
30°	1260.7	1260.7	1259.2	1263.7	1268.2	1274.2	1277.3	1283.3	1287.8	1289.3	1286.3
32.5°	1327.0	1324.0	1325.5	1328.5	1331.6	1337.6	1342.1	1349.6	1355.7	1357.2	1354.2
35°	1402.4	1397.9	1399.4	1402.4	1407.0	1416.0	1423.5	1428.1	1437.1	1440.1	1434.1
37.5°	1485.4	1486.9	1485.4	1492.9	1500.4	1511.0	1520.1	1526.1	1535.1	1539.7	1535.1
40°	1603.0	1598.5	1603.0	1610.5	1622.6	1636.2	1654.3	1658.8	1667.8	1676.9	1666.3
42.5°	1755.3	1752.3	1762.8	1768.9	1782.4	1797.5	1820.1	1832.2	1845.8	1851.8	1842.8
45°	1954.4	1954.4	1966.4	1967.9	1989.0	2008.6	2040.3	2055.4	2081.0	2081.0	2081.0
47.5°	2174.5	2183.6	2191.1	2206.2	2221.3	2257.5	2289.1	2322.3	2346.4	2349.4	2344.9
50°	2402.2	2411.3	2433.9	2455.0	2488.2	2533.4	2568.1	2611.8	2632.9	2651.0	2645.0
52.5°	2654.1	2655.6	2682.7	2709.9	2758.1	2807.9	2863.7	2908.9	2946.6	2963.2	2949.6
55°	2930.0	2933.0	2957.2	2985.8	3040.1	3097.4	3166.8	3213.5	3261.8	3291.9	3269.3
57.5°	3228.6	3230.1	3254.2	3288.9	3353.8	3411.1	3477.4	3543.8	3589.0	3616.2	3601.1
60°	3558.8	3566.4	3584.5	3628.2	3690.0	3750.4	3816.7	3875.5	3928.3	3957.0	3941.9
62.5°	3911.7	3919.3	3944.9	3979.6	4033.9	4100.2	4163.6	4239.0	4282.7	4314.4	4291.7
65°	4148.5	4162.0	4202.8	4249.5	4329.4	4415.4	4489.3	4591.8	4644.6	4682.3	4661.2
67.5°	4163.6	4171.1	4220.9	4291.7	4398.8	4528.5	4679.3	4839.1	4943.2	4992.9	4956.8
69°	4061.0	4071.6	4119.8	4199.7	4318.9	4469.7	4649.1	4848.2	5008.0	5081.9	5047.2
70°	3944.9	3967.5	4020.3	4107.8	4223.9	4382.2	4567.7	4780.3	4967.3	5068.3	5042.7
72.5°	3700.6	3706.6	3741.3	3810.7	3899.7	4030.8	4205.8	4406.3	4584.3	4729.0	4750.2
75°	3284.4	3304.0	3329.6	3376.4	3421.6	3516.6	3634.2	3771.5	3875.5	3987.1	3991.6
77.5°	2482.1	2541.0	2560.6	2571.1	2590.7	2666.1	2768.7	2887.8	2973.8	2991.8	2988.8
80°	1114.4	1192.8	1210.9	1296.9	1349.6	1474.8	1631.6	1814.1	1936.3	1949.8	1916.7
82.5°	218.7	233.7	272.9	340.8	464.5	538.4	640.9	769.1	886.7	954.6	913.8
85°	72.4	76.9	89.0	98.0	113.1	128.2	155.3	193.0	239.8	265.4	236.8
87.5°	28.7	28.7	33.2	36.2	39.2	39.2	39.2	36.2	34.7	28.7	25.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P148014

CATALOG NUMBER: TMU-F06-LED-E-U-5WQ-7030

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	748.0	748.0	748.0	748.0	748.0	748.0	748.0	748.0
2.5°	752.5	752.5	752.5	752.5	752.5	752.5	752.5	752.5
5°	769.1	767.6	767.6	766.1	766.1	766.1	766.1	766.1
7.5°	791.7	790.2	788.7	790.2	788.7	788.7	788.7	788.7
10°	826.4	823.4	821.9	820.3	820.3	820.3	818.8	818.8
12.5°	867.1	867.1	865.6	864.1	861.1	862.6	861.1	858.0
15°	922.9	919.9	918.4	916.9	913.8	913.8	913.8	912.3
17.5°	978.7	975.7	975.7	971.1	969.6	969.6	969.6	971.1
20°	1040.5	1036.0	1033.0	1030.0	1026.9	1028.4	1025.4	1028.4
22.5°	1102.3	1096.3	1093.3	1088.8	1084.2	1084.2	1082.7	1079.7
25°	1162.7	1155.1	1152.1	1147.6	1141.5	1141.5	1138.5	1135.5
27.5°	1220.0	1212.4	1209.4	1200.4	1194.3	1192.8	1189.8	1188.3
30°	1283.3	1274.2	1269.7	1260.7	1251.6	1250.1	1245.6	1245.6
32.5°	1349.6	1340.6	1337.6	1324.0	1316.5	1316.5	1313.5	1310.4
35°	1432.6	1419.0	1416.0	1402.4	1391.9	1391.9	1388.9	1390.4
37.5°	1530.6	1520.1	1509.5	1498.9	1486.9	1485.4	1482.4	1479.3
40°	1661.8	1649.7	1637.7	1622.6	1612.0	1609.0	1604.5	1603.0
42.5°	1836.7	1824.7	1800.5	1788.5	1777.9	1768.9	1767.4	1765.9
45°	2059.9	2044.8	2028.2	2005.6	1992.1	1972.4	1969.4	1961.9
47.5°	2328.3	2299.7	2271.0	2251.4	2230.3	2207.7	2203.2	2191.1
50°	2613.3	2590.7	2542.5	2510.8	2477.6	2455.0	2439.9	2435.4
52.5°	2919.5	2877.2	2829.0	2786.8	2738.5	2708.3	2681.2	2673.7
55°	3239.2	3178.8	3118.5	3068.8	3020.5	2984.3	2958.7	2946.6
57.5°	3558.8	3492.5	3426.1	3371.9	3331.1	3284.4	3258.8	3252.7
60°	3892.1	3828.8	3760.9	3706.6	3656.9	3616.2	3601.1	3572.4
62.5°	4245.0	4178.6	4115.3	4062.5	3999.2	3970.5	3944.9	3928.3
65°	4591.8	4514.9	4435.0	4379.2	4315.9	4275.1	4243.5	4220.9
67.5°	4860.2	4744.1	4637.1	4543.6	4457.6	4394.3	4353.6	4332.4
69°	4935.6	4790.9	4653.6	4531.5	4430.5	4359.6	4314.4	4293.2
70°	4926.6	4766.7	4615.9	4481.7	4371.7	4296.3	4252.5	4213.3
72.5°	4647.6	4501.3	4334.0	4187.7	4088.2	4015.8	3972.0	3950.9
75°	3966.0	3868.0	3747.3	3634.2	3561.9	3519.6	3465.4	3466.9
77.5°	2887.8	2890.8	2809.4	2693.3	2611.8	2596.8	2572.6	2548.5
80°	1791.5	1648.2	1554.7	1429.6	1337.6	1257.7	1223.0	1147.6
82.5°	826.4	645.4	500.7	378.5	291.0	227.7	199.1	162.9
85°	184.0	140.2	116.1	93.5	79.9	73.9	60.3	55.8
87.5°	25.6	22.6	21.1	19.6	16.6	12.1	9.0	7.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)