

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P870522

Luminaire Tested: **MEM2-HSN-SA-130-830-U-T5R**

Issue Date: 09/05/2024

Test Information

Test Method: LM-79-08
Report Number: P870522
Test Lab: INNOVATION CENTER(G3)
Issue Date: 09/05/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: MEM2-HSN-SA-130-830-U-T5R
Description: EPIC MODERN SHORT HOUSING DISCRETE LED ARRAYS 130W 80CRI 3000K
FIXTURE w/ TYPE V ROUND DISTRIBUTION OPTIC
Light Source: (30) 3000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 17066.2 lumens
Efficiency: N/A
Efficacy: 127.4 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.33' x H: 0')
IES Classification: Type V - Short
BUG Rating: B4 - U0 - G2


Input Watts (W): 134
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.99
Total Harmonic Distortion (THDi): 6.70%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

REPORT NUMBER: P870522

CATALOG NUMBER: MEM2-HSN-SA-130-830-U-T5R

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
 - - - 1/2 Max cd

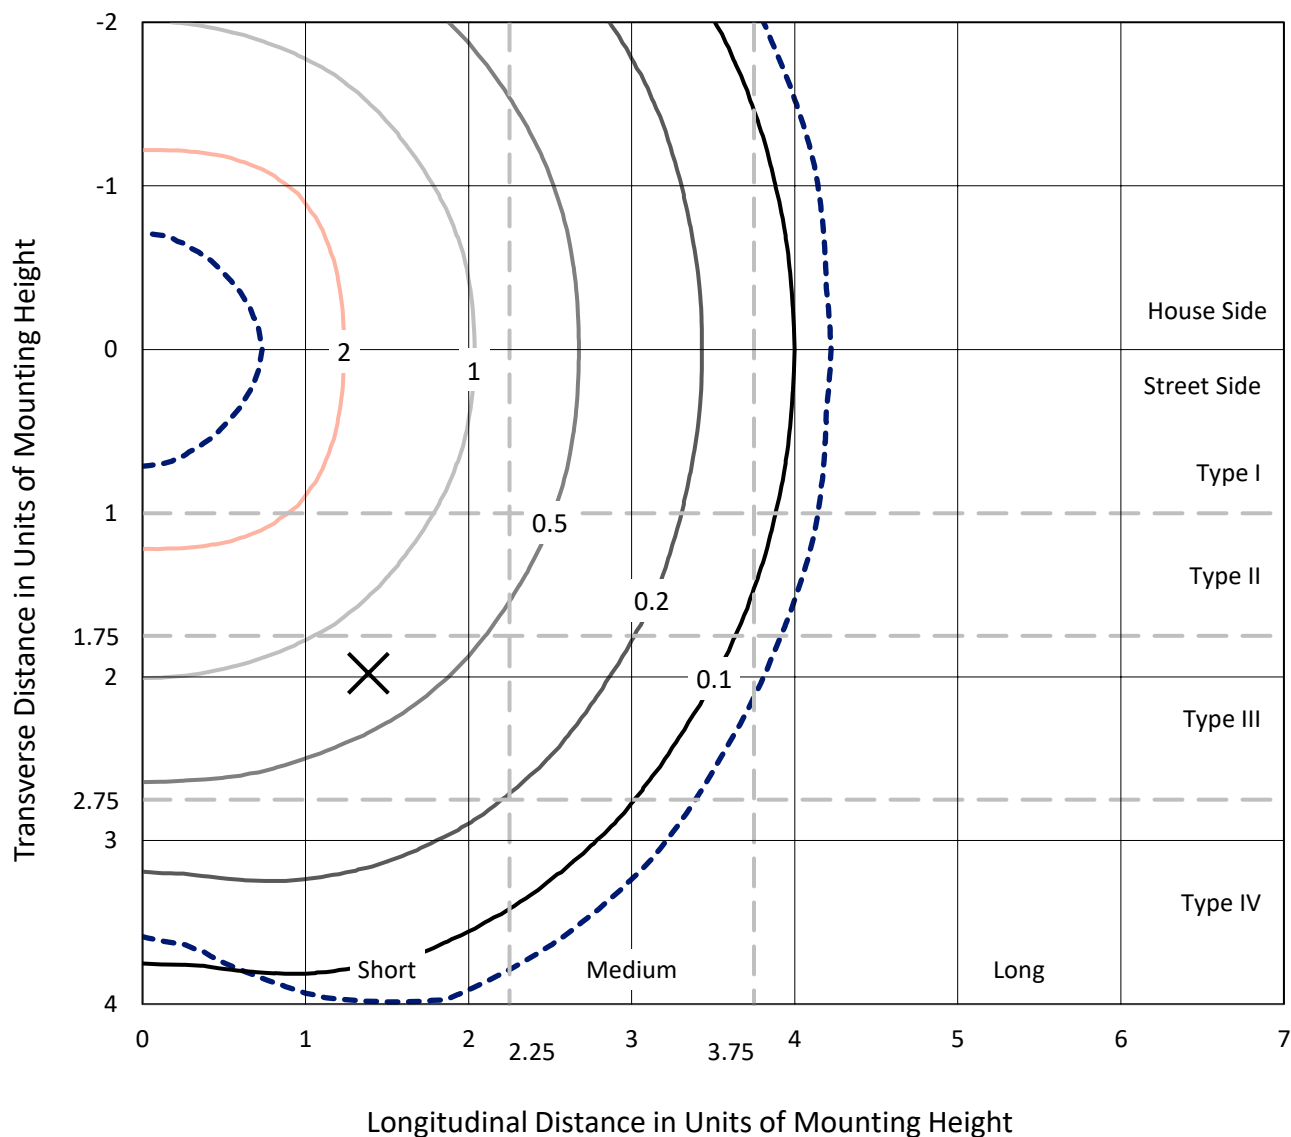


Based on 20 foot mounting height. Maximum calculated value = 4 fc
 Type V - Short - N/A

REPORT NUMBER: P870522

CATALOG NUMBER: MEM2-HSN-SA-130-830-U-T5R

Luminous Intensity Polar Plot

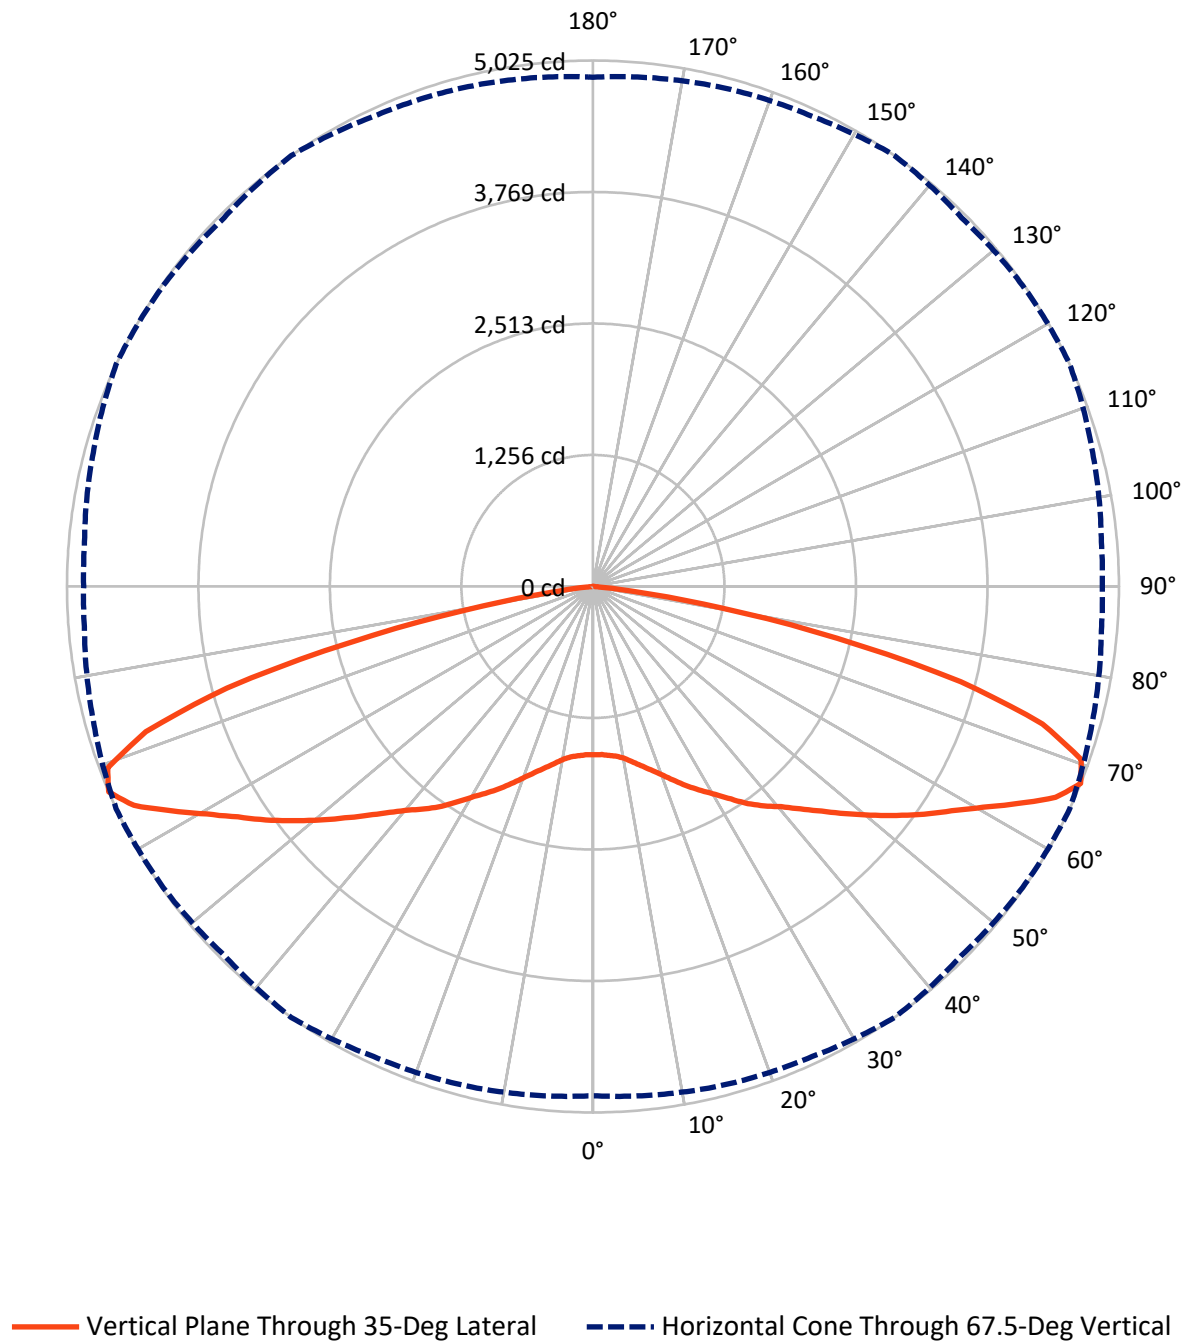

REPORT NUMBER: P870522

CATALOG NUMBER: MEM2-HSN-SA-130-830-U-T5R


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	8533.1	0.0	8533.1
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	8533.1	0.0	8533.1
	% Fixture	50.0	0.0	50.0
Total	Lumens	17066.2	0.0	17066.2
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.3	0.9
10°-20°	512.4	3.0
20°-30°	979.3	5.7
30°-40°	1582.5	9.3
40°-50°	2316.2	13.6
50°-60°	3321.3	19.5
60°-70°	4655.1	27.3
70°-80°	3284.7	19.2
80°-90°	258.6	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	17066.2	100.0
0°-180°	17066.2	100.0

Coefficient of Utilization

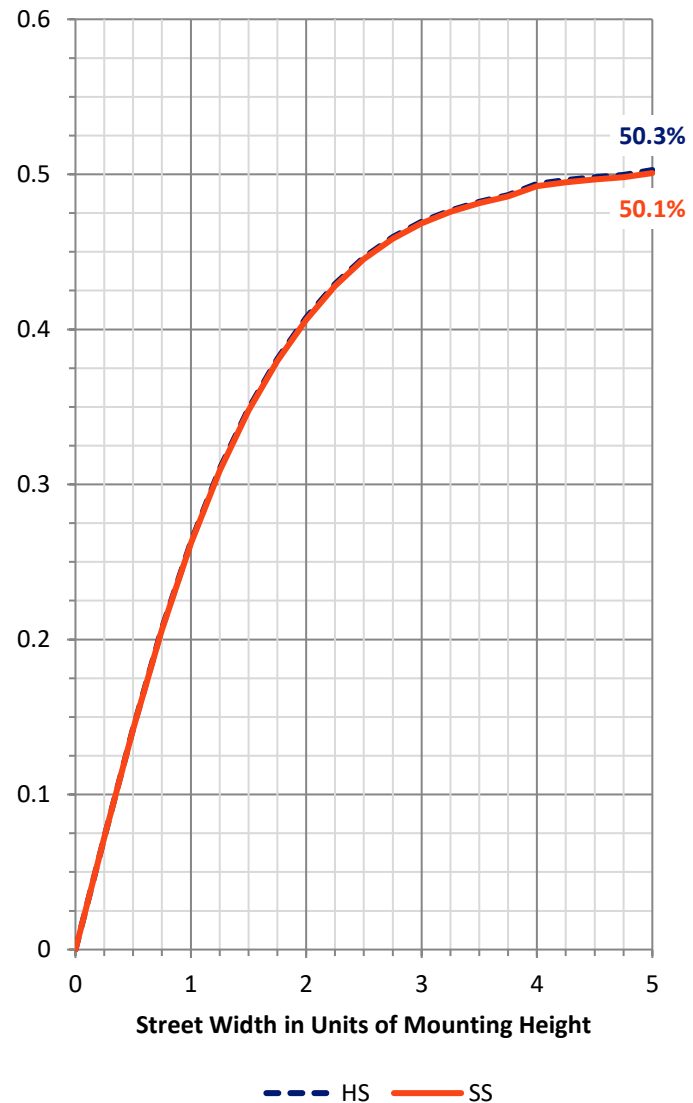

REPORT NUMBER: P870522


CATALOG NUMBER: MEM2-HSN-SA-130-830-U-T5R

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	824.0	4.8			
FM	(30°-60°)	3610.0	21.2			
FH	(60°-80°)	3969.9	23.3			G2/5000
FVH	(80°-90°)	129.3	0.8			G2/225
BL	(0°-30°)	824.0	4.8	B2/1000		
BM	(30°-60°)	3610.0	21.2	B3/5000		
BH	(60°-80°)	3969.9	23.3	B4/5000		G2/5000
BVH	(80°-90°)	129.3	0.8			G2/225
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B4-U0-G2

Type V Short

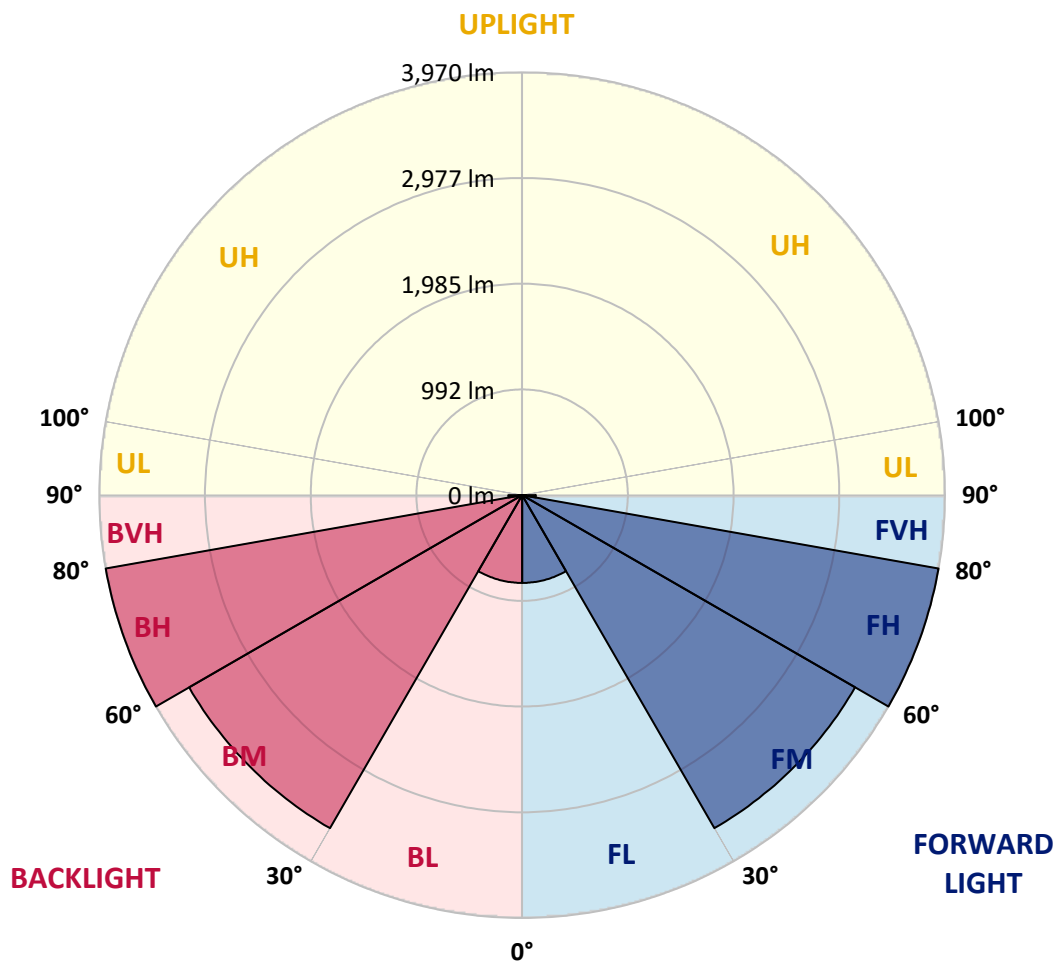

REPORT NUMBER: P870522

CATALOG NUMBER: MEM2-HSN-SA-130-830-U-T5R

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	1607.6	1607.6	1607.6	1607.6	1607.6	1607.6	1607.6	1607.6	1607.6	1607.6	1607.6
2.5°	1617.6	1614.2	1610.9	1610.9	1607.6	1610.9	1607.6	1610.9	1607.6	1607.6	1607.6
5°	1627.5	1624.2	1624.2	1624.2	1620.9	1620.9	1620.9	1620.9	1617.6	1614.2	1617.6
7.5°	1637.5	1637.5	1634.2	1640.8	1637.5	1640.8	1640.8	1644.1	1637.5	1634.2	1637.5
10°	1664.1	1664.1	1664.1	1670.7	1670.7	1680.7	1680.7	1684.0	1680.7	1674.0	1674.0
12.5°	1720.5	1717.2	1717.2	1717.2	1723.8	1730.5	1737.1	1737.1	1733.8	1723.8	1723.8
15°	1783.6	1790.3	1783.6	1780.3	1783.6	1790.3	1796.9	1796.9	1793.6	1790.3	1790.3
17.5°	1860.0	1863.4	1856.7	1850.1	1850.1	1860.0	1863.4	1863.4	1860.0	1853.4	1853.4
20°	1926.5	1929.8	1929.8	1926.5	1929.8	1936.4	1939.7	1943.1	1933.1	1923.1	1923.1
22.5°	1982.9	1986.2	1992.9	2006.2	2019.5	2026.1	2022.8	2022.8	2006.2	1996.2	1992.9
25°	2052.7	2062.6	2075.9	2092.5	2115.8	2132.4	2125.7	2112.5	2099.2	2079.2	2075.9
27.5°	2188.9	2188.9	2175.6	2182.2	2208.8	2225.4	2218.7	2208.8	2182.2	2168.9	2165.6
30°	2295.1	2295.1	2295.1	2288.5	2305.1	2325.0	2318.4	2301.8	2288.5	2281.9	2281.9
32.5°	2398.1	2391.5	2401.4	2414.7	2421.4	2428.0	2428.0	2414.7	2391.5	2381.5	2381.5
35°	2494.4	2501.1	2511.0	2531.0	2547.6	2537.6	2521.0	2511.0	2487.8	2467.9	2467.9
37.5°	2587.4	2594.1	2604.0	2633.9	2660.5	2657.2	2637.3	2610.7	2580.8	2564.2	2554.2
40°	2653.9	2657.2	2683.8	2730.3	2766.8	2780.1	2763.5	2726.9	2680.4	2647.2	2650.5
42.5°	2733.6	2740.2	2783.4	2849.8	2903.0	2922.9	2899.7	2849.8	2783.4	2740.2	2740.2
45°	2849.8	2853.2	2909.6	2992.7	3062.4	3095.6	3062.4	2992.7	2906.3	2863.1	2859.8
47.5°	2966.1	2976.0	3039.2	3138.8	3241.8	3281.6	3245.1	3155.4	3052.4	2999.3	2992.7
50°	3098.9	3105.6	3182.0	3318.2	3434.4	3487.6	3441.1	3328.1	3215.2	3148.8	3152.1
52.5°	3228.5	3248.4	3351.4	3494.2	3633.7	3693.5	3627.1	3504.2	3384.6	3321.5	3318.2
55°	3421.1	3444.4	3534.1	3693.5	3839.6	3906.1	3843.0	3706.8	3577.2	3507.5	3494.2
57.5°	3663.6	3676.9	3756.6	3919.3	4042.2	4105.4	4068.8	3942.6	3819.7	3733.3	3716.7
60°	3939.3	3952.6	4015.7	4181.7	4281.4	4327.9	4314.6	4241.5	4158.5	4118.6	4108.7
62.5°	4331.2	4334.5	4367.7	4464.1	4563.7	4583.6	4550.4	4533.8	4560.4	4517.2	4527.2
65°	4779.6	4779.6	4769.6	4782.9	4859.3	4836.1	4812.8	4885.9	4872.6	4799.5	4786.3
67.5°	4866.0	4885.9	4925.8	4955.6	5025.4	4982.2	5012.1	5025.4	4942.4	4875.9	4866.0
70°	4354.5	4377.7	4600.3	4736.4	4949.0	4988.9	4892.5	4842.7	4749.7	4626.8	4593.6
72.5°	2969.4	3085.7	3726.7	4165.1	4490.6	4540.5	4487.3	4424.2	4238.2	4141.9	4075.5
75°	2371.5	2434.6	3005.9	3437.7	3630.4	3627.1	3414.5	3344.7	3198.6	3185.3	3198.6
77.5°	1448.2	1461.5	2022.8	2361.6	2384.8	2371.5	2285.2	2232.0	2252.0	2152.3	2168.9
80°	441.8	481.6	763.9	1152.6	1238.9	1199.1	1182.4	1202.4	1222.3	1252.2	1298.7
82.5°	89.7	112.9	152.8	332.1	378.6	375.3	372.0	411.9	448.4	465.0	564.7
85°	10.0	10.0	13.3	26.6	56.5	89.7	93.0	83.0	126.2	122.9	86.4
87.5°	3.3	3.3	3.3	3.3	3.3	6.6	6.6	6.6	6.6	6.6	6.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Streetworks

Report Number: SP1-2407-157-7

Test Date: 09/05/2024

Luminaire Tested: MEM2-HTN-SA-30-830-U-5WQ

Data in this report applies to families of products including MEM2-HTN-SA-30-830-U-5WQ


Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-157-7
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 09/05/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Streetworks
 Catalog Number: **MEM2-HTN-SA-30-830-U-5WQ**
 Description: Epic Modern Light Square 30W 5WQ Optic

Spectral Parameters

CCT (K): 3126
 CIE u' : 0.2465
 CIE v' : 0.5182
 Duv: -0.0004
 CIE x: 0.4277
 CIE y: 0.3997
 CIE z: 0.1727
 Peak Wavelength (nm): 601
 Dominant Wavelength (nm): 582
 Purity: 48.31913
 R_f: 84.4
 R_g: 94.7

CRI (Ra): 82.6
 R1: 81.4
 R2: 92.2
 R3: 94.9
 R4: 80.1
 R5: 81.8
 R6: 90.5
 R7: 81.8
 R8: 58.0
 R9: 5.1
 R10: 82.2
 R11: 79.8
 R12: 70.4
 R13: 84.2
 R14: 97.9
 R15: 73.6

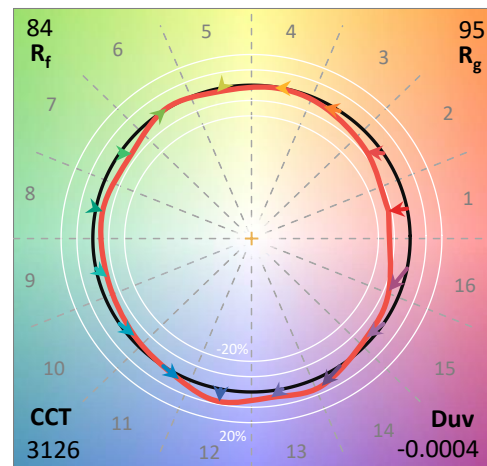

Test Conditions


Stabilization Time: 22M
 Operation Time: 1H 22M
 Sphere Temperature (°C): 24.3

REPORT NUMBER: SP1-2407-157-7


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/24/2023	10/24/2024
DC Power Source	IN0208	10/24/2023	10/24/2024
Sphere Thermometer	IN0085	10/24/2023	10/24/2024
Room Thermometer	IN0046	10/24/2023	10/24/2024

REPORT NUMBER: SP1-2407-157-7

CIE 1931 Chromaticity Diagram

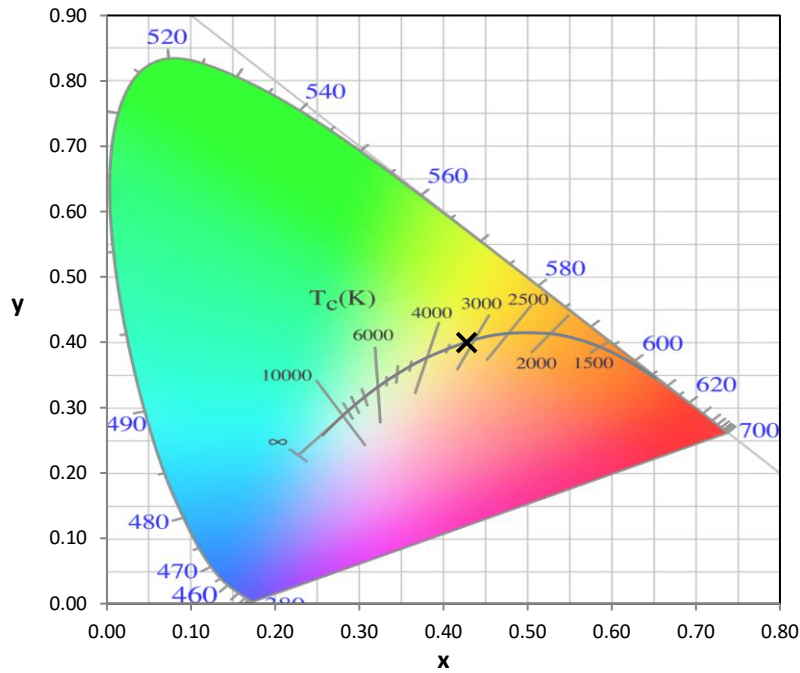


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

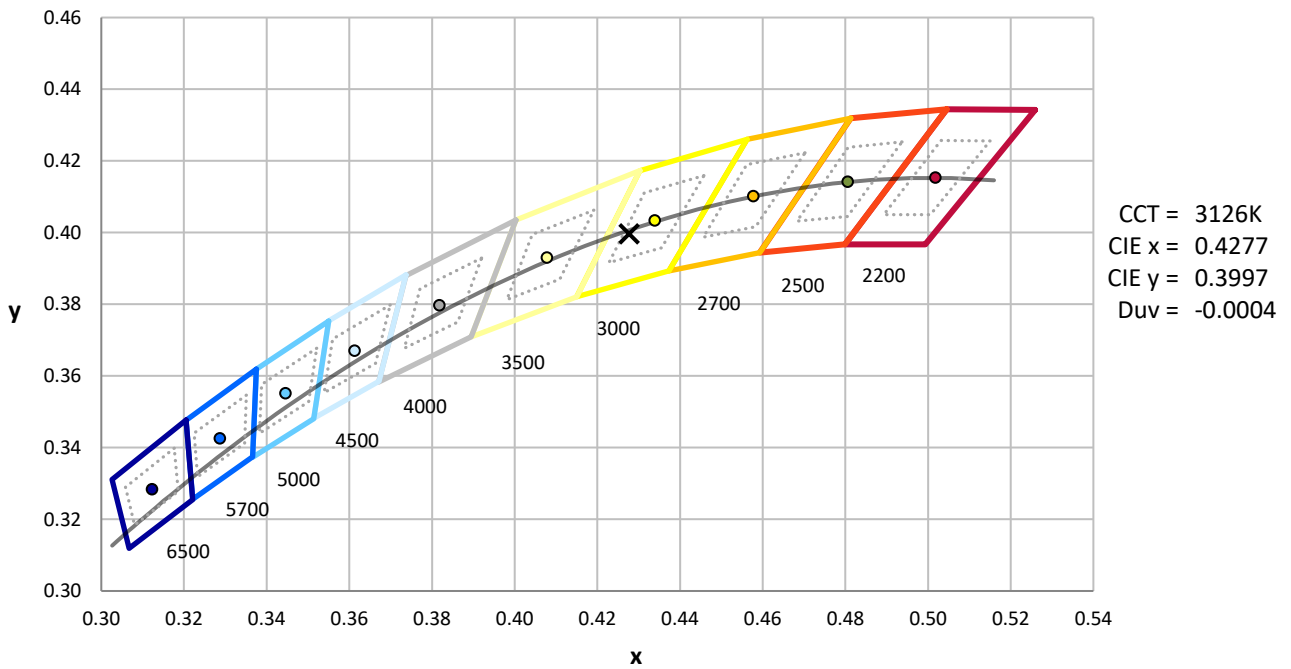

Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2407-157-7

Photopic Flux vs. Wavelength

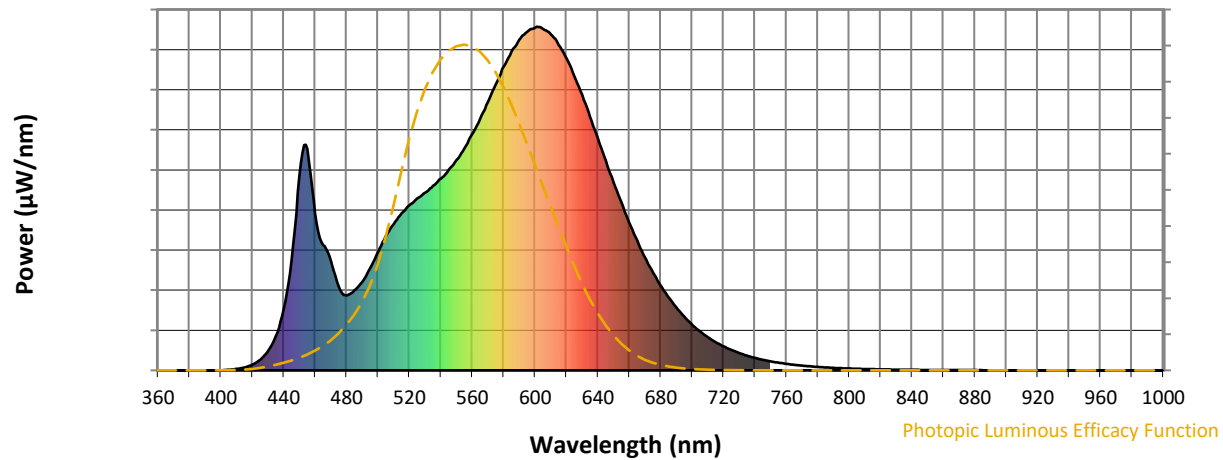


Photopic Lumens: NR

λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^{\wedge}/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	258	NR	620	908	NR	750	26	NR	880	1	NR
365	0	NR	495	297	NR	625	857	NR	755	22	NR	885	0	NR
370	0	NR	500	345	NR	630	801	NR	760	19	NR	890	0	NR
375	0	NR	505	391	NR	635	738	NR	765	16	NR	895	0	NR
380	0	NR	510	426	NR	640	675	NR	770	14	NR	900	0	NR
385	0	NR	515	456	NR	645	610	NR	775	12	NR	905	0	NR
390	0	NR	520	480	NR	650	547	NR	780	10	NR	910	0	NR
395	0	NR	525	500	NR	655	488	NR	785	9	NR	915	0	NR
400	0	NR	530	517	NR	660	429	NR	790	7	NR	920	0	NR
405	2	NR	535	538	NR	665	378	NR	795	6	NR	925	0	NR
410	4	NR	540	558	NR	670	328	NR	800	5	NR	930	0	NR
415	9	NR	545	584	NR	675	285	NR	805	5	NR	935	0	NR
420	16	NR	550	611	NR	680	247	NR	810	4	NR	940	0	NR
425	31	NR	555	646	NR	685	212	NR	815	3	NR	945	0	NR
430	56	NR	560	687	NR	690	183	NR	820	3	NR	950	0	NR
435	101	NR	565	731	NR	695	156	NR	825	3	NR	955	0	NR
440	178	NR	570	780	NR	700	133	NR	830	2	NR	960	0	NR
445	323	NR	575	832	NR	705	114	NR	835	2	NR	965	0	NR
450	566	NR	580	883	NR	710	96	NR	840	2	NR	970	0	NR
455	645	NR	585	927	NR	715	82	NR	845	1	NR	975	0	NR
460	457	NR	590	963	NR	720	70	NR	850	1	NR	980	0	NR
465	365	NR	595	985	NR	725	59	NR	855	1	NR	985	0	NR
470	317	NR	600	998	NR	730	50	NR	860	1	NR	990	0	NR
475	244	NR	605	994	NR	735	43	NR	865	1	NR	995	0	NR
480	218	NR	610	978	NR	740	36	NR	870	1	NR	1000	0	NR
485	233	NR	615	947	NR	745	31	NR	875	1	NR			

REPORT NUMBER: SP1-2407-157-7

Scotopic Flux vs. Wavelength

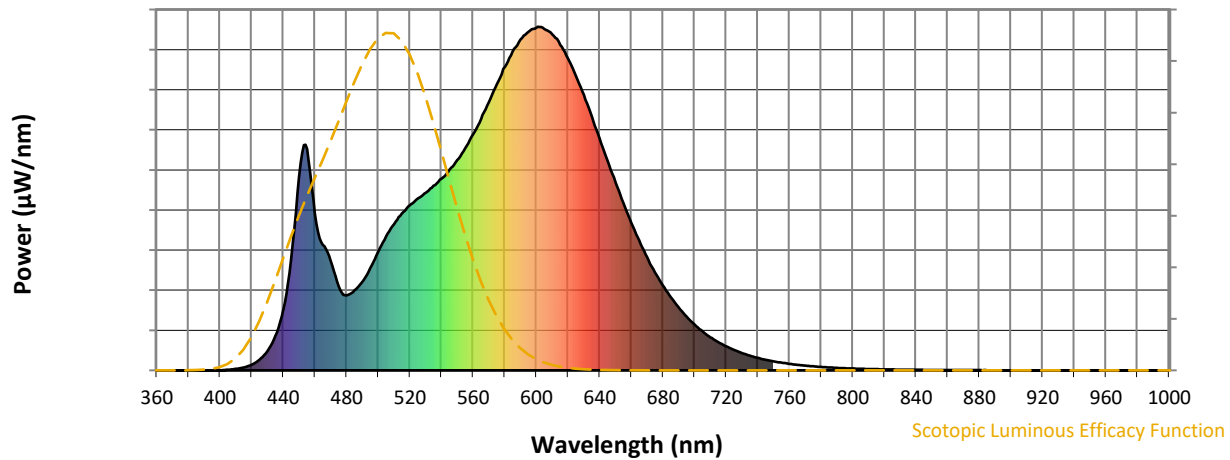


Scotopic Lumens: NR

S/P: 1.42

λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	258	NR	620	908	NR	750	26	NR	880	1	NR
365	0	NR	495	297	NR	625	857	NR	755	22	NR	885	0	NR
370	0	NR	500	345	NR	630	801	NR	760	19	NR	890	0	NR
375	0	NR	505	391	NR	635	738	NR	765	16	NR	895	0	NR
380	0	NR	510	426	NR	640	675	NR	770	14	NR	900	0	NR
385	0	NR	515	456	NR	645	610	NR	775	12	NR	905	0	NR
390	0	NR	520	480	NR	650	547	NR	780	10	NR	910	0	NR
395	0	NR	525	500	NR	655	488	NR	785	9	NR	915	0	NR
400	0	NR	530	517	NR	660	429	NR	790	7	NR	920	0	NR
405	2	NR	535	538	NR	665	378	NR	795	6	NR	925	0	NR
410	4	NR	540	558	NR	670	328	NR	800	5	NR	930	0	NR
415	9	NR	545	584	NR	675	285	NR	805	5	NR	935	0	NR
420	16	NR	550	611	NR	680	247	NR	810	4	NR	940	0	NR
425	31	NR	555	646	NR	685	212	NR	815	3	NR	945	0	NR
430	56	NR	560	687	NR	690	183	NR	820	3	NR	950	0	NR
435	101	NR	565	731	NR	695	156	NR	825	3	NR	955	0	NR
440	178	NR	570	780	NR	700	133	NR	830	2	NR	960	0	NR
445	323	NR	575	832	NR	705	114	NR	835	2	NR	965	0	NR
450	566	NR	580	883	NR	710	96	NR	840	2	NR	970	0	NR
455	645	NR	585	927	NR	715	82	NR	845	1	NR	975	0	NR
460	457	NR	590	963	NR	720	70	NR	850	1	NR	980	0	NR
465	365	NR	595	985	NR	725	59	NR	855	1	NR	985	0	NR
470	317	NR	600	998	NR	730	50	NR	860	1	NR	990	0	NR
475	244	NR	605	994	NR	735	43	NR	865	1	NR	995	0	NR
480	218	NR	610	978	NR	740	36	NR	870	1	NR	1000	0	NR
485	233	NR	615	947	NR	745	31	NR	875	1	NR			

REPORT NUMBER: SP1-2407-157-7

Melanopic Flux vs. Wavelength

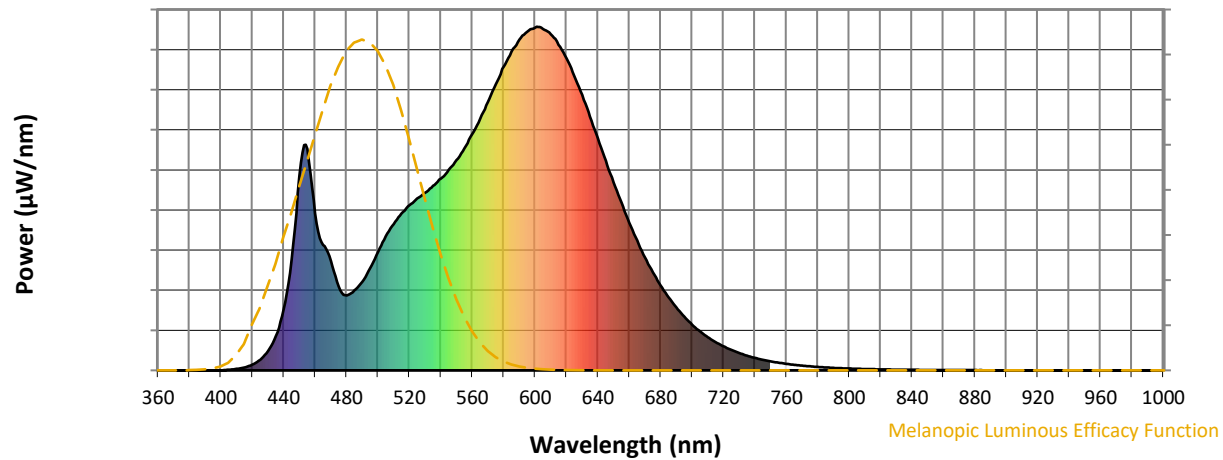

Melanopic Lumens: NR

M/P: 2.79


λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)	λ (nm)	Power $\text{W}^\wedge/\text{nm}$	Lumens (ϕ/nm)
360	0	NR	490	258	NR	620	908	NR	750	26	NR	880	1	NR
365	0	NR	495	297	NR	625	857	NR	755	22	NR	885	0	NR
370	0	NR	500	345	NR	630	801	NR	760	19	NR	890	0	NR
375	0	NR	505	391	NR	635	738	NR	765	16	NR	895	0	NR
380	0	NR	510	426	NR	640	675	NR	770	14	NR	900	0	NR
385	0	NR	515	456	NR	645	610	NR	775	12	NR	905	0	NR
390	0	NR	520	480	NR	650	547	NR	780	10	NR	910	0	NR
395	0	NR	525	500	NR	655	488	NR	785	9	NR	915	0	NR
400	0	NR	530	517	NR	660	429	NR	790	7	NR	920	0	NR
405	2	NR	535	538	NR	665	378	NR	795	6	NR	925	0	NR
410	4	NR	540	558	NR	670	328	NR	800	5	NR	930	0	NR
415	9	NR	545	584	NR	675	285	NR	805	5	NR	935	0	NR
420	16	NR	550	611	NR	680	247	NR	810	4	NR	940	0	NR
425	31	NR	555	646	NR	685	212	NR	815	3	NR	945	0	NR
430	56	NR	560	687	NR	690	183	NR	820	3	NR	950	0	NR
435	101	NR	565	731	NR	695	156	NR	825	3	NR	955	0	NR
440	178	NR	570	780	NR	700	133	NR	830	2	NR	960	0	NR
445	323	NR	575	832	NR	705	114	NR	835	2	NR	965	0	NR
450	566	NR	580	883	NR	710	96	NR	840	2	NR	970	0	NR
455	645	NR	585	927	NR	715	82	NR	845	1	NR	975	0	NR
460	457	NR	590	963	NR	720	70	NR	850	1	NR	980	0	NR
465	365	NR	595	985	NR	725	59	NR	855	1	NR	985	0	NR
470	317	NR	600	998	NR	730	50	NR	860	1	NR	990	0	NR
475	244	NR	605	994	NR	735	43	NR	865	1	NR	995	0	NR
480	218	NR	610	978	NR	740	36	NR	870	1	NR	1000	0	NR
485	233	NR	615	947	NR	745	31	NR	875	1	NR			

REPORT NUMBER: SP1-2407-157-7





TM-30-18

Summary

$R_f = 84.4$
 $R_g = 94.7$
 $CIE R_a = 82.6$
 $R_9 = 5.1$

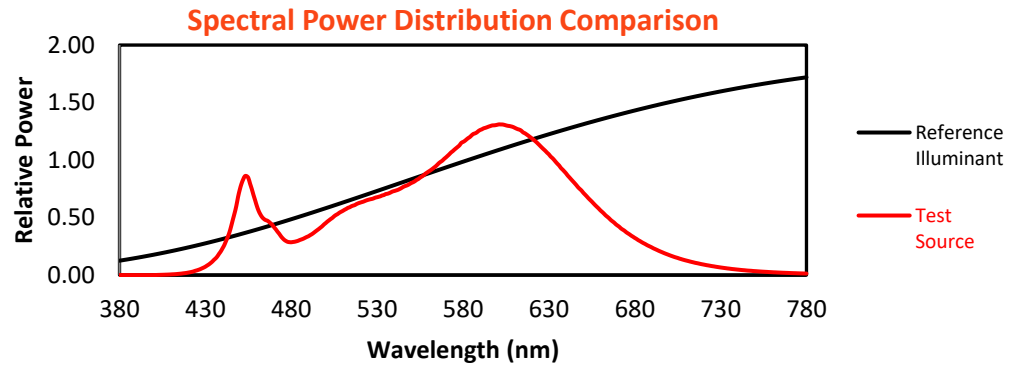





Color Vector Graphics

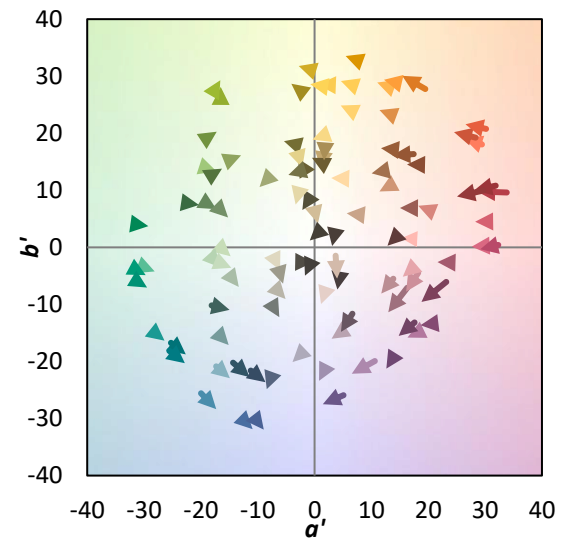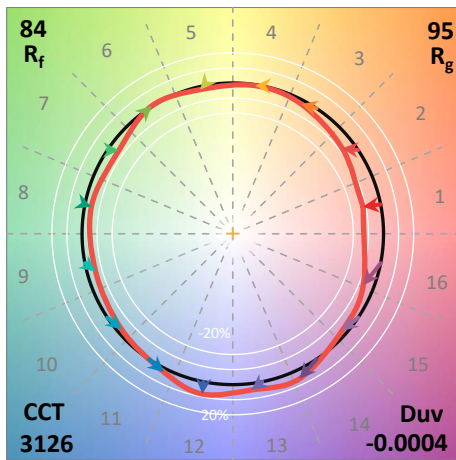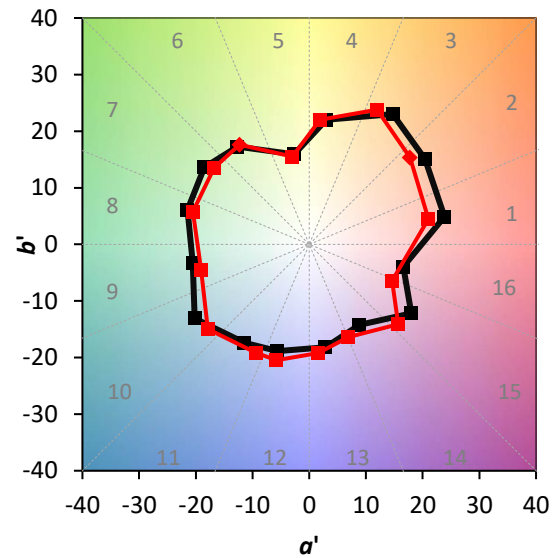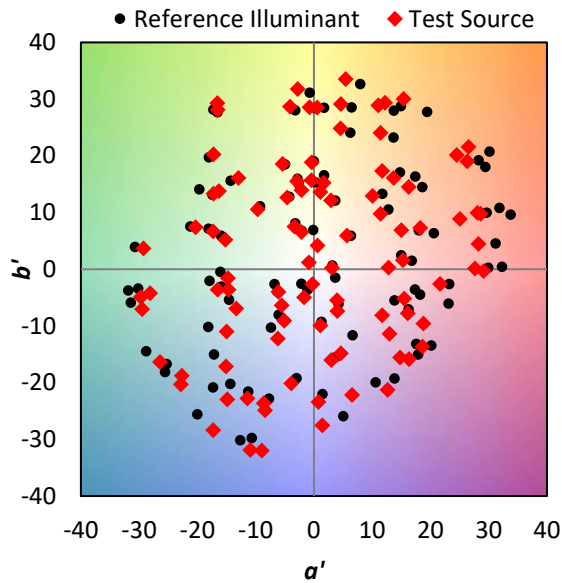



Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 86	CES26 = 86	CES51 = 93	CES76 = 82
CES02 = 63	CES27 = 92	CES52 = 93	CES77 = 84
CES03 = 31	CES28 = 94	CES53 = 89	CES78 = 81
CES04 = 70	CES29 = 92	CES54 = 89	CES79 = 90
CES05 = 49	CES30 = 91	CES55 = 86	CES80 = 89
CES06 = 51	CES31 = 93	CES56 = 85	CES81 = 72
CES07 = 42	CES32 = 85	CES57 = 83	CES82 = 95
CES08 = 41	CES33 = 97	CES58 = 84	CES83 = 94
CES09 = 29	CES34 = 92	CES59 = 91	CES84 = 91
CES10 = 76	CES35 = 96	CES60 = 90	CES85 = 74
CES11 = 59	CES36 = 81	CES61 = 87	CES86 = 68
CES12 = 65	CES37 = 96	CES62 = 83	CES87 = 84
CES13 = 43	CES38 = 86	CES63 = 87	CES88 = 88
CES14 = 74	CES39 = 98	CES64 = 79	CES89 = 75
CES15 = 71	CES40 = 96	CES65 = 78	CES90 = 89
CES16 = 47	CES41 = 96	CES66 = 77	CES91 = 73
CES17 = 50	CES42 = 97	CES67 = 76	CES92 = 63
CES18 = 56	CES43 = 91	CES68 = 80	CES93 = 77
CES19 = 72	CES44 = 99	CES69 = 85	CES94 = 61
CES20 = 66	CES45 = 93	CES70 = 78	CES95 = 73
CES21 = 87	CES46 = 90	CES71 = 74	CES96 = 84
CES22 = 79	CES47 = 94	CES72 = 91	CES97 = 88
CES23 = 92	CES48 = 83	CES73 = 74	CES98 = 85
CES24 = 91	CES49 = 91	CES74 = 90	CES99 = 76
CES25 = 72	CES50 = 93	CES75 = 78	

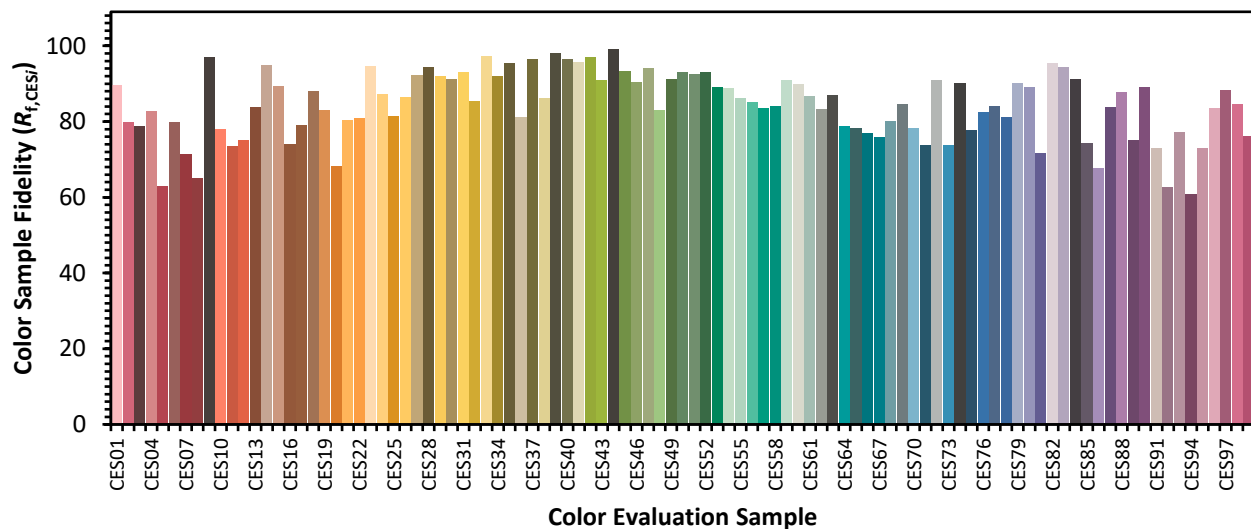

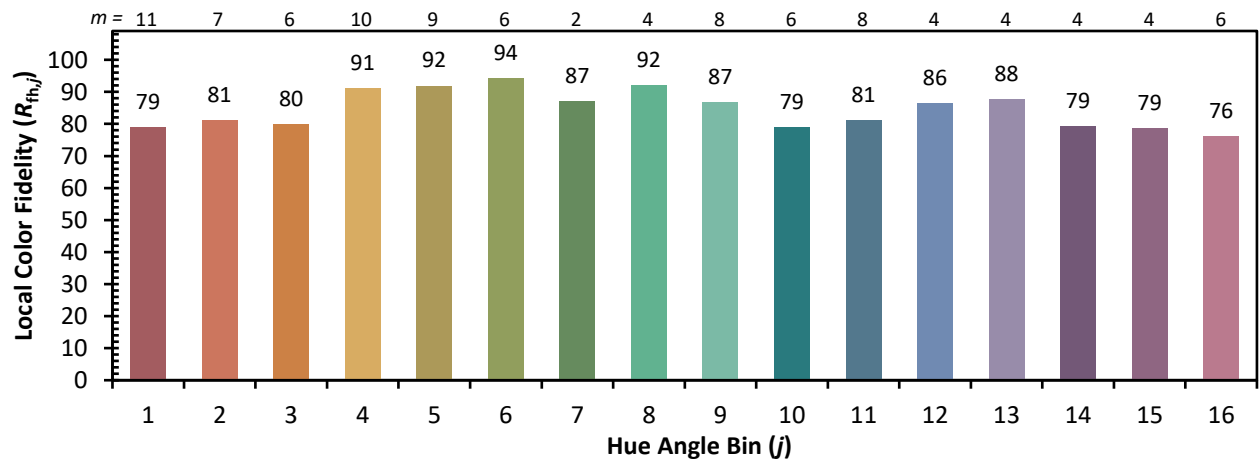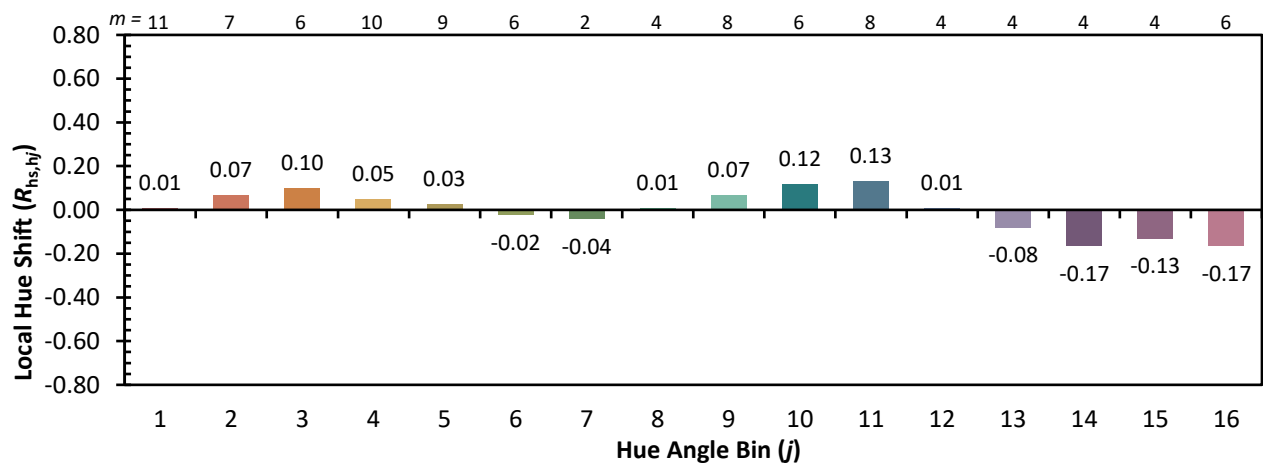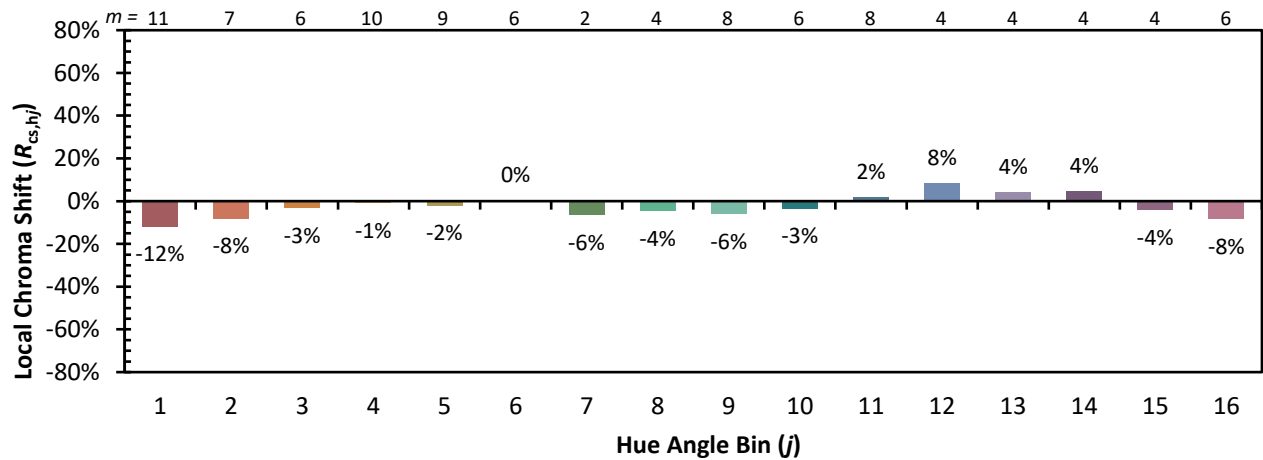Color Rendition by Hue-Angle Bin


Measure Comparisons

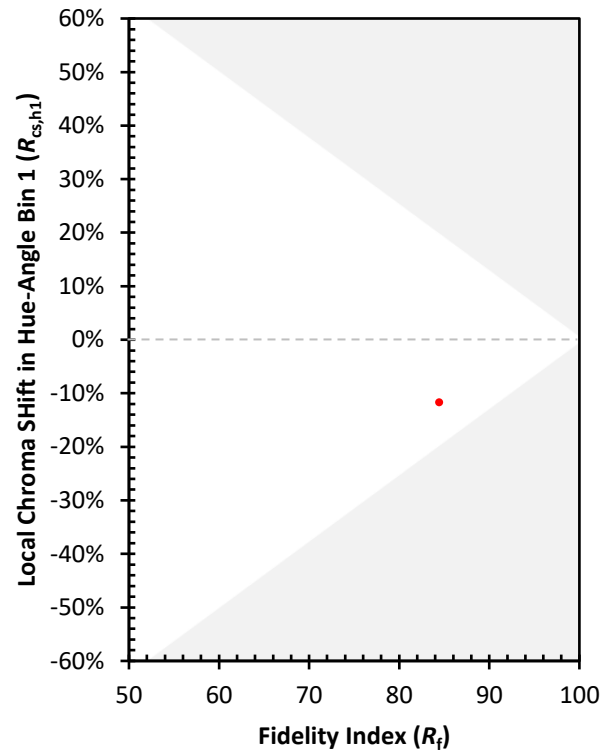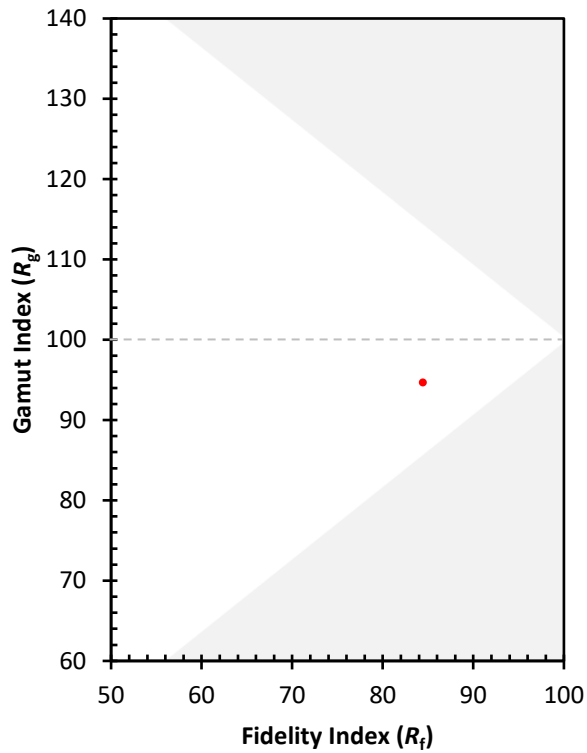

(END OF REPORT)