

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P867758

Luminaire Tested: **MEM2-HTN-SA-60-730-U-T5R**

Issue Date: 08/21/2024



Test Information

Test Method: LM-79-08
Report Number: P867758
Test Lab: INNOVATION CENTER(G3)
Issue Date: 08/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: MEM2-HTN-SA-60-730-U-T5R
Description: EPIC MODERN TALL HOUSING DISCRETE LED ARRAYS 60W 70CRI 3000K
FIXTURE w/ TYPE V ROUND DISTRIBUTION OPTIC
Light Source: (10) 3000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6043 lumens
Efficiency: N/A
Efficacy: 137.3 lumens/watt
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
IES Classification: Type V - Short
BUG Rating: B3 - U0 - G1

Input Watts (W): 44
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: 0.99
Total Harmonic Distortion (THDi): 6.91%
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

REPORT NUMBER: P867758
 CATALOG NUMBER: MEM2-HTN-SA-60-730-U-T5R

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

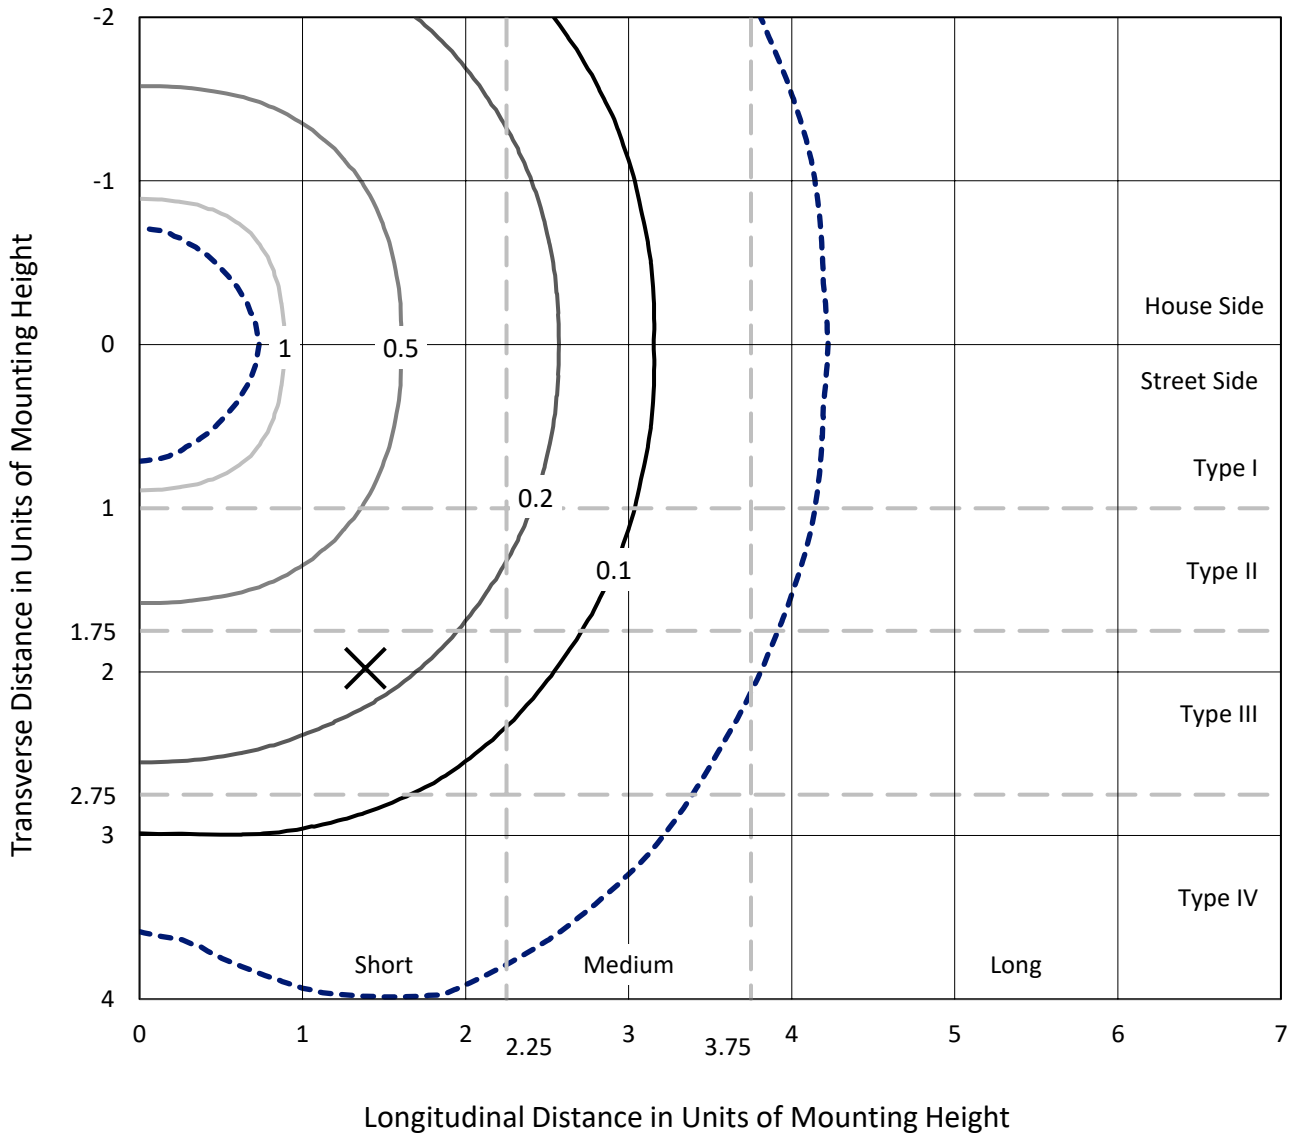

Based on 20 foot mounting height. Maximum calculated value = 1.4 fc
 Type V - Short - N/A

REPORT NUMBER: P867758
CATALOG NUMBER: MEM2-HTN-SA-60-730-U-T5R

Luminous Intensity Polar Plot

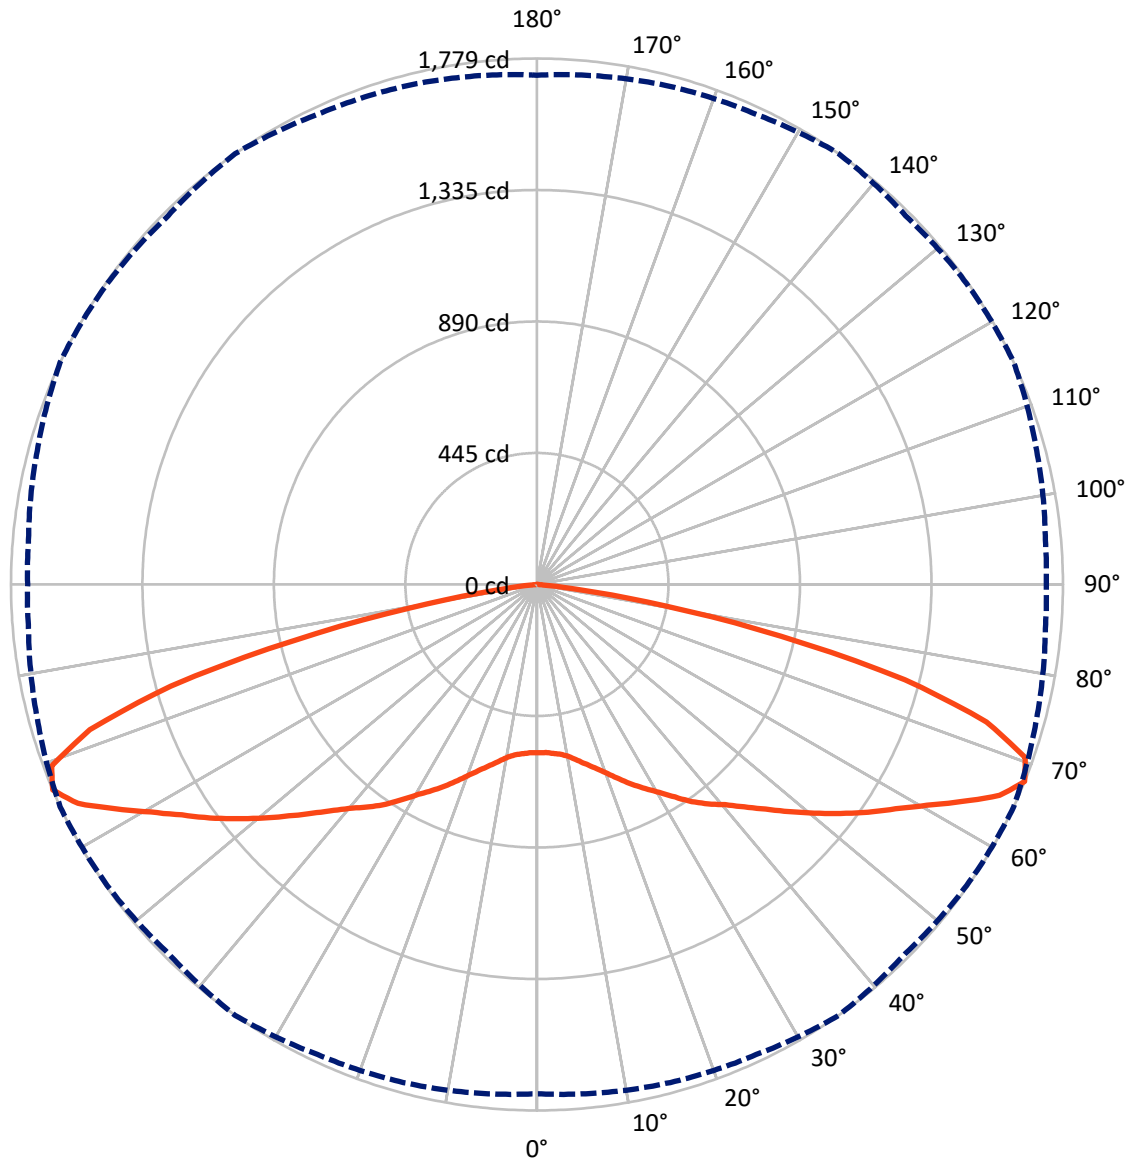

— Vertical Plane Through 35-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P867758
 CATALOG NUMBER: MEM2-HTN-SA-60-730-U-T5R

FLUX DISTRIBUTION:

| | | Downward | Upward | Total |
|--------------------|-----------|----------|--------|--------|
| House Side | Lumens | 3021.5 | 0.0 | 3021.5 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Street Side | Lumens | 3021.5 | 0.0 | 3021.5 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Total | Lumens | 6043.0 | 0.0 | 6043.0 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 55.3 | 0.9 |
| 10°-20° | 181.4 | 3.0 |
| 20°-30° | 346.7 | 5.7 |
| 30°-40° | 560.3 | 9.3 |
| 40°-50° | 820.1 | 13.6 |
| 50°-60° | 1176.1 | 19.5 |
| 60°-70° | 1648.3 | 27.3 |
| 70°-80° | 1163.1 | 19.2 |
| 80°-90° | 91.6 | 1.5 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 6043.0 | 100.0 |
| 0°-180° | 6043.0 | 100.0 |

Coefficient of Utilization



REPORT NUMBER: P867758


CATALOG NUMBER: MEM2-HTN-SA-60-730-U-T5R

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | Lumens | % Fixture | Zone Rating/Lumen Limit | | |
|----------------|--------|-----------|-------------------------|------|---------|
| | | | B | U | G |
| FL (0°-30°) | 291.8 | 4.8 | | | |
| FM (30°-60°) | 1278.3 | 21.2 | | | |
| FH (60°-80°) | 1405.7 | 23.3 | | | G1/1800 |
| FVH (80°-90°) | 45.8 | 0.8 | | | G1/100 |
| BL (0°-30°) | 291.8 | 4.8 | B1/500 | | |
| BM (30°-60°) | 1278.3 | 21.2 | B2/2500 | | |
| BH (60°-80°) | 1405.7 | 23.3 | B3/2500 | | G1/1800 |
| BVH (80°-90°) | 45.8 | 0.8 | | | G1/100 |
| UL (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH (100°-180°) | 0.0 | 0.0 | | U0/0 | |

BUG Rating: B3-U0-G1

Type V Short

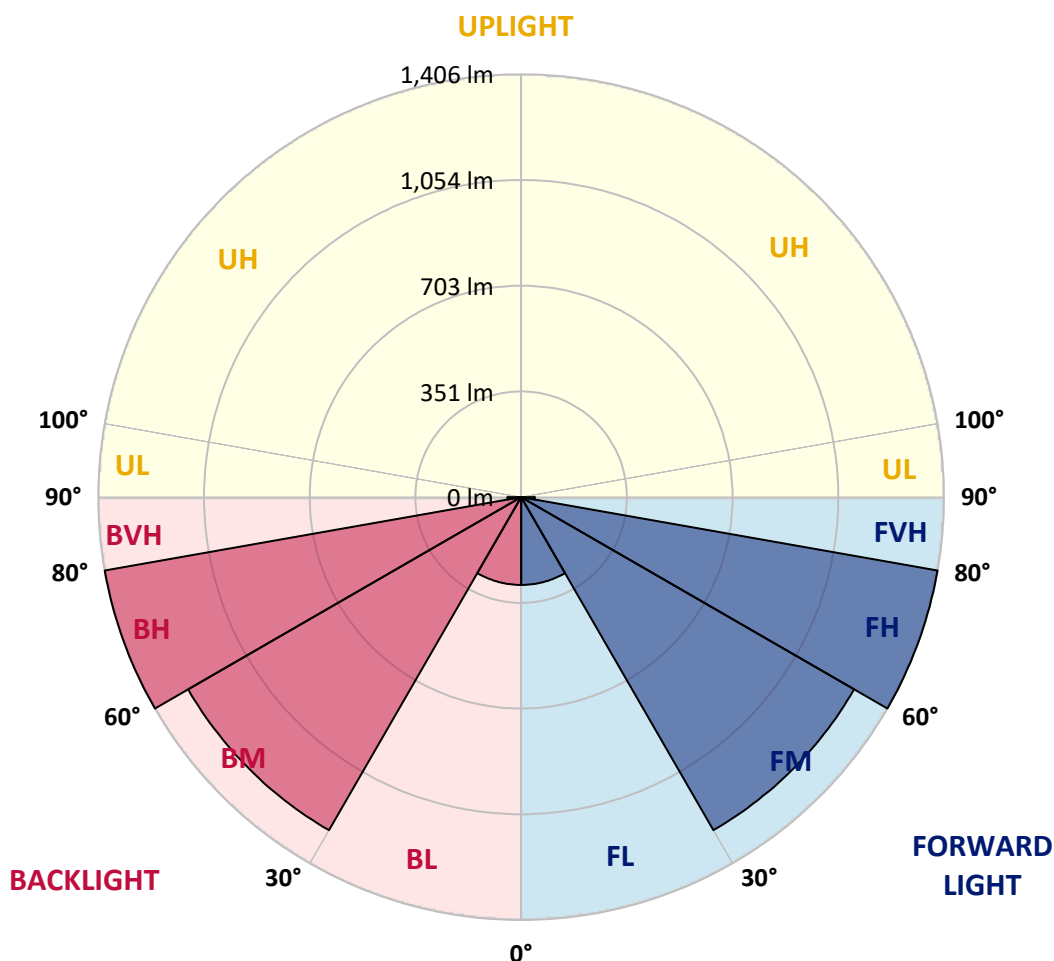



REPORT NUMBER: P867758
 CATALOG NUMBER: MEM2-HTN-SA-60-730-U-T5R

CANDELA DISTRIBUTION (FULL):

| | 0° | 5° | 15° | 25° | 35° | 45° | 55° | 65° | 75° | 85° | 90° |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 569.2 | 569.2 | 569.2 | 569.2 | 569.2 | 569.2 | 569.2 | 569.2 | 569.2 | 569.2 | 569.2 |
| 2.5° | 572.8 | 571.6 | 570.4 | 570.4 | 569.2 | 570.4 | 569.2 | 570.4 | 569.2 | 569.2 | 569.2 |
| 5° | 576.3 | 575.1 | 575.1 | 575.1 | 573.9 | 573.9 | 573.9 | 573.9 | 572.8 | 571.6 | 572.8 |
| 7.5° | 579.8 | 579.8 | 578.6 | 581.0 | 579.8 | 581.0 | 581.0 | 582.2 | 579.8 | 578.6 | 579.8 |
| 10° | 589.2 | 589.2 | 589.2 | 591.6 | 591.6 | 595.1 | 595.1 | 596.3 | 595.1 | 592.8 | 592.8 |
| 12.5° | 609.2 | 608.0 | 608.0 | 608.0 | 610.4 | 612.7 | 615.1 | 615.1 | 613.9 | 610.4 | 610.4 |
| 15° | 631.6 | 633.9 | 631.6 | 630.4 | 631.6 | 633.9 | 636.3 | 636.3 | 635.1 | 633.9 | 633.9 |
| 17.5° | 658.6 | 659.8 | 657.4 | 655.1 | 655.1 | 658.6 | 659.8 | 659.8 | 658.6 | 656.3 | 656.3 |
| 20° | 682.1 | 683.3 | 683.3 | 682.1 | 683.3 | 685.7 | 686.8 | 688.0 | 684.5 | 681.0 | 681.0 |
| 22.5° | 702.1 | 703.3 | 705.7 | 710.4 | 715.1 | 717.4 | 716.2 | 716.2 | 710.4 | 706.8 | 705.7 |
| 25° | 726.8 | 730.4 | 735.1 | 740.9 | 749.2 | 755.1 | 752.7 | 748.0 | 743.3 | 736.2 | 735.1 |
| 27.5° | 775.0 | 775.0 | 770.3 | 772.7 | 782.1 | 788.0 | 785.6 | 782.1 | 772.7 | 768.0 | 766.8 |
| 30° | 812.7 | 812.7 | 812.7 | 810.3 | 816.2 | 823.3 | 820.9 | 815.0 | 810.3 | 808.0 | 808.0 |
| 32.5° | 849.1 | 846.8 | 850.3 | 855.0 | 857.4 | 859.7 | 859.7 | 855.0 | 846.8 | 843.3 | 843.3 |
| 35° | 883.2 | 885.6 | 889.1 | 896.2 | 902.1 | 898.5 | 892.7 | 889.1 | 880.9 | 873.8 | 873.8 |
| 37.5° | 916.2 | 918.5 | 922.1 | 932.6 | 942.1 | 940.9 | 933.8 | 924.4 | 913.8 | 907.9 | 904.4 |
| 40° | 939.7 | 940.9 | 950.3 | 966.8 | 979.7 | 984.4 | 978.5 | 965.6 | 949.1 | 937.4 | 938.5 |
| 42.5° | 967.9 | 970.3 | 985.6 | 1009.1 | 1027.9 | 1035.0 | 1026.7 | 1009.1 | 985.6 | 970.3 | 970.3 |
| 45° | 1009.1 | 1010.3 | 1030.3 | 1059.7 | 1084.4 | 1096.1 | 1084.4 | 1059.7 | 1029.1 | 1013.8 | 1012.6 |
| 47.5° | 1050.3 | 1053.8 | 1076.1 | 1111.4 | 1147.9 | 1162.0 | 1149.0 | 1117.3 | 1080.8 | 1062.0 | 1059.7 |
| 50° | 1097.3 | 1099.7 | 1126.7 | 1174.9 | 1216.1 | 1234.9 | 1218.4 | 1178.5 | 1138.5 | 1114.9 | 1116.1 |
| 52.5° | 1143.2 | 1150.2 | 1186.7 | 1237.3 | 1286.7 | 1307.8 | 1284.3 | 1240.8 | 1198.4 | 1176.1 | 1174.9 |
| 55° | 1211.4 | 1219.6 | 1251.4 | 1307.8 | 1359.6 | 1383.1 | 1360.7 | 1312.5 | 1266.7 | 1242.0 | 1237.3 |
| 57.5° | 1297.2 | 1301.9 | 1330.2 | 1387.8 | 1431.3 | 1453.7 | 1440.7 | 1396.0 | 1352.5 | 1321.9 | 1316.1 |
| 60° | 1394.9 | 1399.6 | 1421.9 | 1480.7 | 1516.0 | 1532.5 | 1527.8 | 1501.9 | 1472.5 | 1458.4 | 1454.8 |
| 62.5° | 1533.6 | 1534.8 | 1546.6 | 1580.7 | 1616.0 | 1623.0 | 1611.3 | 1605.4 | 1614.8 | 1599.5 | 1603.0 |
| 65° | 1692.4 | 1692.4 | 1688.9 | 1693.6 | 1720.6 | 1712.4 | 1704.2 | 1730.0 | 1725.3 | 1699.5 | 1694.8 |
| 67.5° | 1723.0 | 1730.0 | 1744.2 | 1754.7 | 1779.4 | 1764.1 | 1774.7 | 1779.4 | 1750.0 | 1726.5 | 1723.0 |
| 70° | 1541.9 | 1550.1 | 1628.9 | 1677.1 | 1752.4 | 1766.5 | 1732.4 | 1714.8 | 1681.8 | 1638.3 | 1626.5 |
| 72.5° | 1051.4 | 1092.6 | 1319.6 | 1474.8 | 1590.1 | 1607.7 | 1588.9 | 1566.6 | 1500.7 | 1466.6 | 1443.1 |
| 75° | 839.7 | 862.1 | 1064.4 | 1217.3 | 1285.5 | 1284.3 | 1209.0 | 1184.3 | 1132.6 | 1127.9 | 1132.6 |
| 77.5° | 512.8 | 517.5 | 716.2 | 836.2 | 844.4 | 839.7 | 809.2 | 790.3 | 797.4 | 762.1 | 768.0 |
| 80° | 156.4 | 170.5 | 270.5 | 408.1 | 438.7 | 424.6 | 418.7 | 425.7 | 432.8 | 443.4 | 459.9 |
| 82.5° | 31.8 | 40.0 | 54.1 | 117.6 | 134.1 | 132.9 | 131.7 | 145.8 | 158.8 | 164.7 | 199.9 |
| 85° | 3.5 | 3.5 | 4.7 | 9.4 | 20.0 | 31.8 | 32.9 | 29.4 | 44.7 | 43.5 | 30.6 |
| 87.5° | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Streetworks

Report Number: SP1-2407-157-4

Test Date: 08/07/2024

Luminaire Tested: MEM2-HTN-SA-40-730-U-5WQ-2

Data in this report applies to families of products including MEM2-HTN-SA-40-730-U-5WQ-2

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2407-157-4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/20/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Streetworks
 Catalog Number: **MEM2-HTN-SA-40-730-U-5WQ-2**
 Description: Epic Modern Light Square 40W 5WQ Optic and Flare Trim

Spectral Parameters

CCT (K): 3057
 CIE u': 0.2487
 CIE v': 0.5199
 Duv: -0.0002
 CIE x: 0.4326
 CIE y: 0.4020
 CIE z: 0.1654
 Peak Wavelength (nm): 593
 Dominant Wavelength (nm): 582
 Purity: 50.50735
 Rf: 74.6
 Rg: 94

| | | | |
|-----------|------|------|-------|
| CRI (Ra): | 71.7 | | |
| R1: | 68.1 | R9: | -34.8 |
| R2: | 82.0 | R10: | 58.5 |
| R3: | 93.5 | R11: | 62.5 |
| R4: | 67.5 | R12: | 47.5 |
| R5: | 67.2 | R13: | 70.7 |
| R6: | 74.9 | R14: | 96.4 |
| R7: | 77.4 | R15: | 60.0 |
| R8: | 43.1 | | |



Test Conditions

Stabilization Time: 21M
 Operation Time: 1H 21M
 Sphere Temperature (°C): 24.2

REPORT NUMBER: SP1-2407-157-4


| Measurement and Test Equipment | | | |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2407-157-4

CIE 1931 Chromaticity Diagram




CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

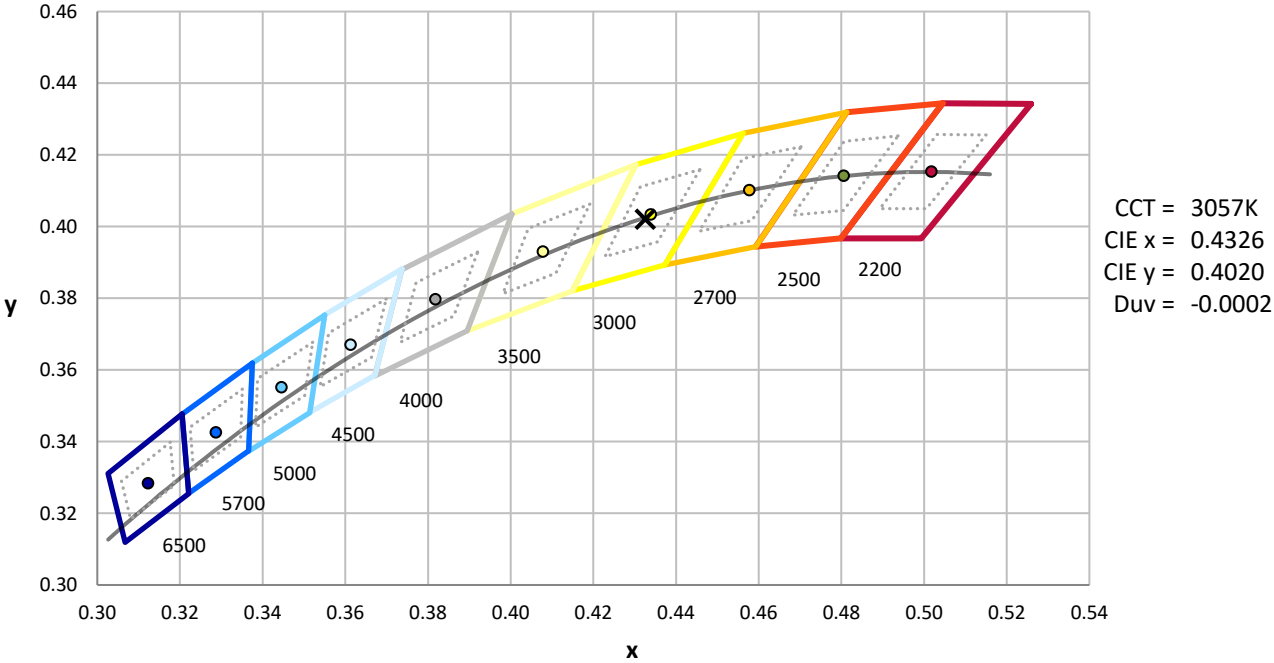

Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2407-157-4

Photopic Flux vs. Wavelength

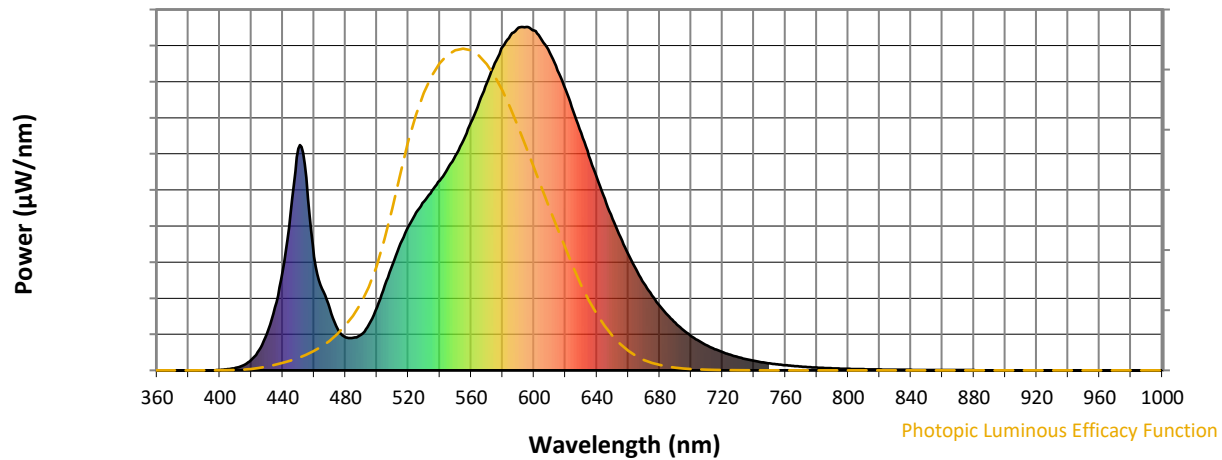

Photopic Lumens: NR

| λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) |
|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|
| 360 | 0 | NR | 490 | 104 | NR | 620 | 818 | NR | 750 | 20 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 135 | NR | 625 | 755 | NR | 755 | 17 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 184 | NR | 630 | 691 | NR | 760 | 15 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 247 | NR | 635 | 625 | NR | 765 | 13 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 309 | NR | 640 | 561 | NR | 770 | 11 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 369 | NR | 645 | 499 | NR | 775 | 9 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 419 | NR | 650 | 441 | NR | 780 | 8 | NR | 910 | 0 | NR |
| 395 | 0 | NR | 525 | 460 | NR | 655 | 388 | NR | 785 | 7 | NR | 915 | 0 | NR |
| 400 | 1 | NR | 530 | 492 | NR | 660 | 338 | NR | 790 | 6 | NR | 920 | 0 | NR |
| 405 | 3 | NR | 535 | 524 | NR | 665 | 294 | NR | 795 | 5 | NR | 925 | 0 | NR |
| 410 | 7 | NR | 540 | 553 | NR | 670 | 253 | NR | 800 | 4 | NR | 930 | 0 | NR |
| 415 | 15 | NR | 545 | 588 | NR | 675 | 218 | NR | 805 | 4 | NR | 935 | 0 | NR |
| 420 | 31 | NR | 550 | 625 | NR | 680 | 188 | NR | 810 | 3 | NR | 940 | 0 | NR |
| 425 | 60 | NR | 555 | 670 | NR | 685 | 161 | NR | 815 | 3 | NR | 945 | 0 | NR |
| 430 | 107 | NR | 560 | 723 | NR | 690 | 139 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 183 | NR | 565 | 780 | NR | 695 | 118 | NR | 825 | 2 | NR | 955 | 0 | NR |
| 440 | 289 | NR | 570 | 837 | NR | 700 | 100 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 460 | NR | 575 | 894 | NR | 705 | 85 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 646 | NR | 580 | 942 | NR | 710 | 73 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 561 | NR | 585 | 976 | NR | 715 | 62 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 331 | NR | 590 | 998 | NR | 720 | 53 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 238 | NR | 595 | 1000 | NR | 725 | 45 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 178 | NR | 600 | 990 | NR | 730 | 39 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 120 | NR | 605 | 962 | NR | 735 | 33 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 96 | NR | 610 | 925 | NR | 740 | 28 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 95 | NR | 615 | 873 | NR | 745 | 24 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-157-4

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.23

| λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) |
|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|
| 360 | 0 | NR | 490 | 104 | NR | 620 | 818 | NR | 750 | 20 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 135 | NR | 625 | 755 | NR | 755 | 17 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 184 | NR | 630 | 691 | NR | 760 | 15 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 247 | NR | 635 | 625 | NR | 765 | 13 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 309 | NR | 640 | 561 | NR | 770 | 11 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 369 | NR | 645 | 499 | NR | 775 | 9 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 419 | NR | 650 | 441 | NR | 780 | 8 | NR | 910 | 0 | NR |
| 395 | 0 | NR | 525 | 460 | NR | 655 | 388 | NR | 785 | 7 | NR | 915 | 0 | NR |
| 400 | 1 | NR | 530 | 492 | NR | 660 | 338 | NR | 790 | 6 | NR | 920 | 0 | NR |
| 405 | 3 | NR | 535 | 524 | NR | 665 | 294 | NR | 795 | 5 | NR | 925 | 0 | NR |
| 410 | 7 | NR | 540 | 553 | NR | 670 | 253 | NR | 800 | 4 | NR | 930 | 0 | NR |
| 415 | 15 | NR | 545 | 588 | NR | 675 | 218 | NR | 805 | 4 | NR | 935 | 0 | NR |
| 420 | 31 | NR | 550 | 625 | NR | 680 | 188 | NR | 810 | 3 | NR | 940 | 0 | NR |
| 425 | 60 | NR | 555 | 670 | NR | 685 | 161 | NR | 815 | 3 | NR | 945 | 0 | NR |
| 430 | 107 | NR | 560 | 723 | NR | 690 | 139 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 183 | NR | 565 | 780 | NR | 695 | 118 | NR | 825 | 2 | NR | 955 | 0 | NR |
| 440 | 289 | NR | 570 | 837 | NR | 700 | 100 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 460 | NR | 575 | 894 | NR | 705 | 85 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 646 | NR | 580 | 942 | NR | 710 | 73 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 561 | NR | 585 | 976 | NR | 715 | 62 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 331 | NR | 590 | 998 | NR | 720 | 53 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 238 | NR | 595 | 1000 | NR | 725 | 45 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 178 | NR | 600 | 990 | NR | 730 | 39 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 120 | NR | 605 | 962 | NR | 735 | 33 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 96 | NR | 610 | 925 | NR | 740 | 28 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 95 | NR | 615 | 873 | NR | 745 | 24 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2407-157-4

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 2.27


| λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360 | 0 | NR | 490 | 104 | NR | 620 | 818 | NR | 750 | 20 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 135 | NR | 625 | 755 | NR | 755 | 17 | NR | 885 | 0 | NR |
| 370 | 0 | NR | 500 | 184 | NR | 630 | 691 | NR | 760 | 15 | NR | 890 | 0 | NR |
| 375 | 0 | NR | 505 | 247 | NR | 635 | 625 | NR | 765 | 13 | NR | 895 | 0 | NR |
| 380 | 0 | NR | 510 | 309 | NR | 640 | 561 | NR | 770 | 11 | NR | 900 | 0 | NR |
| 385 | 0 | NR | 515 | 369 | NR | 645 | 499 | NR | 775 | 9 | NR | 905 | 0 | NR |
| 390 | 0 | NR | 520 | 419 | NR | 650 | 441 | NR | 780 | 8 | NR | 910 | 0 | NR |
| 395 | 0 | NR | 525 | 460 | NR | 655 | 388 | NR | 785 | 7 | NR | 915 | 0 | NR |
| 400 | 1 | NR | 530 | 492 | NR | 660 | 338 | NR | 790 | 6 | NR | 920 | 0 | NR |
| 405 | 3 | NR | 535 | 524 | NR | 665 | 294 | NR | 795 | 5 | NR | 925 | 0 | NR |
| 410 | 7 | NR | 540 | 553 | NR | 670 | 253 | NR | 800 | 4 | NR | 930 | 0 | NR |
| 415 | 15 | NR | 545 | 588 | NR | 675 | 218 | NR | 805 | 4 | NR | 935 | 0 | NR |
| 420 | 31 | NR | 550 | 625 | NR | 680 | 188 | NR | 810 | 3 | NR | 940 | 0 | NR |
| 425 | 60 | NR | 555 | 670 | NR | 685 | 161 | NR | 815 | 3 | NR | 945 | 0 | NR |
| 430 | 107 | NR | 560 | 723 | NR | 690 | 139 | NR | 820 | 3 | NR | 950 | 0 | NR |
| 435 | 183 | NR | 565 | 780 | NR | 695 | 118 | NR | 825 | 2 | NR | 955 | 0 | NR |
| 440 | 289 | NR | 570 | 837 | NR | 700 | 100 | NR | 830 | 2 | NR | 960 | 0 | NR |
| 445 | 460 | NR | 575 | 894 | NR | 705 | 85 | NR | 835 | 2 | NR | 965 | 0 | NR |
| 450 | 646 | NR | 580 | 942 | NR | 710 | 73 | NR | 840 | 1 | NR | 970 | 0 | NR |
| 455 | 561 | NR | 585 | 976 | NR | 715 | 62 | NR | 845 | 1 | NR | 975 | 0 | NR |
| 460 | 331 | NR | 590 | 998 | NR | 720 | 53 | NR | 850 | 1 | NR | 980 | 0 | NR |
| 465 | 238 | NR | 595 | 1000 | NR | 725 | 45 | NR | 855 | 1 | NR | 985 | 0 | NR |
| 470 | 178 | NR | 600 | 990 | NR | 730 | 39 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 120 | NR | 605 | 962 | NR | 735 | 33 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 96 | NR | 610 | 925 | NR | 740 | 28 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 95 | NR | 615 | 873 | NR | 745 | 24 | NR | 875 | 1 | NR | | | |

Summary

$R_f = 74.6$
 $R_g = 94$
 $CIE R_a = 71.7$
 $R_g = -34.8$




Color Vector Graphics

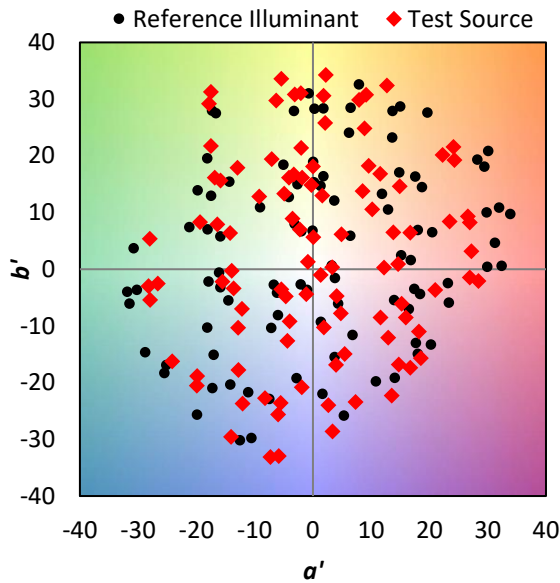


Individual Sample Fidelity Index ($R_{f,i}$)

| | | | |
|------------|------------|------------|------------|
| CES01 = 86 | CES26 = 65 | CES51 = 87 | CES76 = 58 |
| CES02 = 62 | CES27 = 89 | CES52 = 85 | CES77 = 76 |
| CES03 = 31 | CES28 = 84 | CES53 = 77 | CES78 = 61 |
| CES04 = 71 | CES29 = 68 | CES54 = 85 | CES79 = 86 |
| CES05 = 49 | CES30 = 83 | CES55 = 84 | CES80 = 83 |
| CES06 = 51 | CES31 = 71 | CES56 = 74 | CES81 = 73 |
| CES07 = 41 | CES32 = 64 | CES57 = 74 | CES82 = 93 |
| CES08 = 40 | CES33 = 78 | CES58 = 75 | CES83 = 91 |
| CES09 = 29 | CES34 = 75 | CES59 = 85 | CES84 = 88 |
| CES10 = 76 | CES35 = 87 | CES60 = 90 | CES85 = 75 |
| CES11 = 59 | CES36 = 92 | CES61 = 81 | CES86 = 64 |
| CES12 = 65 | CES37 = 84 | CES62 = 89 | CES87 = 77 |
| CES13 = 43 | CES38 = 92 | CES63 = 75 | CES88 = 80 |
| CES14 = 74 | CES39 = 96 | CES64 = 65 | CES89 = 67 |
| CES15 = 71 | CES40 = 92 | CES65 = 64 | CES90 = 80 |
| CES16 = 47 | CES41 = 93 | CES66 = 60 | CES91 = 78 |
| CES17 = 50 | CES42 = 86 | CES67 = 58 | CES92 = 56 |
| CES18 = 56 | CES43 = 77 | CES68 = 66 | CES93 = 73 |
| CES19 = 73 | CES44 = 99 | CES69 = 75 | CES94 = 49 |
| CES20 = 66 | CES45 = 85 | CES70 = 60 | CES95 = 66 |
| CES21 = 87 | CES46 = 81 | CES71 = 56 | CES96 = 76 |
| CES22 = 79 | CES47 = 86 | CES72 = 85 | CES97 = 82 |
| CES23 = 92 | CES48 = 75 | CES73 = 52 | CES98 = 76 |
| CES24 = 91 | CES49 = 79 | CES74 = 95 | CES99 = 64 |
| CES25 = 73 | CES50 = 86 | CES75 = 60 | |

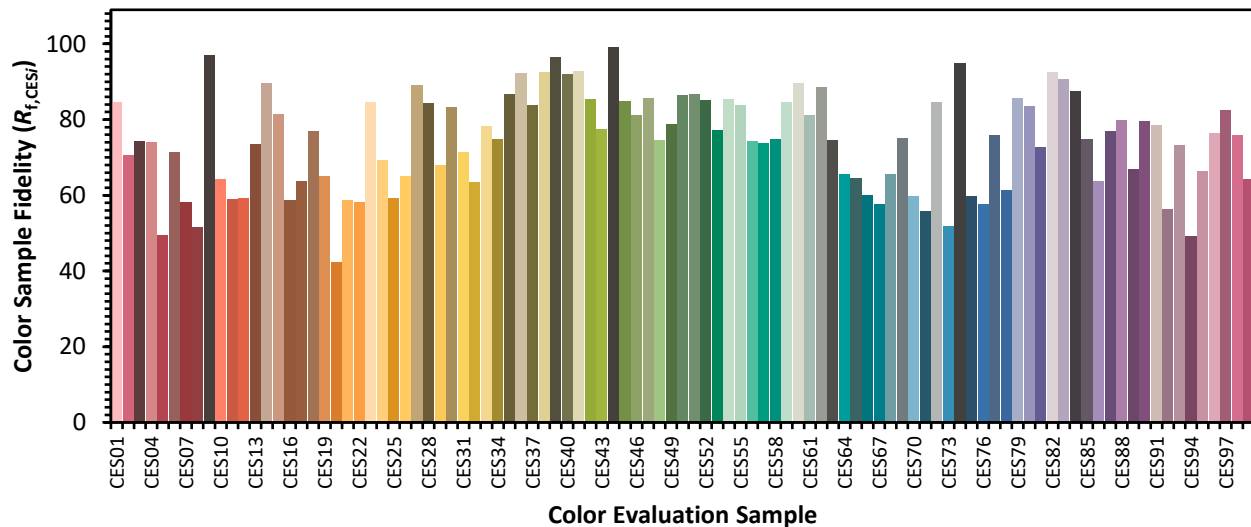

Color Rendition by Hue-Angle Bin

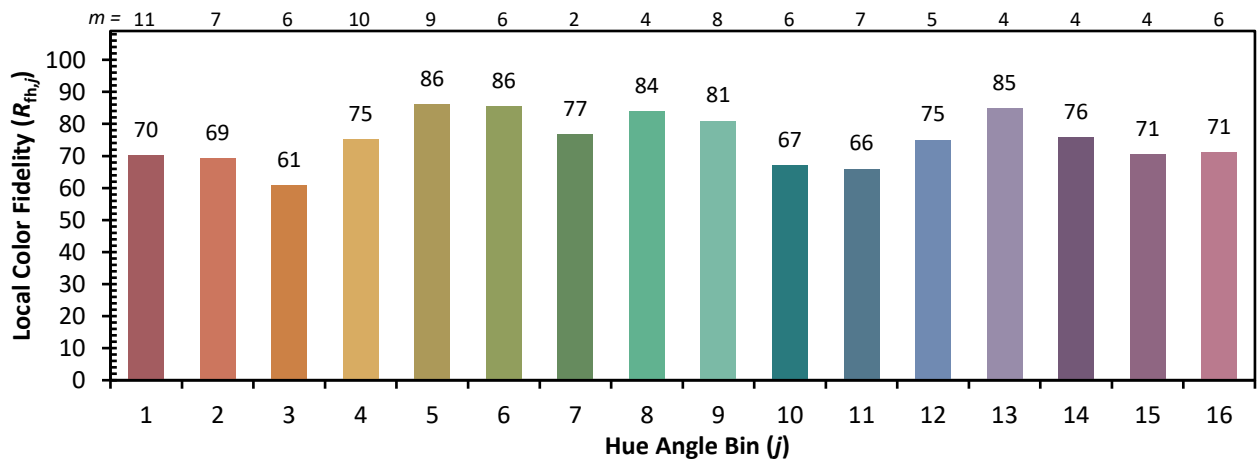

Measure Comparisons



(END OF REPORT)