

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: STREETWORKS

Report Number: P525876

Luminaire Tested: **IFLD-S-SA6B-930-U-22**

Issue Date: 05/27/2021



**Test Information**

Test Method: LM-79-08  
Report Number: P525876  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 05/27/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: STREETWORKS  
Catalog Number: IFLD-S-SA6B-930-U-22  
Description: Infrastructure Flood – Middle Tier Light Square Luminaire w/ 22 distribution lens  
Light Source: (96) 3000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 21827 lumens  
Efficiency: N/A  
Efficacy: 89.1 lumens/watt  
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')  
IES Classification: Type V - Short  
BUG Rating: B5 - U0 - G1

Input Watts (W): 244.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

REPORT NUMBER: P525876  
 CATALOG NUMBER: IFLD-S-SA6B-930-U-22

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

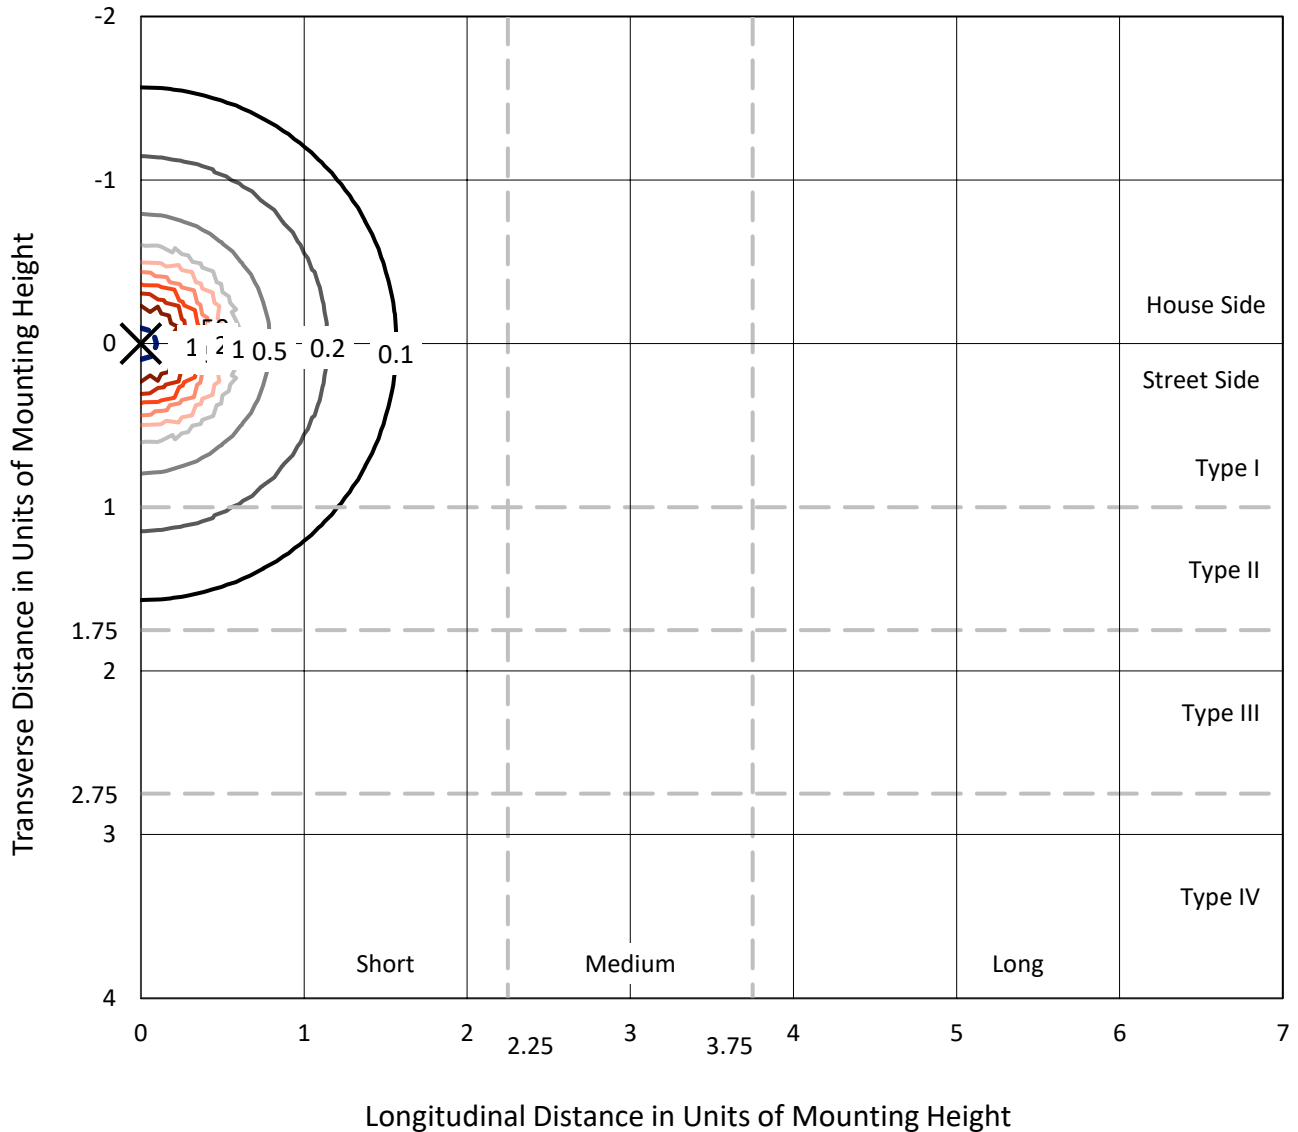

Based on 25 foot mounting height. Maximum calculated value = 518.5 fc  
 Type V - Short - N/A

REPORT NUMBER: P525876  
CATALOG NUMBER: IFLD-S-SA6B-930-U-22

### Luminous Intensity Polar Plot

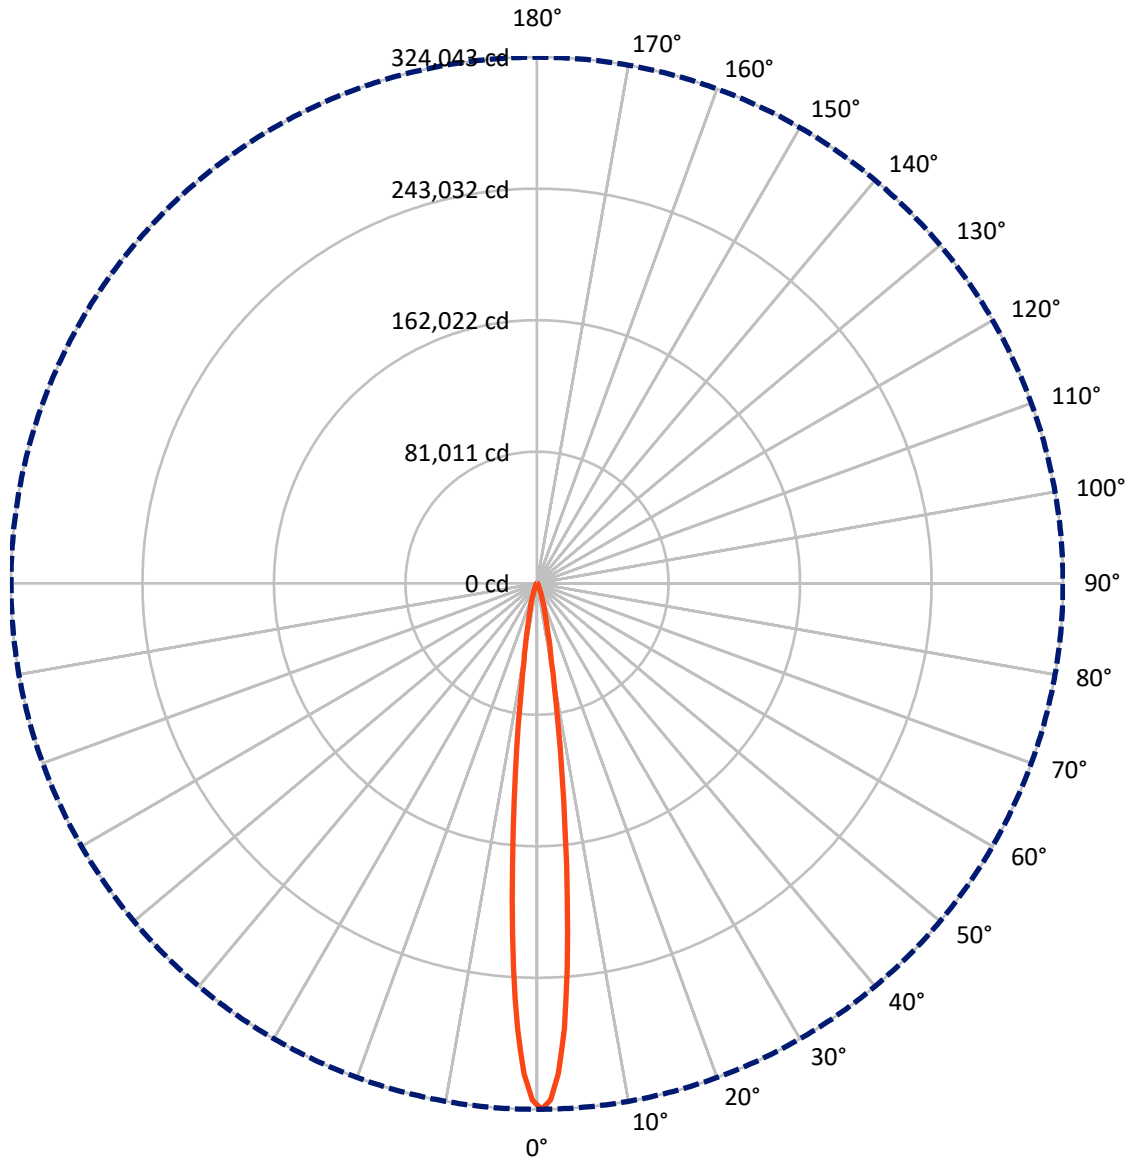

— Vertical Plane Through 0-Deg Lateral      - - - Horizontal Cone Through 0-Deg Vertical

REPORT NUMBER: P525876

CATALOG NUMBER: IFLD-S-SA6B-930-U-22


**FLUX DISTRIBUTION:**

|                    |           | Downward | Upward | Total   |
|--------------------|-----------|----------|--------|---------|
| <b>House Side</b>  | Lumens    | 10913.5  | 0.0    | 10913.5 |
|                    | % Fixture | 50.0     | 0.0    | 50.0    |
| <b>Street Side</b> | Lumens    | 10913.5  | 0.0    | 10913.5 |
|                    | % Fixture | 50.0     | 0.0    | 50.0    |
| <b>Total</b>       | Lumens    | 21827.0  | 0.0    | 21827.0 |
|                    | % Fixture | 100.0    | 0.0    | 100.0   |

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 13392.6 | 61.4      |
| 10°-20°   | 5329.1  | 24.4      |
| 20°-30°   | 1228.8  | 5.6       |
| 30°-40°   | 466.5   | 2.1       |
| 40°-50°   | 380.7   | 1.7       |
| 50°-60°   | 365.6   | 1.7       |
| 60°-70°   | 350.3   | 1.6       |
| 70°-80°   | 231.9   | 1.1       |
| 80°-90°   | 81.5    | 0.4       |
| 90°-100°  | 0.0     | 0.0       |
| 100°-110° | 0.0     | 0.0       |
| 110°-120° | 0.0     | 0.0       |
| 120°-130° | 0.0     | 0.0       |
| 130°-140° | 0.0     | 0.0       |
| 140°-150° | 0.0     | 0.0       |
| 150°-160° | 0.0     | 0.0       |
| 160°-170° | 0.0     | 0.0       |
| 170°-180° | 0.0     | 0.0       |
| 0°-90°    | 21827.0 | 100.0     |
| 0°-180°   | 21827.0 | 100.0     |

**Coefficient of Utilization**

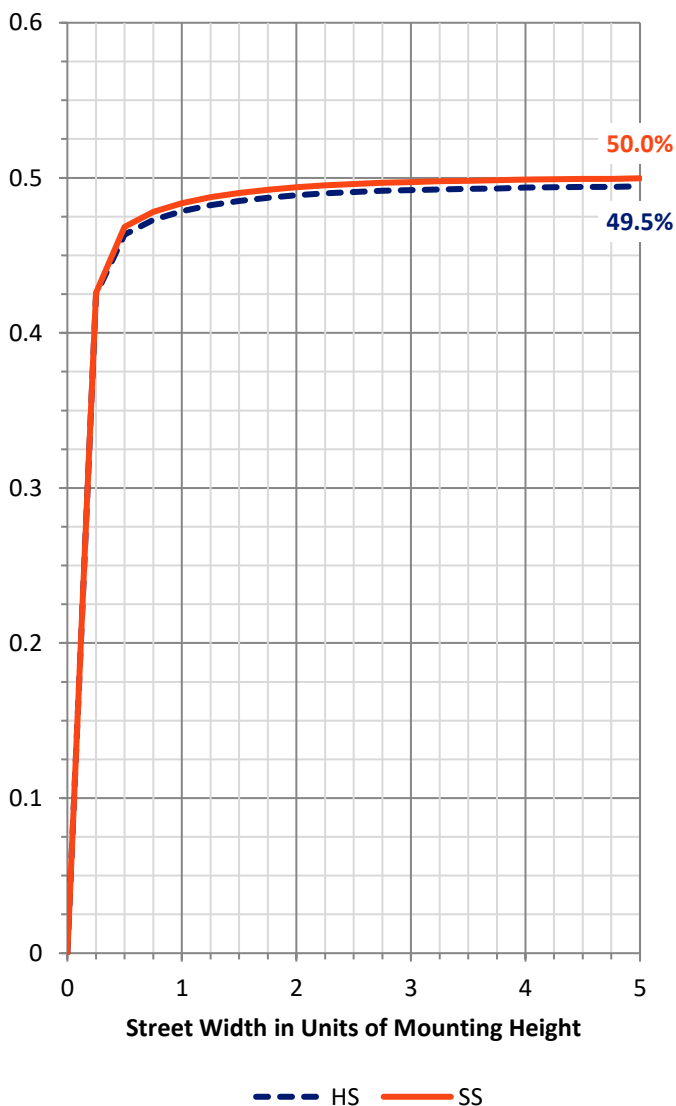

REPORT NUMBER: P525876


CATALOG NUMBER: IFLD-S-SA6B-930-U-22

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

| Zone           | Lumens | % Fixture | Zone Rating/Lumen Limit |      |        |
|----------------|--------|-----------|-------------------------|------|--------|
|                |        |           | B                       | U    | G      |
| FL (0°-30°)    | 9975.2 | 45.7      |                         |      |        |
| FM (30°-60°)   | 606.4  | 2.8       |                         |      |        |
| FH (60°-80°)   | 291.1  | 1.3       |                         |      | G0/660 |
| FVH (80°-90°)  | 40.7   | 0.2       |                         |      | G1/100 |
| BL (0°-30°)    | 9975.2 | 45.7      | B5                      |      |        |
| BM (30°-60°)   | 606.4  | 2.8       | B1/1000                 |      |        |
| BH (60°-80°)   | 291.1  | 1.3       | B1/500                  |      | G0/660 |
| BVH (80°-90°)  | 40.7   | 0.2       |                         |      | G1/100 |
| UL (90°-100°)  | 0.0    | 0.0       |                         | U0/0 |        |
| UH (100°-180°) | 0.0    | 0.0       |                         | U0/0 |        |

**BUG Rating: B5-U0-G1**

Type V Short

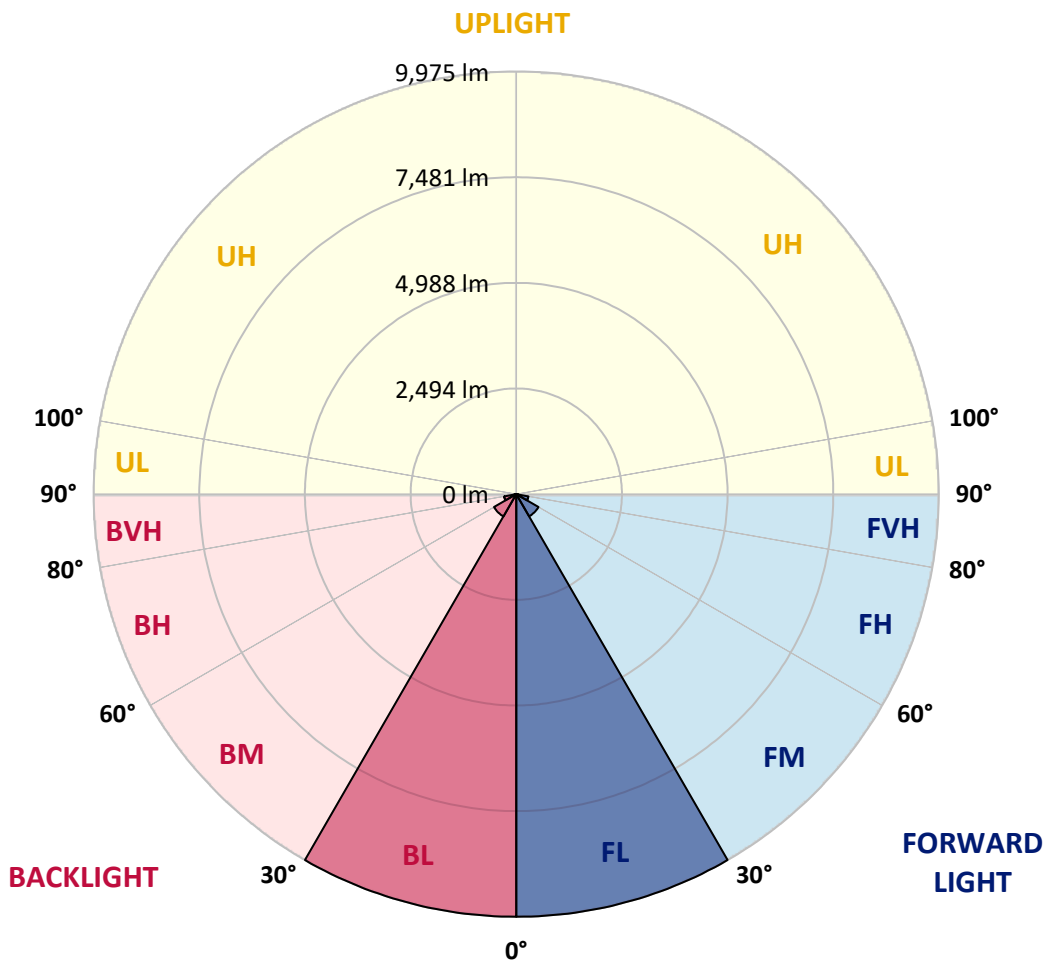



REPORT NUMBER: P525876  
CATALOG NUMBER: IFLD-S-SA6B-930-U-22

**CANDELA DISTRIBUTION (FULL):**

|       | 0°       |
|-------|----------|
| 0°    | 324043.3 |
| 1°    | 318342.9 |
| 2°    | 302375.3 |
| 3°    | 274949.2 |
| 4°    | 237240.0 |
| 5°    | 194720.6 |
| 6°    | 153085.1 |
| 7°    | 117271.7 |
| 8°    | 87527.1  |
| 9°    | 65257.0  |
| 10°   | 48664.9  |
| 12.5° | 26523.0  |
| 15°   | 17018.0  |
| 17.5° | 11484.1  |
| 20°   | 6827.7   |
| 22.5° | 3798.1   |
| 25°   | 2171.3   |
| 27.5° | 1377.1   |
| 30°   | 992.8    |
| 32.5° | 810.2    |
| 35°   | 720.6    |
| 37.5° | 669.3    |
| 40°   | 602.1    |
| 42.5° | 534.8    |
| 45°   | 477.2    |
| 47.5° | 448.3    |
| 50°   | 429.1    |
| 52.5° | 416.3    |
| 55°   | 406.7    |
| 57.5° | 400.3    |
| 60°   | 387.5    |
| 62.5° | 377.9    |
| 65°   | 358.7    |
| 67.5° | 333.1    |
| 70°   | 301.0    |
| 72.5° | 259.4    |
| 75°   | 217.8    |
| 77.5° | 179.3    |
| 80°   | 144.1    |
| 82.5° | 112.1    |
| 85°   | 83.3     |
| 87.5° | 32.0     |
| 90°   | 0.0      |

(END OF REPORT)