

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P525997

Luminaire Tested: **IFLD-M-SA4A-950-U-22**

Issue Date: 05/27/2021



Test Information

Test Method: LM-79-08
Report Number: P525997
Test Lab: INNOVATION CENTER(G2)
Issue Date: 05/27/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: IFLD-M-SA4A-950-U-22
Description: Infrastructure Flood – Middle Tier Light Square Luminaire w/ 22 distribution lens
Light Source: (64) 5000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13634.2 lumens
Efficiency: N/A
Efficacy: 106.0 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G1

Input Watts (W): 128.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

REPORT NUMBER: P525997
 CATALOG NUMBER: IFLD-M-SA4A-950-U-22

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

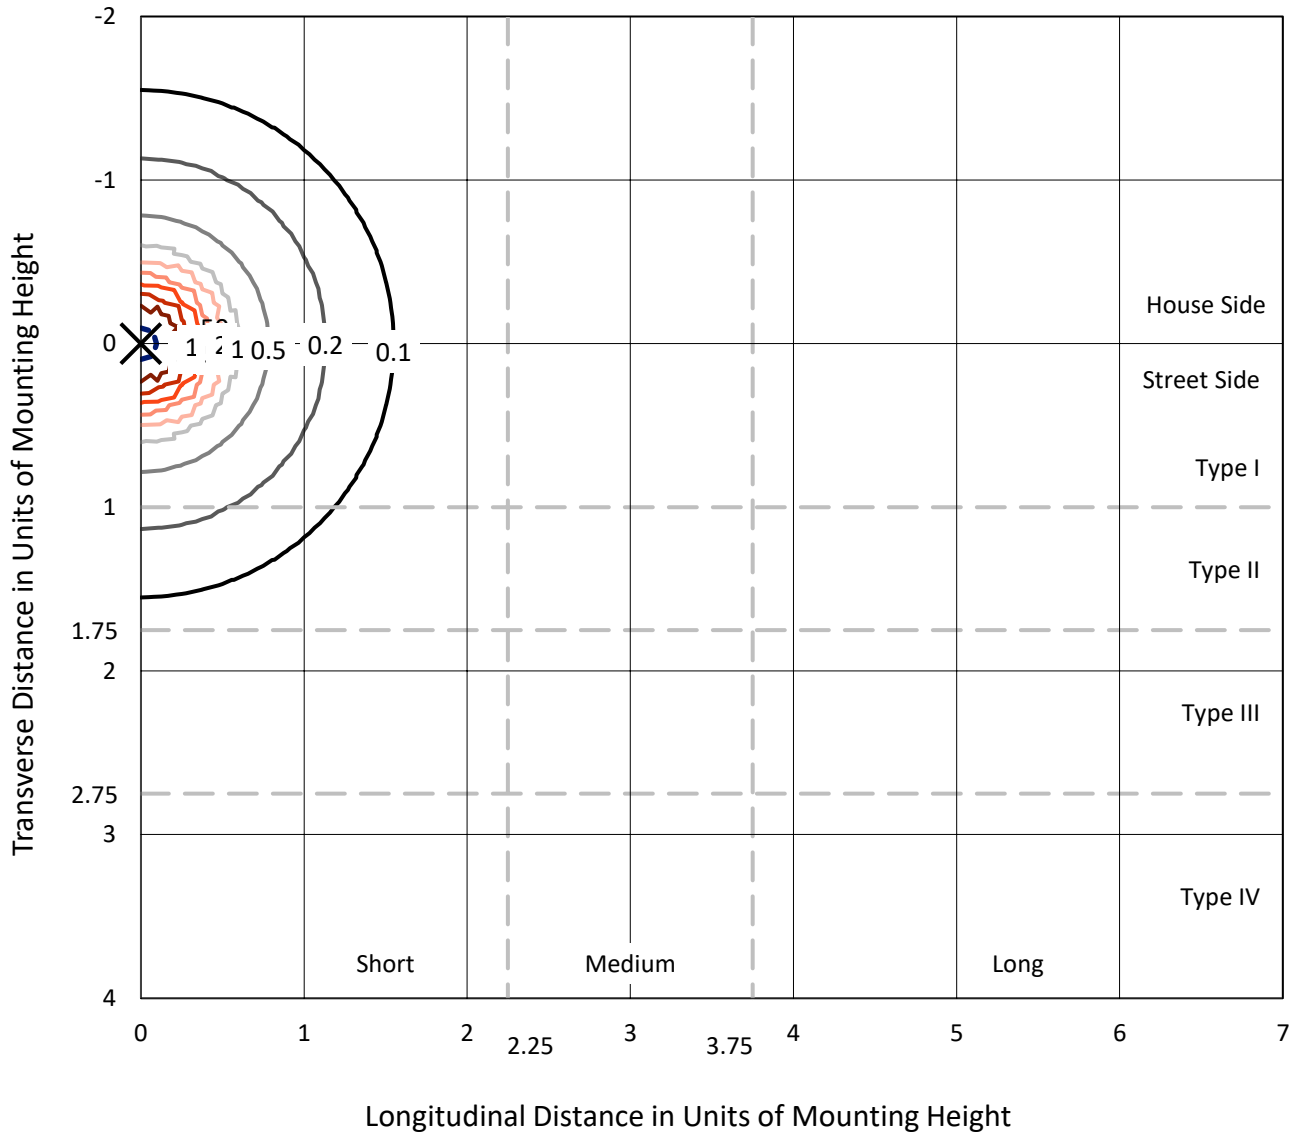

Based on 20 foot mounting height. Maximum calculated value = 506 fc
 Type V - Short - N/A

REPORT NUMBER: P525997
CATALOG NUMBER: IFLD-M-SA4A-950-U-22

Luminous Intensity Polar Plot

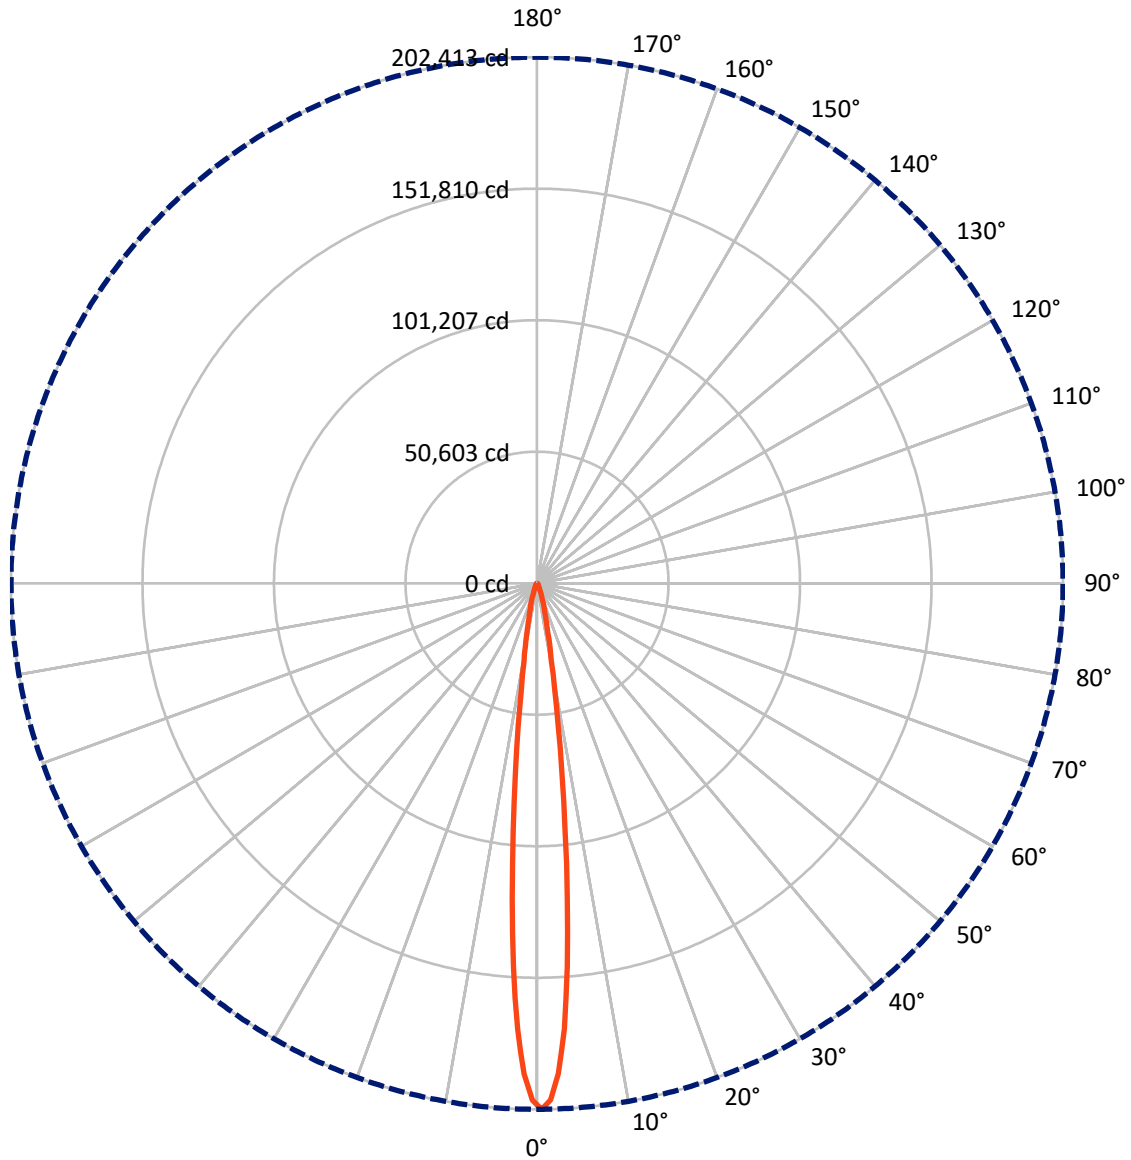

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 0-Deg Vertical

REPORT NUMBER: P525997
 CATALOG NUMBER: IFLD-M-SA4A-950-U-22


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	6817.1	0.0	6817.1
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	6817.1	0.0	6817.1
	% Fixture	50.0	0.0	50.0
Total	Lumens	13634.2	0.0	13634.2
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	8365.7	61.4
10°-20°	3328.8	24.4
20°-30°	767.5	5.6
30°-40°	291.4	2.1
40°-50°	237.8	1.7
50°-60°	228.4	1.7
60°-70°	218.8	1.6
70°-80°	144.8	1.1
80°-90°	50.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	13634.2	100.0
0°-180°	13634.2	100.0

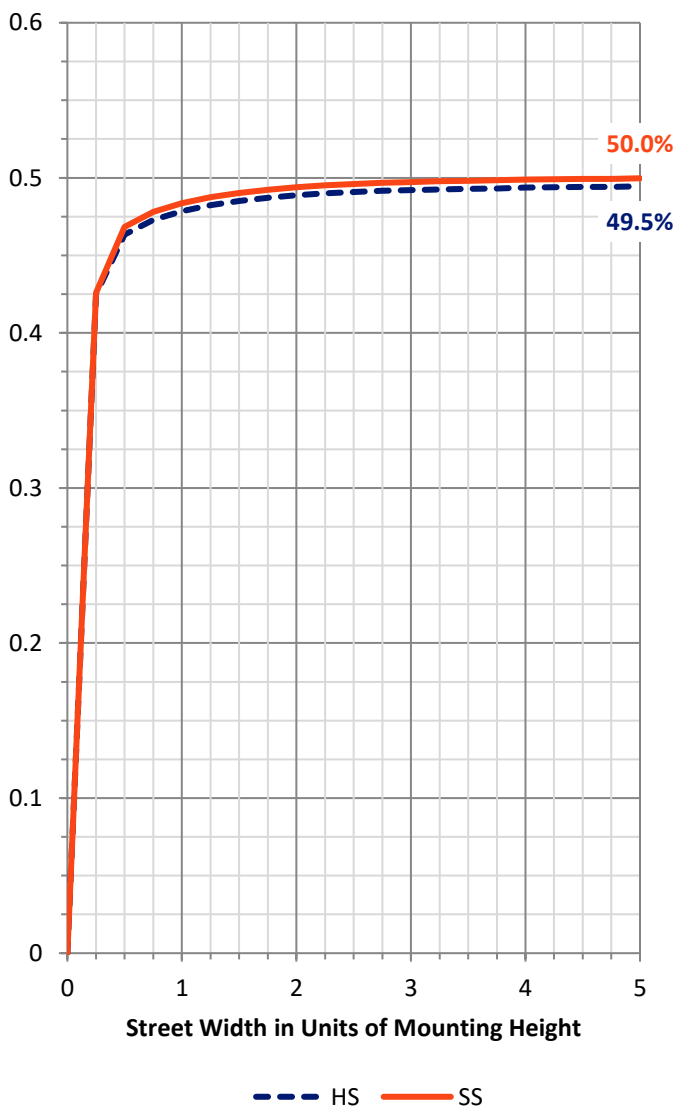


REPORT NUMBER: P525997
 CATALOG NUMBER: IFLD-M-SA4A-950-U-22

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	6231.0	45.7			
FM (30°-60°)	378.8	2.8			
FH (60°-80°)	181.8	1.3			G0/660
FVH (80°-90°)	25.4	0.2			G1/100
BL (0°-30°)	6231.0	45.7	B5		
BM (30°-60°)	378.8	2.8	B1/1000		
BH (60°-80°)	181.8	1.3	B1/500		G0/660
BVH (80°-90°)	25.4	0.2			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G1

Type V Short

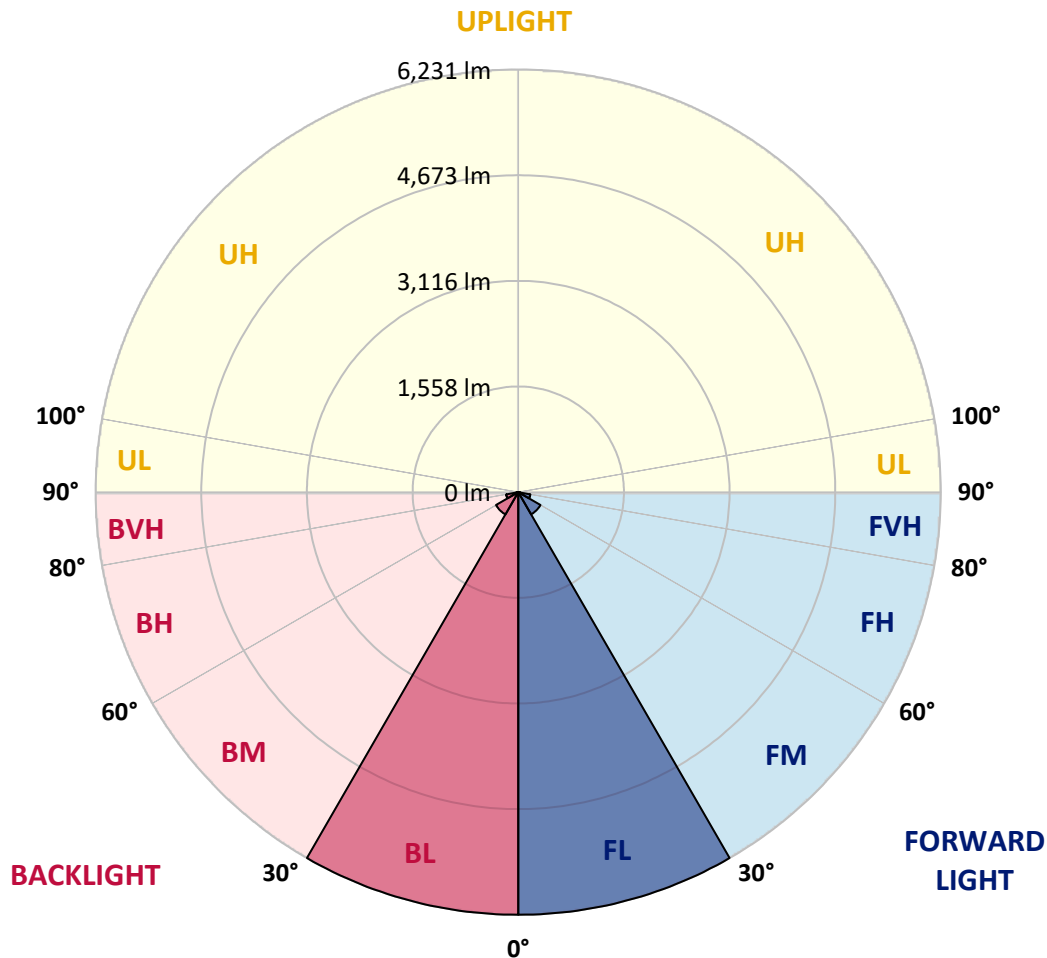



REPORT NUMBER: P525997
CATALOG NUMBER: IFLD-M-SA4A-950-U-22

CANDELA DISTRIBUTION (FULL):

	0°
0°	202413.4
1°	198852.6
2°	188878.5
3°	171746.8
4°	148191.8
5°	121632.1
6°	95624.5
7°	73253.7
8°	54673.7
9°	40762.7
10°	30398.5
12.5°	16567.6
15°	10630.3
17.5°	7173.5
20°	4264.9
22.5°	2372.5
25°	1356.3
27.5°	860.2
30°	620.1
32.5°	506.1
35°	450.1
37.5°	418.1
40°	376.1
42.5°	334.1
45°	298.1
47.5°	280.1
50°	268.1
52.5°	260.1
55°	254.1
57.5°	250.1
60°	242.1
62.5°	236.1
65°	224.0
67.5°	208.0
70°	188.0
72.5°	162.0
75°	136.0
77.5°	112.0
80°	90.0
82.5°	70.0
85°	52.0
87.5°	20.0
90°	0.0

(END OF REPORT)