

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P526000

Luminaire Tested: **IFLD-M-SA4D-950-U-22**

Issue Date: 05/27/2021



Test Information

Test Method: LM-79-08
Report Number: P526000
Test Lab: INNOVATION CENTER(G2)
Issue Date: 05/27/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: IFLD-M-SA4D-950-U-22
Description: Infrastructure Flood – Middle Tier Light Square Luminaire w/ 22 distribution lens
Light Source: (64) 5000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 23096.5 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G1

Input Watts (W): 249.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

REPORT NUMBER: P526000
 CATALOG NUMBER: IFLD-M-SA4D-950-U-22

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

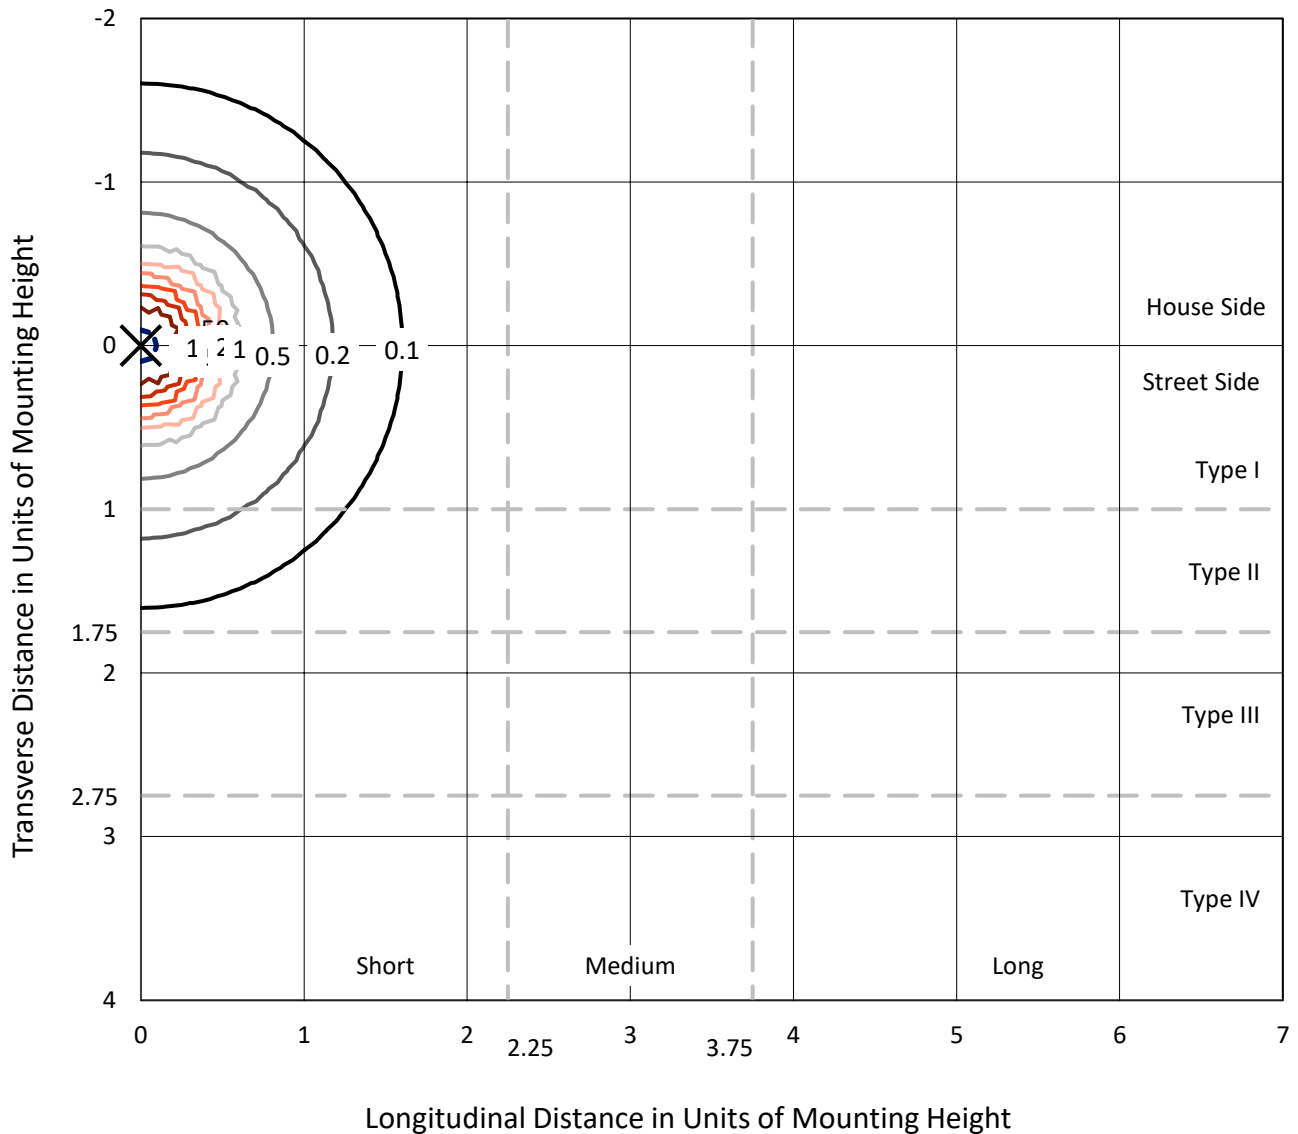

Based on 25 foot mounting height. Maximum calculated value = 548.6 fc
 Type V - Short - N/A

REPORT NUMBER: P526000
CATALOG NUMBER: IFLD-M-SA4D-950-U-22

Luminous Intensity Polar Plot

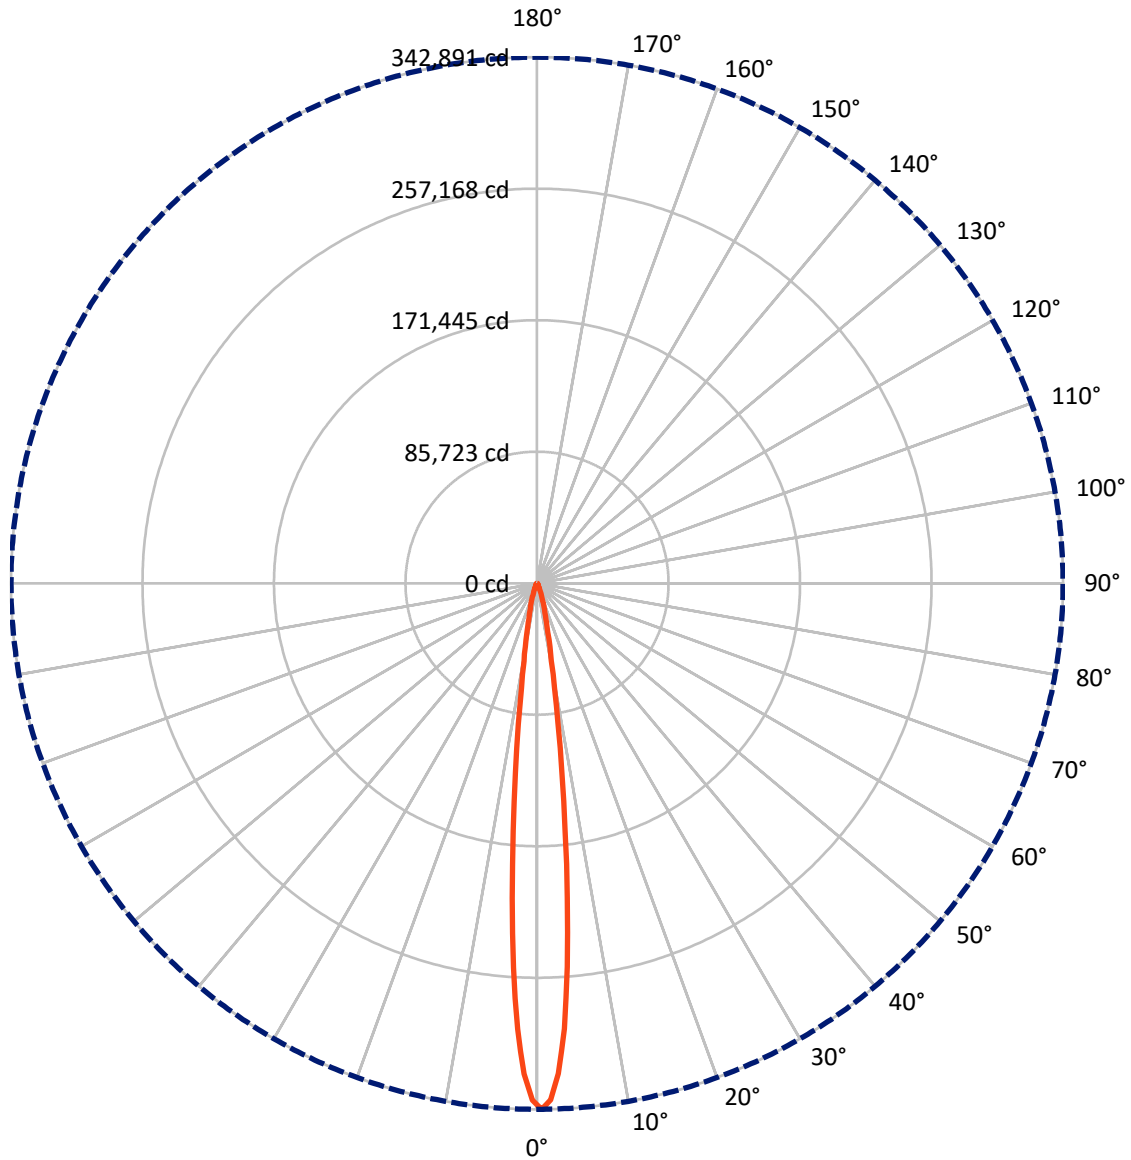

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 0-Deg Vertical

REPORT NUMBER: P526000

CATALOG NUMBER: IFLD-M-SA4D-950-U-22


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	11548.2	0.0	11548.2
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	11548.2	0.0	11548.2
	% Fixture	50.0	0.0	50.0
Total	Lumens	23096.5	0.0	23096.5
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	14171.5	61.4
10°-20°	5639.0	24.4
20°-30°	1300.2	5.6
30°-40°	493.6	2.1
40°-50°	402.9	1.7
50°-60°	386.9	1.7
60°-70°	370.7	1.6
70°-80°	245.4	1.1
80°-90°	86.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	23096.5	100.0
0°-180°	23096.5	100.0

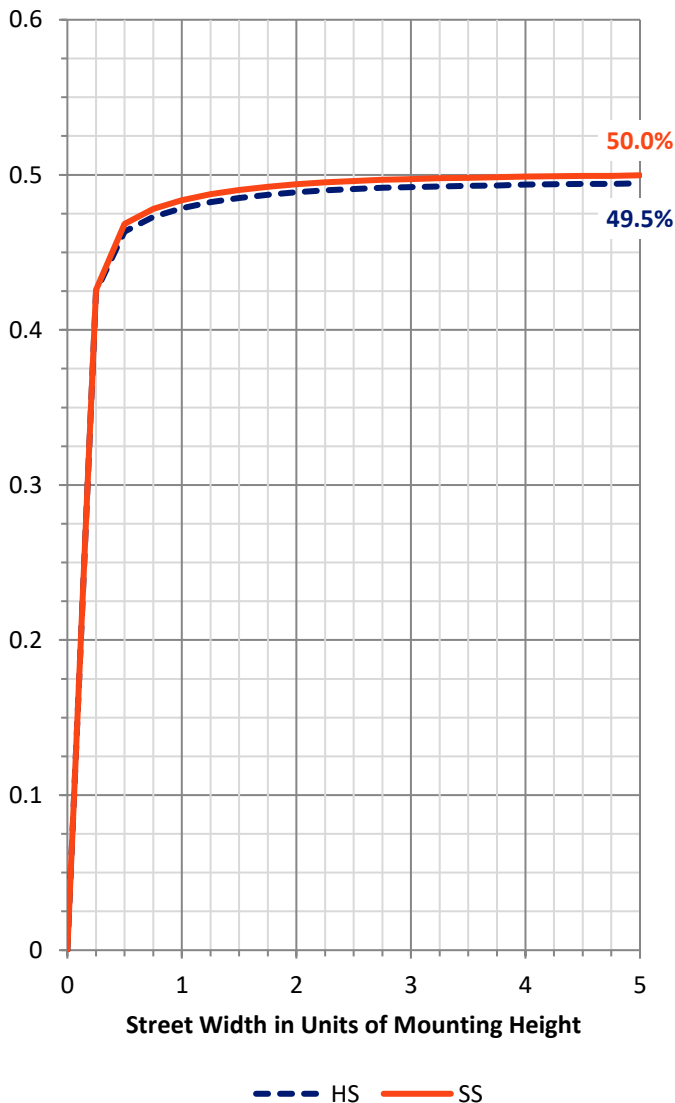


REPORT NUMBER: P526000
 CATALOG NUMBER: IFLD-M-SA4D-950-U-22

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	10555.4	45.7			
FM (30°-60°)	641.7	2.8			
FH (60°-80°)	308.0	1.3			G0/660
FVH (80°-90°)	43.1	0.2			G1/100
BL (0°-30°)	10555.4	45.7	B5		
BM (30°-60°)	641.7	2.8	B1/1000		
BH (60°-80°)	308.0	1.3	B1/500		G0/660
BVH (80°-90°)	43.1	0.2			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G1

Type V Short

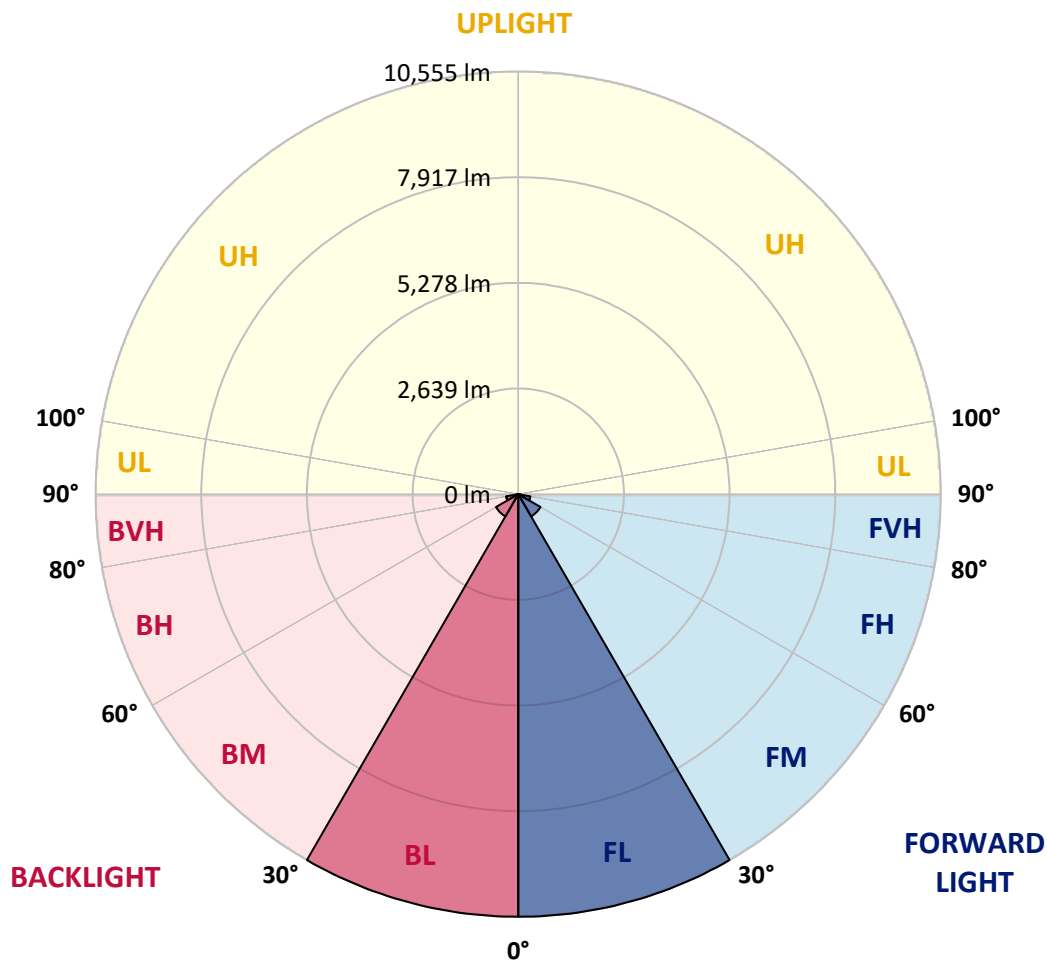



REPORT NUMBER: P526000
CATALOG NUMBER: IFLD-M-SA4D-950-U-22

CANDELA DISTRIBUTION (FULL):

	0°
0°	342890.6
1°	336858.6
2°	319962.3
3°	290941.1
4°	251038.5
5°	206046.1
6°	161989.0
7°	124092.6
8°	92617.9
9°	69052.5
10°	51495.4
12.5°	28065.6
15°	18007.8
17.5°	12152.1
20°	7224.8
22.5°	4019.1
25°	2297.6
27.5°	1457.2
30°	1050.5
32.5°	857.4
35°	762.5
37.5°	708.2
40°	637.1
42.5°	565.9
45°	504.9
47.5°	474.4
50°	454.1
52.5°	440.5
55°	430.4
57.5°	423.6
60°	410.0
62.5°	399.9
65°	379.5
67.5°	352.4
70°	318.5
72.5°	274.5
75°	230.4
77.5°	189.8
80°	152.5
82.5°	118.6
85°	88.1
87.5°	33.9
90°	0.0

(END OF REPORT)