

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P525682

Luminaire Tested: **IFLD-S-SA6C-930-U-33**

Issue Date: 05/27/2021



Test Information

Test Method: LM-79-08
Report Number: P525682
Test Lab: INNOVATION CENTER(G2)
Issue Date: 05/27/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: IFLD-S-SA6C-930-U-33
Description: Infrastructure Flood – Middle Tier Light Square Luminaire w/ 33 distribution lens
Light Source: (96) 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 27070.2 lumens
Efficiency: N/A
Efficacy: 84.2 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G1

Input Watts (W): 321.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

REPORT NUMBER: P525682
 CATALOG NUMBER: IFLD-S-SA6C-930-U-33

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

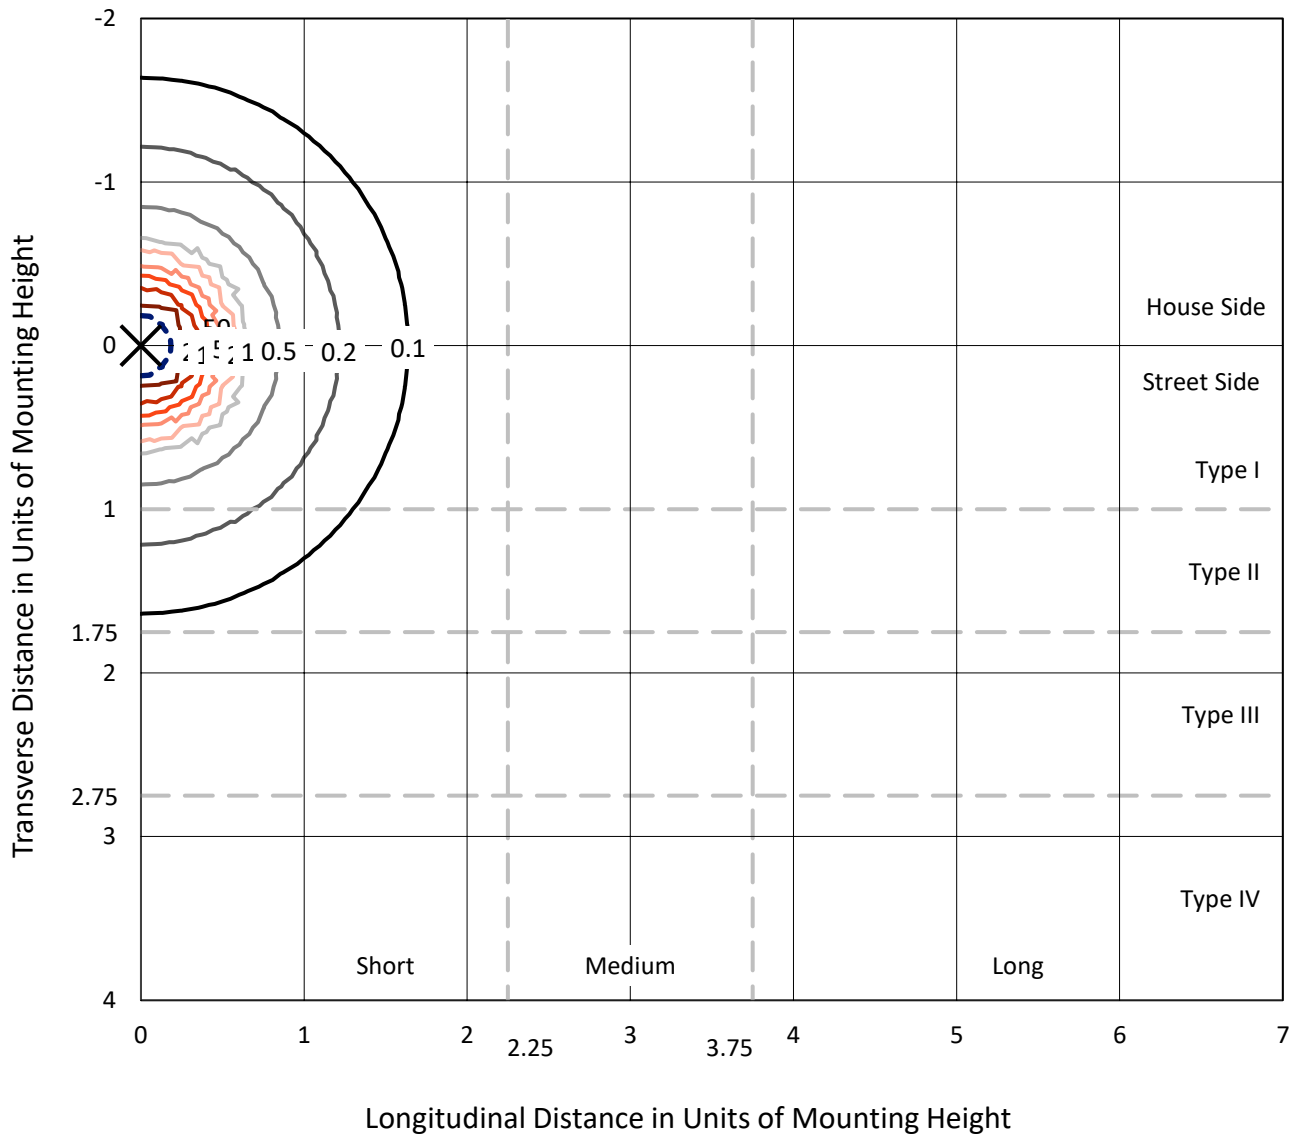

Based on 25 foot mounting height. Maximum calculated value = 291.7 fc
 Type V - Short - N/A

REPORT NUMBER: P525682
CATALOG NUMBER: IFLD-S-SA6C-930-U-33

Luminous Intensity Polar Plot

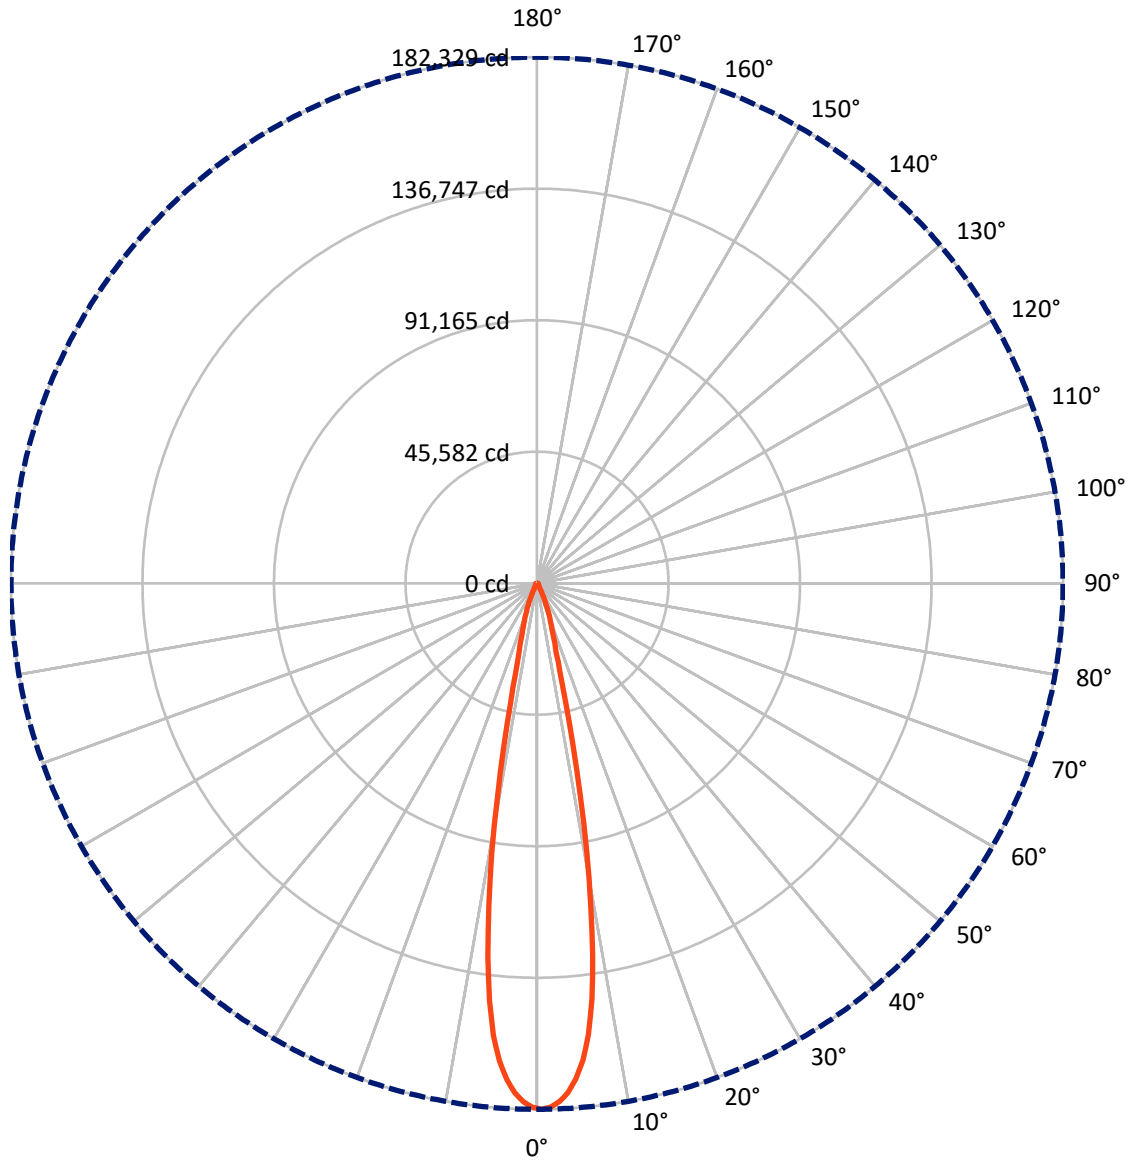

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 0-Deg Vertical

REPORT NUMBER: P525682
 CATALOG NUMBER: IFLD-S-SA6C-930-U-33


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	13535.1	0.0	13535.1
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	13535.1	0.0	13535.1
	% Fixture	50.0	0.0	50.0
Total	Lumens	27070.2	0.0	27070.2
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	13575.4	50.1
10°-20°	8929.5	33.0
20°-30°	2401.8	8.9
30°-40°	596.8	2.2
40°-50°	445.3	1.6
50°-60°	409.5	1.5
60°-70°	375.6	1.4
70°-80°	242.9	0.9
80°-90°	93.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	27070.2	100.0
0°-180°	27070.2	100.0

Coefficient of Utilization

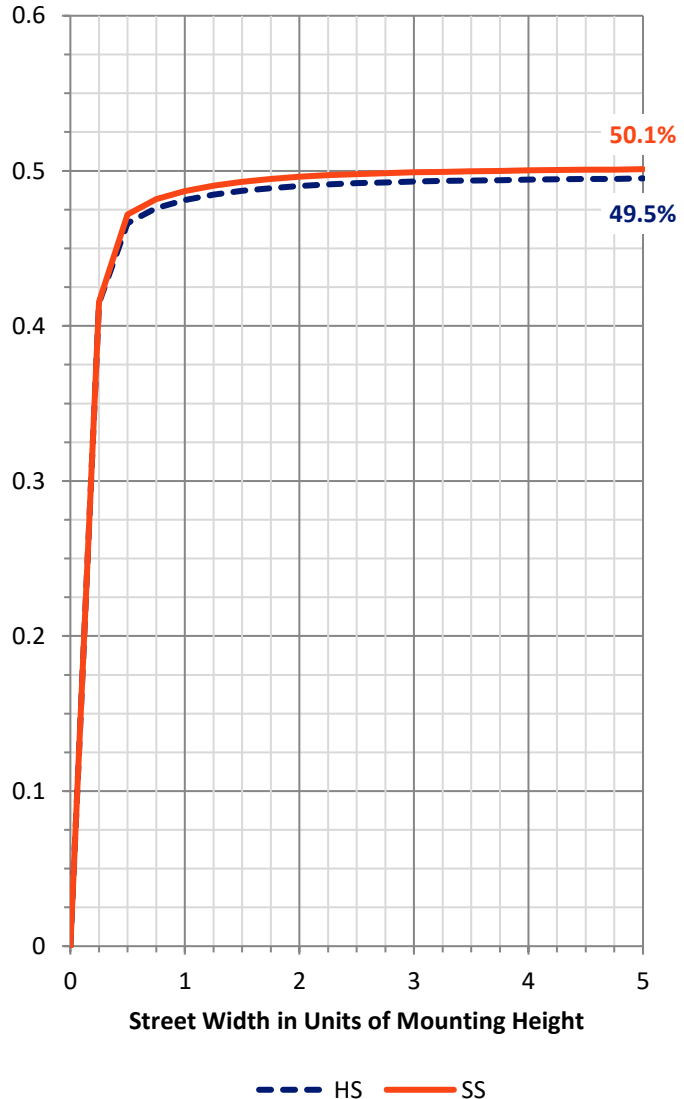


REPORT NUMBER: P525682
 CATALOG NUMBER: IFLD-S-SA6C-930-U-33

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	12453.3	46.0			
FM (30°-60°)	725.8	2.7			
FH (60°-80°)	309.3	1.1			G0/660
FVH (80°-90°)	46.7	0.2			G1/100
BL (0°-30°)	12453.3	46.0	B5		
BM (30°-60°)	725.8	2.7	B1/1000		
BH (60°-80°)	309.3	1.1	B1/500		G0/660
BVH (80°-90°)	46.7	0.2			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G1

Type V Short

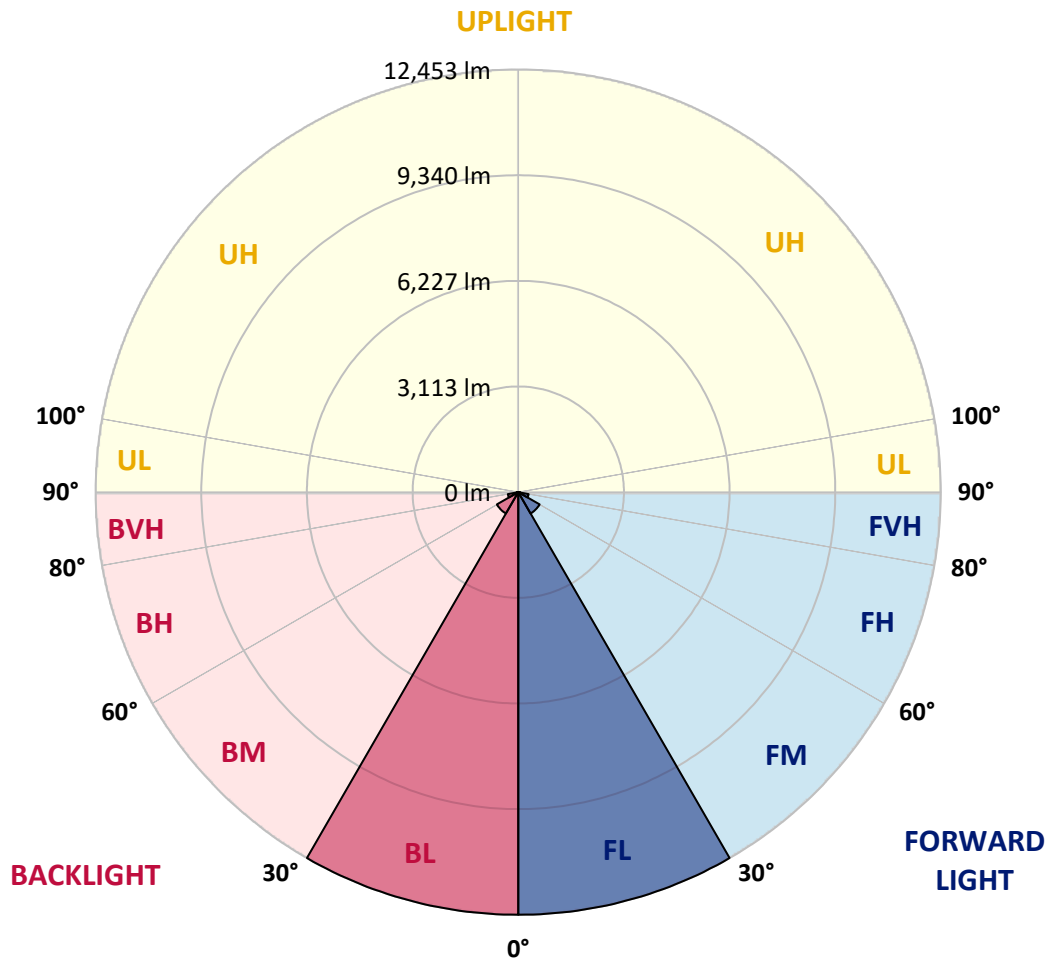

REPORT NUMBER: P525682
CATALOG NUMBER: IFLD-S-SA6C-930-U-33


CANDELA DISTRIBUTION (FULL):

	0°
0°	182329.4
1°	181615.9
2°	179818.1
3°	176756.7
4°	172296.1
5°	166085.6
6°	157415.6
7°	145548.6
8°	130500.7
9°	112754.0
10°	94756.3
11°	75423.2
12°	57477.2
13°	42473.1
14°	31786.1
15°	24893.9
17.5°	16686.3
20°	12062.3
22.5°	7952.5
25°	4667.9
27.5°	2618.9
30°	1462.9
32.5°	1068.3
35°	904.9
37.5°	797.2
40°	701.6
42.5°	629.8
45°	566.0
47.5°	522.2
50°	486.3
52.5°	466.4
55°	454.4
57.5°	446.5
60°	434.5
62.5°	410.6
65°	382.7
67.5°	350.8
70°	310.9
72.5°	267.1
75°	227.2
77.5°	191.3
80°	159.4
82.5°	127.6
85°	95.7
87.5°	39.9



REPORT NUMBER: P525682
CATALOG NUMBER: IFLD-S-SA6C-930-U-33

CANDELA DISTRIBUTION (continued):



(END OF REPORT)