

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: STREETWORKS

Report Number: P386292

Luminaire Tested: GAW-SA1D-830-U-T4W-HSS

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-2019
Report Number: P386292
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1903-205-19)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: STREETWORKS
Catalog Number: GAW-SA1D-830-U-T4W-HSS
Description: GALLEON WALL LUMINAIRE
(1) 80 CRI, 3000K, 1200mA LIGHTSQUARE WITH 16 LEDS AND TYPE IV WIDE OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4773 lumens
Efficiency: N/A
Efficacy: 72.3 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B1 - U0 - G2


Input Watts (W): 66
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P386292
 CATALOG NUMBER: GAW-SA1D-830-U-T4W-HSS

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

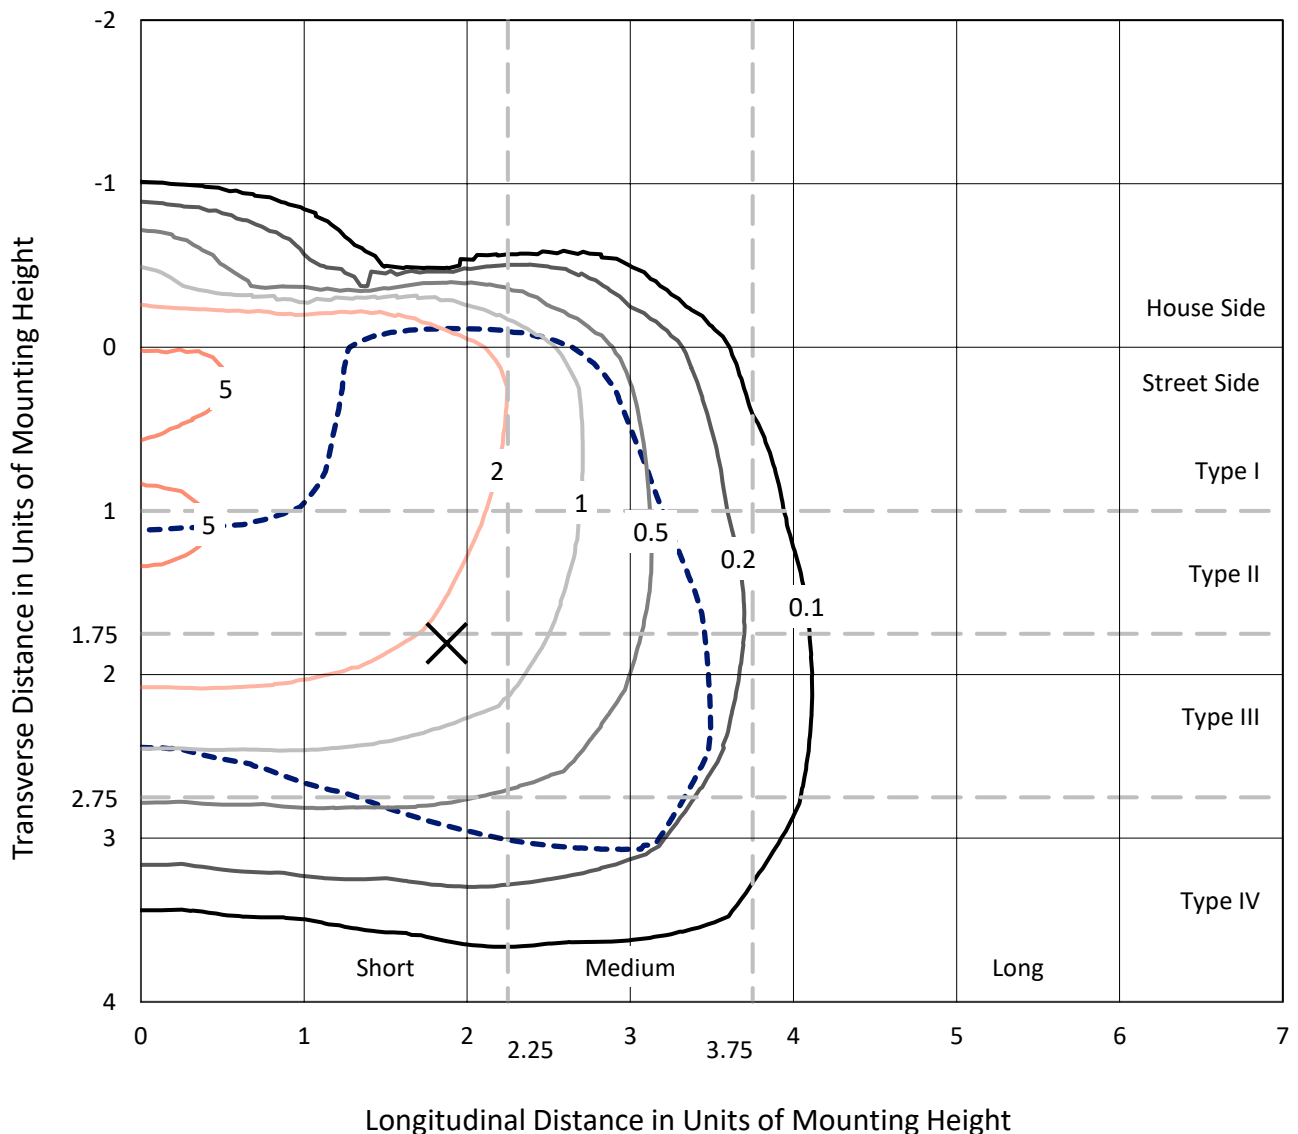

Based on 10 foot mounting height. Maximum calculated value = 7 fc
 Type IV - Short - N/A

REPORT NUMBER: P386292
CATALOG NUMBER: GAW-SA1D-830-U-T4W-HSS

Luminous Intensity Polar Plot

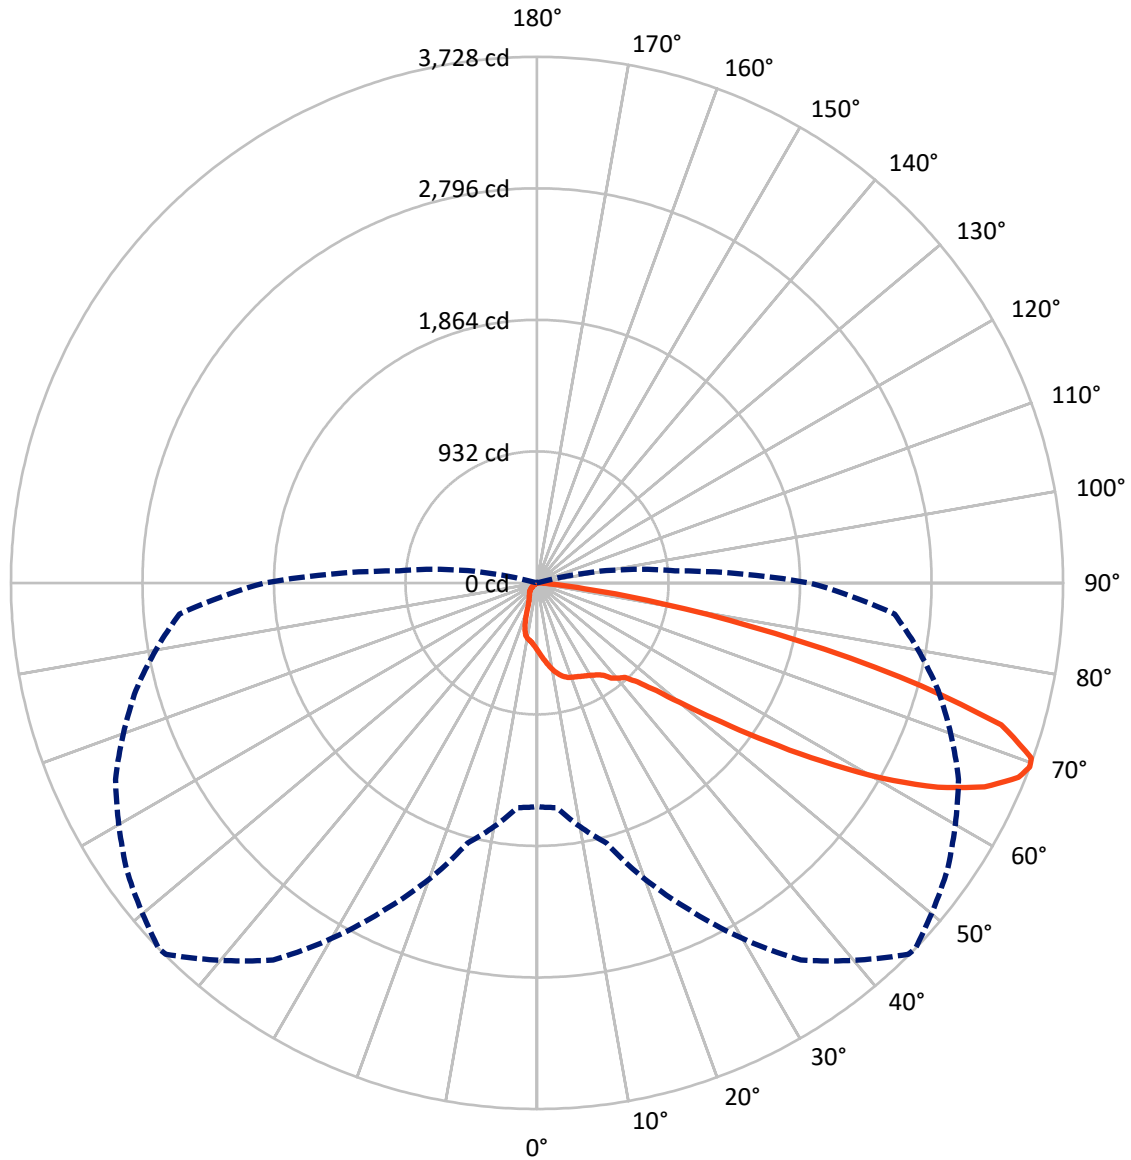

— Vertical Plane Through 46-Deg Lateral - - - Horizontal Cone Through 69-Deg Vertical

REPORT NUMBER: P386292
 CATALOG NUMBER: GAW-SA1D-830-U-T4W-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	489.8	0.0	489.8
	% Fixture	10.3	0.0	10.3
Street Side	Lumens	4283.2	0.0	4283.2
	% Fixture	89.7	0.0	89.7
Total	Lumens	4773.0	0.0	4773.0
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.6	1.0
10°-20°	144.4	3.0
20°-30°	227.1	4.8
30°-40°	325.7	6.8
40°-50°	562.9	11.8
50°-60°	1112.0	23.3
60°-70°	1554.2	32.6
70°-80°	750.8	15.7
80°-90°	48.3	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	4773.0	100.0
0°-180°	4773.0	100.0

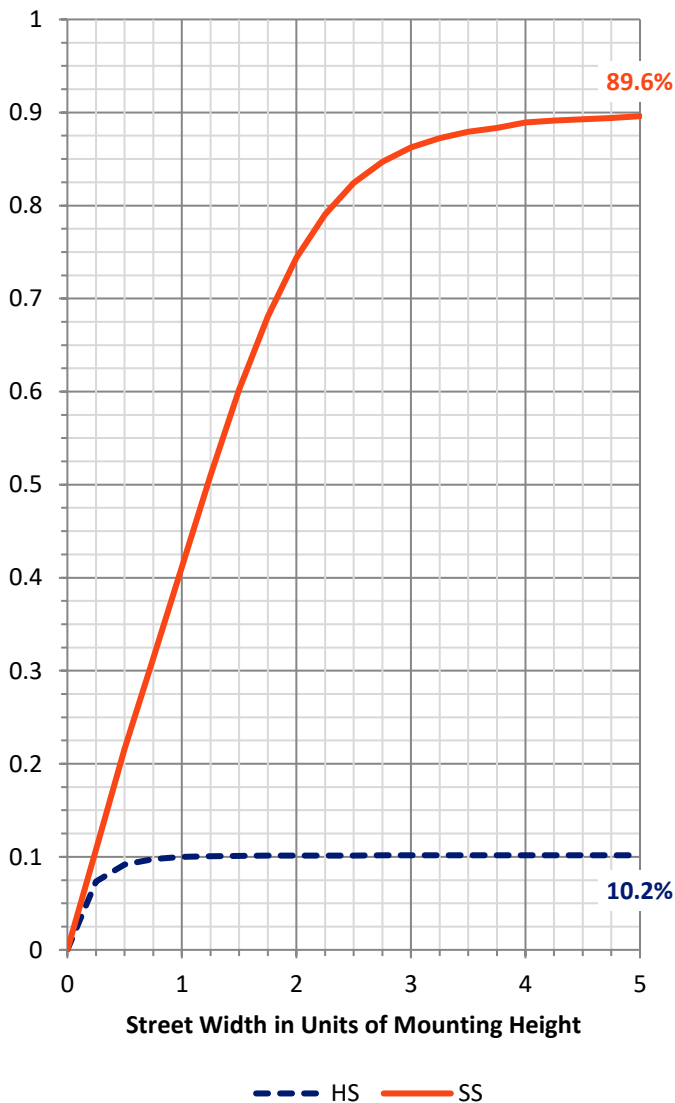


REPORT NUMBER: P386292
 CATALOG NUMBER: GAW-SA1D-830-U-T4W-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	290.0	6.1			
FM (30°-60°)	1755.1	36.8			
FH (60°-80°)	2190.2	45.9			G2/5000
FVH (80°-90°)	47.9	1.0			G1/100
BL (0°-30°)	129.1	2.7	B1/500		
BM (30°-60°)	245.5	5.1	B1/1000		
BH (60°-80°)	114.9	2.4	B1/500		G1/500
BVH (80°-90°)	0.4	0.0			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G2

Type IV Short

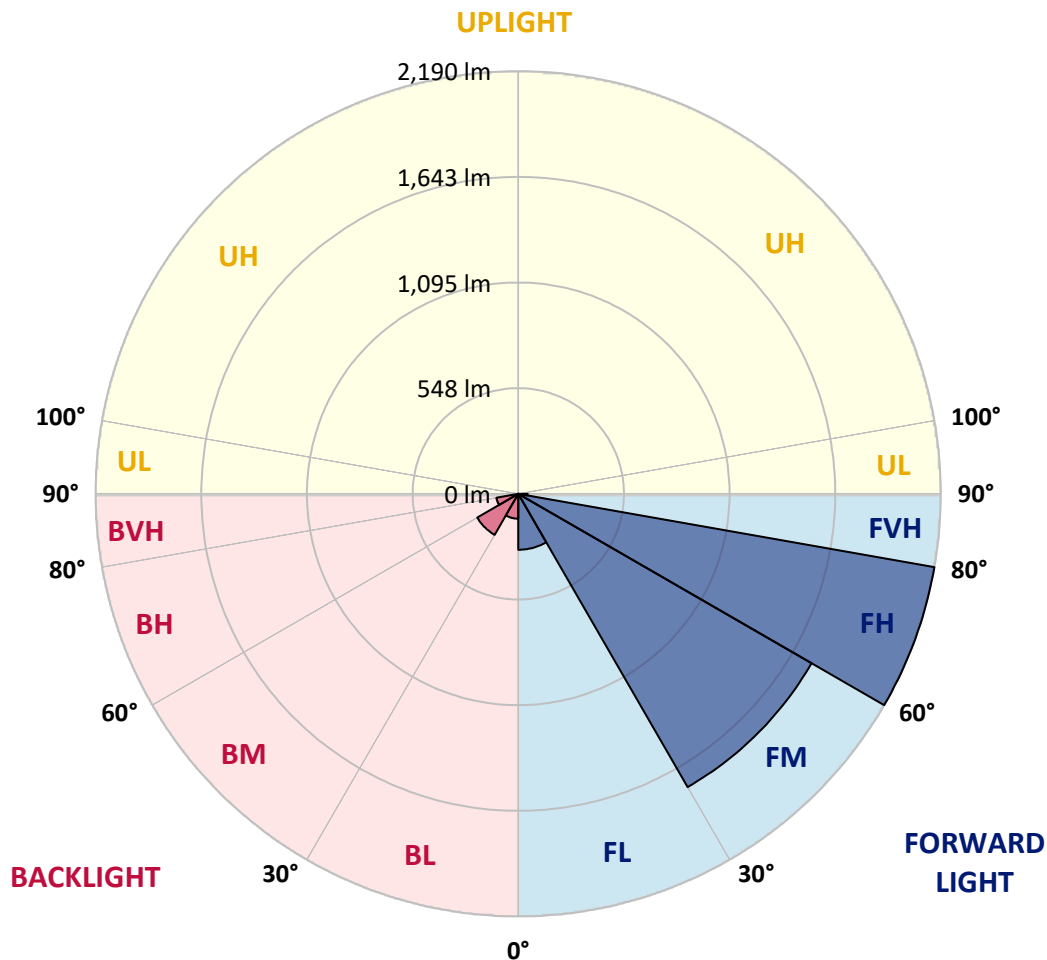



REPORT NUMBER: P386292

CATALOG NUMBER: GAW-SA1D-830-U-T4W-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	46°	55°	65°	75°	85°
0°	478.2	478.2	478.2	478.2	478.2	478.2	478.2	478.2	478.2	478.2	478.2
2.5°	531.3	530.6	527.5	526.1	518.5	514.0	512.3	506.7	498.6	490.5	481.6
5°	591.7	591.5	585.7	580.1	565.7	552.3	549.8	536.9	518.7	501.7	484.7
7.5°	653.5	650.6	644.7	634.0	613.2	591.7	589.7	571.3	545.6	521.0	496.6
10°	705.8	704.0	696.4	680.1	655.7	631.3	628.8	606.2	577.2	546.9	515.8
12.5°	746.6	745.2	735.1	714.8	688.8	663.5	660.2	640.0	608.9	575.1	538.4
15°	771.4	770.7	758.4	736.7	711.2	689.3	686.4	668.7	639.8	604.5	563.1
17.5°	777.2	777.4	764.7	742.8	721.7	706.1	703.8	690.4	666.2	631.1	587.7
20°	764.2	766.9	755.5	736.5	723.5	715.2	713.4	705.4	685.0	651.9	607.4
22.5°	745.9	747.2	739.4	726.6	721.3	722.8	721.9	717.5	700.2	669.8	626.8
25°	734.7	734.7	730.0	719.3	722.8	732.5	732.7	731.8	718.1	691.7	650.6
27.5°	734.3	732.9	727.5	719.5	729.3	744.1	745.0	751.0	742.5	718.4	680.1
30°	752.2	750.6	739.2	728.7	741.2	757.1	759.3	772.5	768.3	747.2	713.0
32.5°	794.0	788.4	763.1	745.9	755.3	774.3	777.2	798.3	805.0	782.8	744.8
35°	851.3	833.6	797.1	778.6	779.5	799.4	802.1	832.9	852.9	815.5	769.4
37.5°	930.3	921.6	862.3	812.6	816.6	846.8	854.6	888.2	882.6	833.4	797.4
40°	1103.5	1089.9	1026.7	907.9	852.2	885.3	887.8	905.7	906.1	873.9	855.5
42.5°	1339.4	1333.8	1267.3	1080.9	922.2	911.0	915.5	945.7	979.5	959.4	958.5
45°	1600.5	1597.6	1527.1	1310.5	1063.9	995.4	1001.0	1041.5	1106.2	1110.7	1139.1
47.5°	1810.7	1809.3	1768.8	1566.7	1280.7	1138.4	1140.2	1183.2	1296.9	1353.0	1398.5
50°	2002.2	2008.7	1976.7	1844.0	1576.1	1362.4	1358.2	1386.8	1569.4	1661.4	1717.8
52.5°	2268.5	2277.7	2188.0	2102.7	1886.1	1640.4	1637.0	1667.0	1897.1	1966.0	1976.1
55°	2503.7	2488.1	2417.1	2392.5	2264.1	1983.7	1982.8	2009.2	2213.9	2243.3	2261.8
57.5°	2607.6	2601.5	2635.8	2692.2	2660.0	2389.4	2387.4	2367.2	2497.5	2500.6	2557.7
60°	2673.2	2680.5	2785.5	2959.4	3039.7	2826.0	2813.0	2690.2	2768.3	2761.3	2822.4
62.5°	2623.9	2638.5	2827.3	3117.2	3323.9	3207.1	3188.8	2986.0	2999.7	2975.7	3032.6
65°	2362.5	2385.1	2694.6	3087.4	3464.9	3505.0	3486.4	3247.2	3183.4	3144.0	3112.5
67.5°	1918.3	1931.7	2254.9	2828.5	3401.4	3682.7	3678.9	3476.1	3322.1	3115.6	2870.8
69°	1585.3	1598.5	1909.6	2555.9	3261.5	3720.7	3728.1	3549.5	3295.7	2942.8	2543.6
70°	1342.7	1356.8	1646.6	2322.3	3099.3	3703.0	3716.2	3542.6	3220.1	2742.8	2256.5
72.5°	704.3	716.3	1013.8	1599.9	2526.6	3400.2	3440.3	3243.1	2729.6	1991.9	1334.2
75°	221.3	228.3	395.9	836.3	1729.9	2643.8	2653.0	2544.0	1938.2	1095.7	555.7
77.5°	84.4	82.4	131.8	308.2	874.6	1664.8	1720.9	1589.8	1017.1	387.4	128.2
80°	45.4	45.7	68.5	127.6	374.2	855.5	903.0	770.5	361.4	120.8	29.5
82.5°	19.7	20.6	38.5	67.6	171.9	315.5	339.3	282.4	138.1	81.2	11.0
85°	4.3	4.7	18.6	36.7	70.0	88.6	92.9	91.5	87.9	63.1	4.3
87.5°	0.0	0.0	8.3	13.2	17.7	20.1	17.7	23.1	48.6	42.5	2.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P386292

CATALOG NUMBER: GAW-SA1D-830-U-T4W-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	478.2	478.2	478.2	478.2	478.2	478.2	478.2	478.2	478.2	478.2	478.2
2.5°	478.7	474.7	467.7	460.1	454.7	449.1	444.7	442.7	440.4	438.8	440.9
5°	477.8	470.0	456.5	443.5	434.2	426.5	420.3	417.8	415.4	413.6	413.3
7.5°	485.6	474.7	454.1	435.0	420.5	410.2	401.7	398.1	395.2	393.9	392.7
10°	500.6	486.5	459.0	434.2	415.4	397.9	379.5	365.4	356.3	352.0	350.5
12.5°	520.1	502.4	468.4	438.8	411.5	378.0	339.0	305.5	283.8	276.6	272.4
15°	542.9	521.0	480.7	444.9	397.7	336.4	270.3	226.5	206.3	202.3	197.8
17.5°	564.8	540.7	495.5	446.0	367.2	268.8	198.1	168.3	160.5	163.1	163.8
20°	584.1	560.1	510.0	436.2	312.0	201.6	153.3	145.9	148.8	154.0	154.9
22.5°	603.6	578.9	523.4	410.2	241.2	153.1	138.1	139.9	142.8	147.9	148.8
25°	627.3	601.8	536.0	362.5	181.0	130.2	131.1	133.8	136.7	141.4	141.9
27.5°	654.6	630.6	544.3	300.5	134.3	119.7	122.6	126.7	129.6	134.0	134.9
30°	690.8	668.7	546.9	236.3	112.6	110.3	111.7	116.6	120.8	124.9	125.5
32.5°	724.9	706.3	538.0	178.4	104.3	101.6	101.6	104.5	109.4	113.2	114.1
35°	756.2	744.1	509.3	130.5	98.0	93.5	91.3	91.3	94.4	97.6	98.5
37.5°	797.6	797.1	463.0	104.1	92.0	86.8	82.1	78.5	77.4	78.1	78.5
40°	868.5	869.2	402.6	93.3	86.8	79.9	72.7	66.2	60.2	58.2	58.0
42.5°	979.3	969.2	339.3	88.2	82.4	72.7	62.0	53.3	43.9	41.0	40.7
45°	1155.2	1095.4	272.1	83.5	77.7	64.7	51.2	39.4	31.8	29.5	29.5
47.5°	1411.4	1261.3	210.8	78.3	71.4	55.5	38.7	28.4	23.3	22.2	22.4
50°	1676.4	1423.7	161.6	71.8	63.8	45.9	28.6	20.6	17.7	17.7	17.9
52.5°	1911.4	1542.8	126.0	64.9	54.4	36.0	21.7	16.1	14.8	14.5	14.8
55°	2131.4	1619.6	96.5	56.8	43.2	26.9	16.6	13.2	12.3	11.9	11.6
57.5°	2343.5	1657.6	72.3	45.9	31.3	19.5	13.2	11.2	10.3	9.6	9.4
60°	2484.7	1626.7	49.7	33.8	21.7	14.1	11.0	9.6	8.5	7.8	7.6
62.5°	2564.4	1542.4	32.0	24.4	15.4	10.5	8.7	8.1	6.5	5.8	5.8
65°	2532.2	1403.2	22.4	17.5	11.2	7.8	6.5	6.5	4.7	3.8	3.6
67.5°	2243.9	1185.4	17.0	13.0	8.1	5.8	4.9	5.6	2.9	1.8	1.8
69°	1930.6	982.4	14.5	10.7	6.7	4.7	4.3	5.1	2.0	1.3	1.1
70°	1678.0	847.5	13.2	9.4	5.6	4.0	3.8	4.9	2.0	1.1	0.9
72.5°	1003.9	472.6	10.1	6.7	3.6	3.1	3.1	5.6	2.0	1.1	0.9
75°	405.7	166.5	7.4	4.7	2.7	2.7	3.8	7.2	1.8	0.9	0.7
77.5°	92.0	36.5	4.3	2.9	1.8	2.7	4.5	5.6	1.1	0.4	0.0
80°	22.4	9.0	2.7	1.8	1.1	2.0	3.4	3.1	0.2	0.0	0.0
82.5°	7.4	3.1	1.1	0.9	0.2	0.7	1.6	0.9	0.0	0.0	0.0
85°	3.1	1.8	0.4	0.2	0.0	0.0	0.2	0.0	0.0	0.0	0.0
87.5°	2.0	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)