

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: STREETWORKS

Report Number: P362160

Luminaire Tested: NVN-SA2D-727-U-SLL

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-2019  
Report Number: P362160  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1903-205-26)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: STREETWORKS  
Catalog Number: NVN-SA2D-727-U-SLL  
Description: NAVION ROADWAY AND AREA LUMINAIRE  
(2) 70 CRI, 2700K, 1200mA LIGHTSQUARES WITH 16 LEDS EACH AND SPILL LIGHT  
ELIMINATOR LEFT OPTICS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11726 lumens  
Efficiency: N/A  
Efficacy: 90.9 lumens/watt  
Luminous Opening: Rectangular (W 0.5' x L: 1' x H: 0')  
IES Classification: Type III - Medium  
BUG Rating: B2 - U0 - G3


Input Watts (W): 129  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

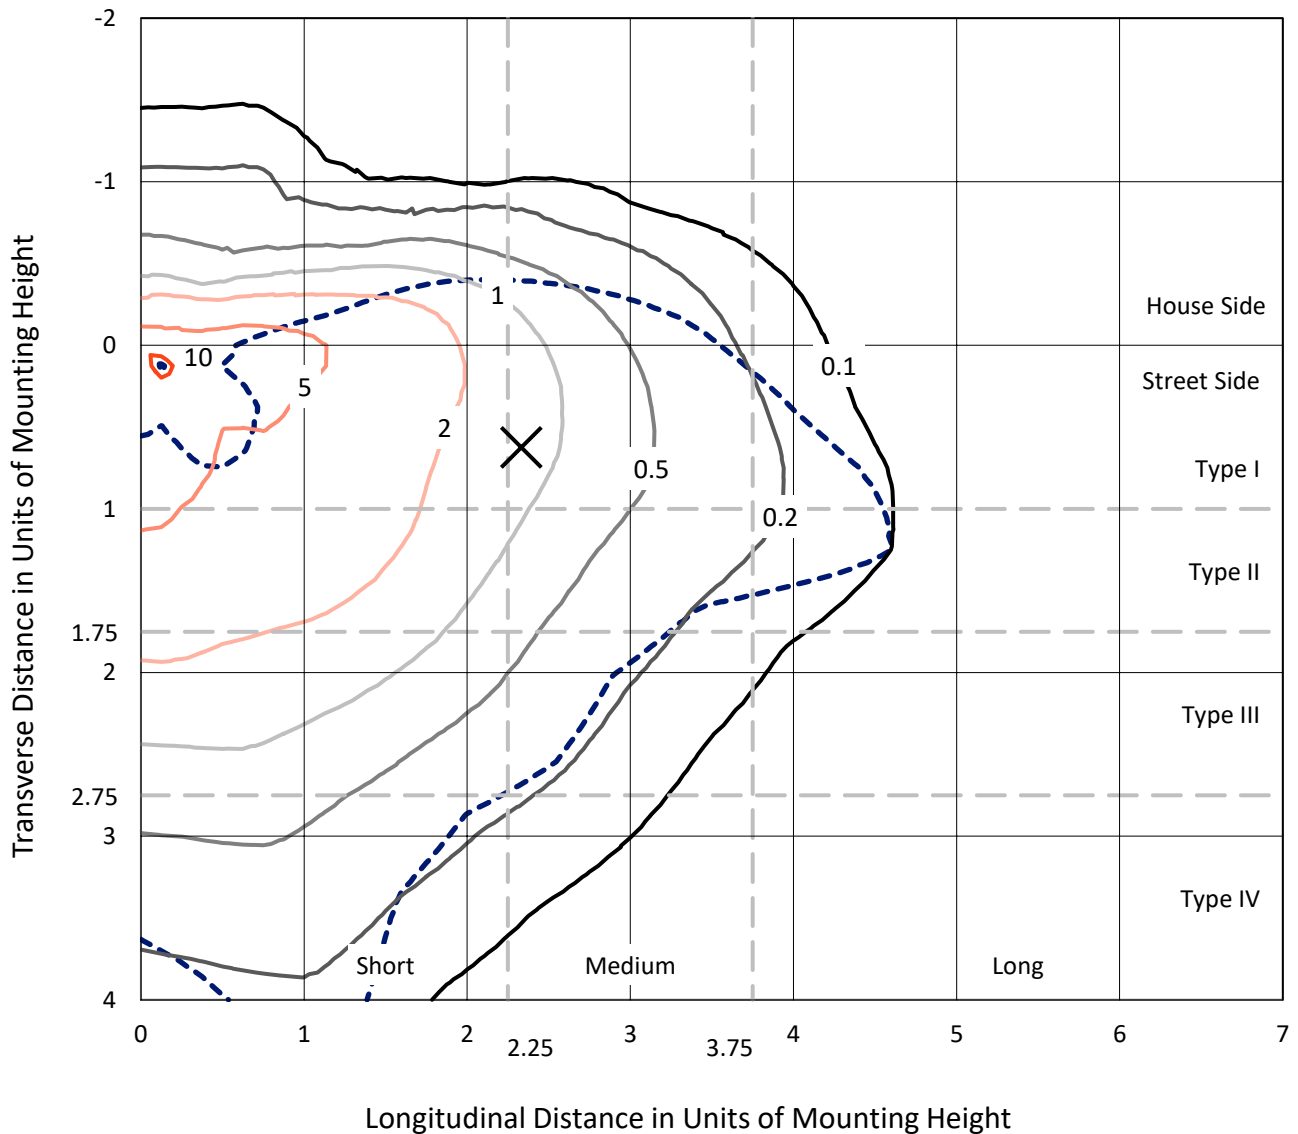

Based on 20 foot mounting height. Maximum calculated value = 11.2 fc  
 Type III - Medium - N/A

REPORT NUMBER: P362160  
CATALOG NUMBER: NVN-SA2D-727-U-SLL

### Luminous Intensity Polar Plot

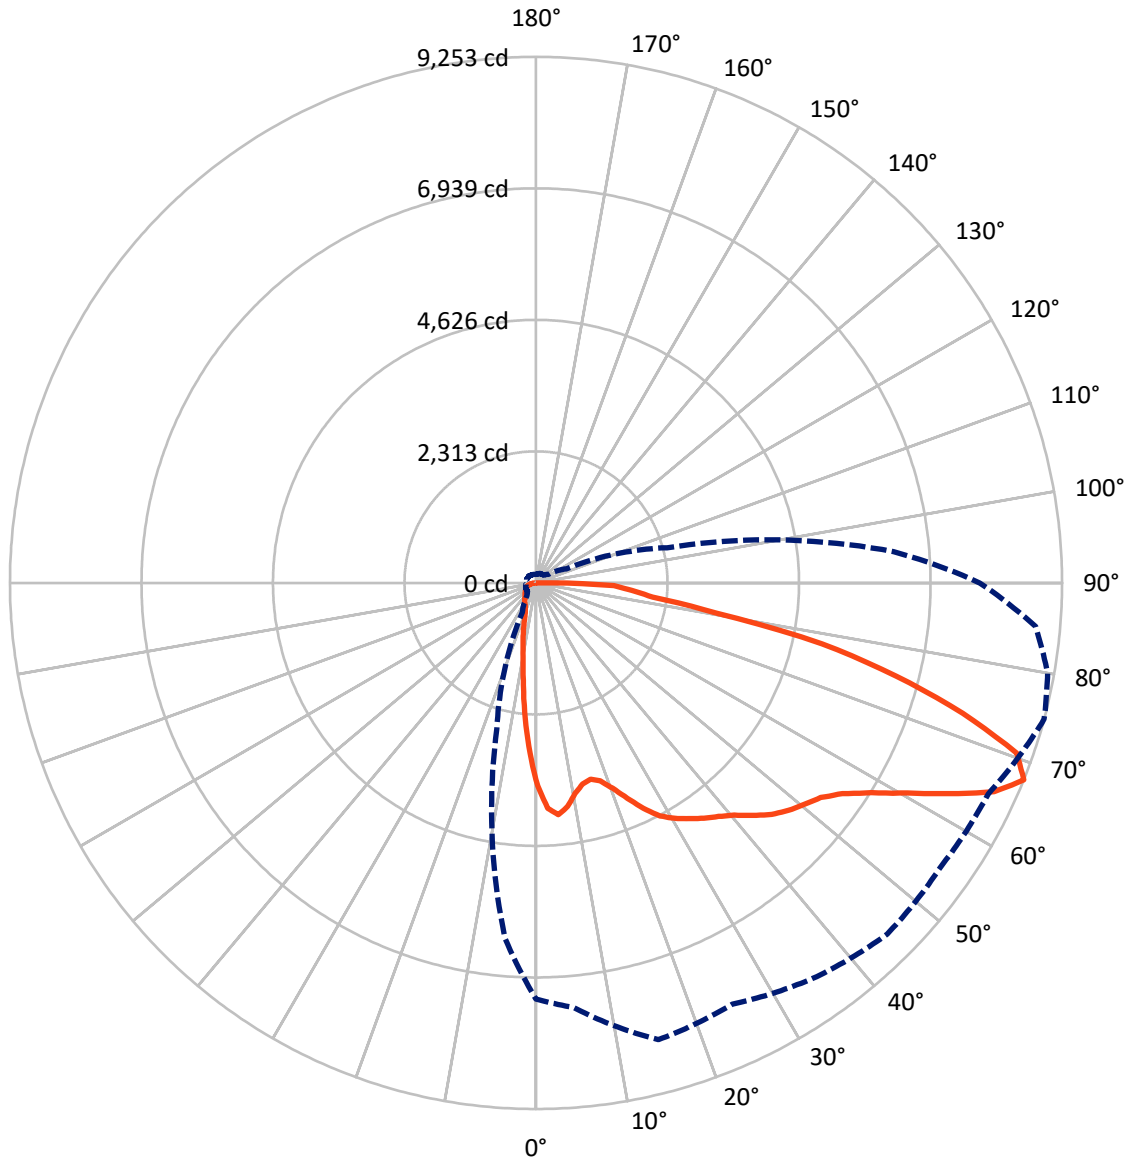

— Vertical Plane Through 75-Deg Lateral      - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	2065.2	0.0	2065.2
	% Fixture	17.6	0.0	17.6
<b>Street Side</b>	Lumens	9660.8	0.0	9660.8
	% Fixture	82.4	0.0	82.4
<b>Total</b>	Lumens	11726.0	0.0	11726.0
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	275.7	2.4
10°-20°	572.8	4.9
20°-30°	814.6	6.9
30°-40°	1173.8	10.0
40°-50°	1654.2	14.1
50°-60°	2299.7	19.6
60°-70°	2781.0	23.7
70°-80°	1709.4	14.6
80°-90°	444.8	3.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	11726.0	100.0
0°-180°	11726.0	100.0

**Coefficient of Utilization**




REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	1164.3	9.9			
FM (30°-60°)	4190.2	35.7			
FH (60°-80°)	3911.4	33.4			G2/5000
FVH (80°-90°)	394.8	3.4			G3/500
BL (0°-30°)	498.8	4.3	B1/500		
BM (30°-60°)	937.5	8.0	B1/1000		
BH (60°-80°)	579.0	4.9	B2/1000		G2/1000
BVH (80°-90°)	50.0	0.4			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B2-U0-G3**  
 Type III Medium

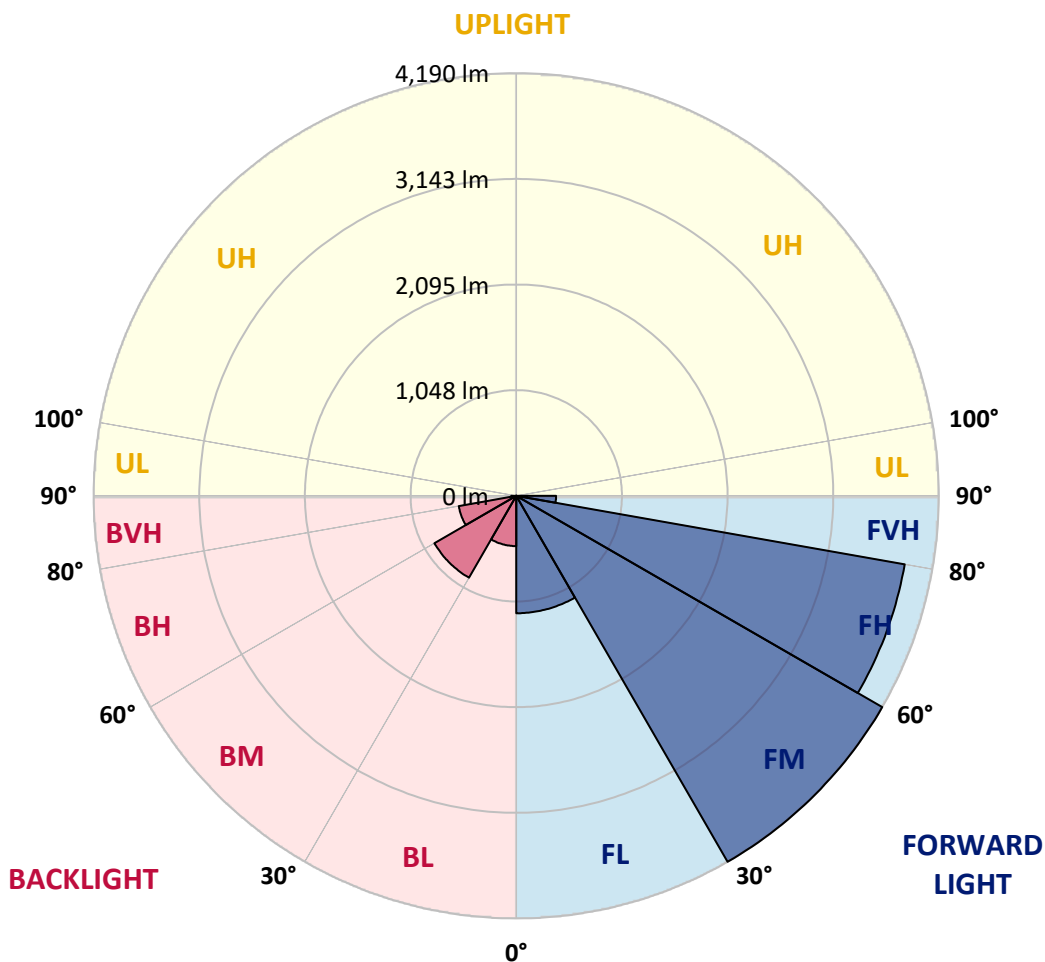



REPORT NUMBER: P362160

CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4
2.5°	3807.7	3857.9	3892.6	3926.8	3953.5	3979.8	4018.2	4056.7	4064.2	4071.2	4056.2
5°	3785.2	3907.6	4011.7	4115.3	4211.4	4307.5	4365.1	4422.8	4434.5	4446.3	4410.2
7.5°	3542.8	3723.3	3903.8	4084.3	4249.8	4415.3	4516.1	4616.4	4639.4	4661.9	4602.8
10°	3267.2	3477.2	3699.0	3920.7	4138.7	4356.7	4502.5	4648.3	4677.4	4706.4	4632.8
12.5°	3057.6	3286.9	3523.6	3760.4	3990.6	4220.3	4371.2	4522.2	4558.3	4594.4	4541.0
15°	2977.0	3228.3	3451.0	3673.6	3874.3	4074.5	4198.3	4321.5	4336.6	4351.1	4342.6
17.5°	3057.6	3334.7	3536.3	3737.4	3846.6	3955.4	4005.1	4054.3	4070.7	4086.7	4108.2
20°	3293.4	3592.5	3734.6	3876.2	3871.5	3866.3	3842.4	3818.0	3813.8	3809.6	3870.5
22.5°	3630.0	3977.4	4034.2	4090.4	3958.7	3826.9	3746.8	3666.1	3650.2	3633.8	3698.5
25°	4025.3	4395.2	4384.8	4374.1	4123.2	3872.0	3719.1	3566.3	3548.5	3530.7	3586.0
27.5°	4455.2	4808.6	4741.1	4673.6	4332.8	3992.0	3770.2	3548.5	3530.7	3512.8	3561.6
30°	4791.3	5112.0	5003.7	4895.4	4509.5	4123.7	3860.2	3596.8	3567.7	3538.2	3598.2
32.5°	5075.9	5348.7	5203.4	5058.1	4653.0	4247.9	3962.9	3677.9	3632.4	3586.9	3667.1
35°	5372.2	5585.0	5380.6	5175.7	4781.0	4385.8	4084.3	3782.4	3726.6	3670.8	3781.0
37.5°	5705.5	5882.2	5588.8	5294.8	4924.9	4555.0	4266.2	3977.0	3919.8	3862.6	4003.2
40°	6057.6	6204.8	5813.3	5421.9	5082.4	4743.0	4518.0	4292.5	4238.1	4183.2	4353.9
42.5°	6365.6	6472.9	6022.4	5571.9	5272.3	4972.3	4813.8	4654.9	4654.4	4653.5	4826.5
45°	6597.7	6690.9	6196.8	5702.2	5457.5	5212.3	5129.8	5047.3	5113.4	5179.5	5336.1
47.5°	6790.3	6853.6	6343.1	5832.1	5669.4	5506.7	5518.9	5531.1	5665.6	5800.2	5901.0
50°	7010.7	6959.6	6475.8	5991.5	5941.3	5891.1	6000.8	6110.1	6264.8	6419.0	6487.5
52.5°	7249.3	7113.8	6655.8	6197.3	6253.5	6309.8	6533.0	6756.1	6912.2	7068.3	7094.1
55°	7678.3	7470.6	6986.8	6502.5	6610.8	6718.6	7046.3	7373.5	7495.4	7617.3	7626.7
57.5°	8161.6	7977.4	7450.4	6923.5	7039.7	7156.0	7534.3	7912.2	8044.0	8175.2	8156.9
60°	8347.7	8356.7	7890.6	7424.2	7541.4	7658.6	8027.1	8395.6	8547.0	8698.0	8657.6
62.5°	8160.2	8380.1	8131.2	7881.7	7988.2	8094.1	8455.1	8816.1	8971.3	9126.4	9056.1
65°	7789.4	8007.4	8119.0	8230.5	8265.7	8300.9	8637.9	8974.6	9093.6	9212.2	9176.6
67.5°	7317.8	7494.0	7905.7	8316.8	8246.0	8175.2	8333.2	8491.2	8613.6	8735.9	8715.8
70°	6771.6	6981.6	7530.6	8079.6	7731.7	7383.4	7318.2	7253.1	7385.3	7517.0	7435.4
72.5°	5792.2	6109.1	6694.7	7279.8	6638.9	5998.0	5775.3	5552.7	5720.0	5887.4	5757.5
75°	4375.0	4795.5	5442.5	6089.0	5324.3	4559.7	4262.5	3965.2	4109.2	4253.1	4164.0
77.5°	3042.6	3570.0	4207.2	4844.3	4067.0	3289.2	3068.4	2847.1	2890.3	2932.9	2917.9
80°	2074.5	2421.4	2865.9	3309.8	2792.3	2274.7	2292.0	2308.9	2288.8	2268.1	2298.1
82.5°	1301.0	1545.2	1888.4	2231.1	1956.4	1681.6	1839.2	1996.7	1919.3	1841.5	1870.6
85°	732.8	881.8	1217.5	1552.7	1447.2	1341.3	1433.6	1525.5	1405.5	1285.5	1338.5
87.5°	139.7	232.5	673.7	1114.4	1011.7	909.0	790.0	670.9	511.9	353.0	515.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4
2.5°	4041.2	4033.2	4025.3	3996.7	3967.6	3924.5	3888.8	3826.9	3793.2	3742.1	3691.0
5°	4373.6	4323.0	4272.3	4185.1	4097.5	3999.9	3887.9	3763.7	3669.9	3548.0	3426.1
7.5°	4543.8	4425.6	4307.0	4139.6	3971.8	3820.9	3643.6	3478.6	3338.0	3179.5	3021.1
10°	4559.2	4382.0	4204.3	3986.8	3768.8	3585.5	3381.6	3198.3	3029.5	2847.6	2665.2
12.5°	4487.0	4298.6	4109.6	3870.1	3630.0	3421.9	3202.5	2997.1	2810.1	2609.9	2409.2
15°	4334.2	4183.7	4032.8	3808.2	3583.6	3373.6	3160.8	2917.4	2706.0	2501.1	2295.8
17.5°	4129.3	4058.1	3986.3	3824.1	3661.5	3479.6	3273.3	2987.8	2740.2	2517.5	2294.9
20°	3931.0	3957.3	3983.1	3918.4	3853.7	3707.9	3527.8	3207.2	2891.2	2600.1	2308.5
22.5°	3762.7	3888.8	4014.5	4064.6	4114.3	4026.7	3886.0	3515.2	3097.0	2716.8	2336.6
25°	3640.8	3849.9	4059.0	4225.9	4392.3	4353.4	4245.1	3889.3	3369.9	2885.1	2399.9
27.5°	3610.4	3866.8	4123.2	4382.0	4640.3	4676.4	4646.4	4283.6	3695.2	3094.2	2492.7
30°	3658.2	3917.9	4177.2	4492.2	4806.8	4950.7	4991.0	4612.2	4067.0	3338.0	2608.5
32.5°	3747.2	4001.8	4256.4	4599.6	4942.3	5159.8	5288.2	4912.7	4326.2	3521.7	2716.8
35°	3891.2	4129.3	4367.5	4724.7	5082.0	5363.3	5597.7	5223.1	4556.4	3650.2	2743.5
37.5°	4143.4	4348.3	4553.1	4883.2	5212.8	5577.5	5929.6	5564.9	4805.4	3774.0	2742.1
40°	4524.5	4669.4	4813.8	5092.8	5371.2	5830.2	6305.6	5946.0	5080.6	3908.1	2735.5
42.5°	4999.5	5074.0	5148.1	5368.9	5589.7	6094.1	6646.9	6318.7	5343.1	4032.8	2722.4
45°	5492.2	5511.9	5531.6	5670.8	5809.6	6303.2	6879.4	6598.6	5572.4	4141.1	2709.3
47.5°	6001.3	5933.8	5866.3	5921.6	5976.9	6463.6	7045.4	6811.0	5802.5	4261.1	2719.1
50°	6555.9	6367.9	6179.9	6150.9	6121.8	6623.9	7240.9	7081.0	6079.1	4435.9	2792.7
52.5°	7119.4	6809.6	6499.7	6384.8	6269.5	6815.2	7500.1	7417.1	6473.9	4706.9	2939.5
55°	7636.1	7241.8	6847.5	6692.8	6538.1	7107.7	7816.6	7910.8	6979.7	5053.4	3126.5
57.5°	8138.2	7691.4	7244.6	7101.2	6957.7	7537.6	8217.4	8353.8	7490.7	5385.8	3280.3
60°	8617.3	8175.2	7732.7	7617.8	7502.5	8072.1	8650.6	8551.2	7754.2	5541.4	3328.1
62.5°	8985.8	8634.2	8282.6	8222.1	8161.2	8612.6	8983.5	8474.3	7586.9	5388.1	3189.4
65°	9141.0	8940.8	8740.1	8796.9	8853.1	9021.4	9066.4	8249.3	7060.8	4958.7	2856.5
67.5°	8695.1	8735.9	8776.7	9014.9	9252.6	9136.8	8819.8	7805.8	6312.1	4350.1	2388.2
70°	7353.4	7598.1	7842.4	8405.9	8968.9	8712.0	8159.3	7009.7	5411.1	3649.3	1887.0
72.5°	5627.2	5902.4	6177.1	7013.5	7849.4	7612.6	6935.7	5757.5	4338.4	2914.2	1489.4
75°	4074.5	4385.3	4695.7	5618.3	6540.9	6212.3	5187.9	4122.3	3295.3	2224.5	1153.3
77.5°	2902.4	3110.6	3318.8	4230.1	5141.0	4605.7	3453.3	2774.0	2280.8	1546.2	811.1
80°	2328.1	2264.4	2200.6	2708.4	3216.1	3127.0	2284.1	1781.5	1578.5	1036.1	493.7
82.5°	1899.2	1743.5	1587.9	1827.0	2066.1	2052.9	1585.1	1307.1	1174.9	720.1	265.4
85°	1391.0	1328.6	1266.3	1477.7	1689.1	1508.7	1073.6	830.7	916.1	530.2	144.4
87.5°	678.4	775.0	871.1	1120.5	1369.4	1028.1	325.8	161.3	223.2	146.7	69.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160

CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4
2.5°	3653.0	3614.6	3571.0	3527.4	3477.7	3427.5	3398.0	3368.0	3335.6	3303.3	3266.7
5°	3345.5	3264.8	3173.4	3082.0	2991.5	2901.0	2852.3	2803.5	2752.0	2699.9	2654.9
7.5°	2903.8	2786.2	2659.6	2532.5	2420.0	2307.0	2237.2	2166.9	2103.1	2038.9	1985.0
10°	2515.2	2365.2	2238.1	2110.6	2025.8	1940.9	1876.7	1812.4	1750.6	1688.2	1628.7
12.5°	2259.2	2109.2	2028.6	1947.9	1877.6	1807.3	1733.2	1658.7	1573.8	1488.5	1426.1
15°	2159.4	2022.9	1933.4	1843.4	1749.2	1654.5	1563.5	1472.6	1372.2	1271.9	1201.1
17.5°	2116.2	1937.6	1812.4	1686.8	1562.6	1438.3	1332.8	1227.4	1117.7	1008.0	936.2
20°	2070.8	1833.1	1665.2	1496.9	1337.5	1178.1	1058.6	939.0	841.1	743.1	688.2
22.5°	2029.5	1722.0	1511.5	1300.5	1112.0	923.6	806.4	688.7	628.7	568.7	546.6
25°	2012.6	1624.9	1366.1	1107.3	908.6	709.3	625.9	542.4	519.4	496.0	484.8
27.5°	2015.4	1538.2	1243.8	948.9	769.8	590.7	533.5	476.3	462.3	447.7	440.7
30°	2026.2	1444.0	1128.4	812.9	665.3	517.6	480.5	443.0	428.0	413.0	404.1
32.5°	2038.4	1359.6	1039.4	718.7	598.2	477.3	446.8	415.8	401.3	386.8	377.9
35°	2017.3	1290.7	978.4	666.2	555.1	443.5	417.7	391.5	375.5	359.6	351.1
37.5°	1981.7	1221.3	931.1	640.4	526.9	413.0	394.3	375.1	358.6	341.8	333.8
40°	1949.3	1162.7	895.9	628.7	511.5	393.8	377.9	361.9	345.0	327.7	318.3
42.5°	1923.1	1123.3	861.2	599.1	497.4	395.2	372.7	349.7	333.3	316.9	306.6
45°	1903.4	1097.5	834.0	570.5	484.3	398.0	369.4	340.8	324.4	307.5	295.4
47.5°	1901.5	1083.9	814.8	545.7	459.4	372.7	361.0	349.3	325.4	301.0	286.9
50°	1927.3	1061.9	792.3	522.3	435.5	348.8	364.7	380.2	339.4	298.2	280.4
52.5°	1981.2	1023.0	756.7	490.4	406.5	322.1	346.9	371.3	336.1	300.5	277.5
55°	2046.4	965.8	702.8	439.3	368.0	296.3	318.3	339.9	317.9	295.4	267.7
57.5°	2087.2	893.6	634.8	376.0	324.9	273.8	286.4	298.6	289.7	280.8	252.7
60°	2062.8	797.5	558.4	318.8	286.9	255.0	252.7	249.9	263.0	276.1	243.8
62.5°	1943.7	698.1	490.9	283.6	259.7	235.3	230.2	224.6	246.1	267.2	233.0
65°	1742.6	628.7	448.2	267.7	241.0	214.2	208.6	203.0	209.6	216.1	200.2
67.5°	1487.1	586.0	423.8	261.6	229.3	196.4	189.9	183.3	181.9	180.5	174.9
70°	1223.6	559.8	407.9	256.0	216.6	176.7	170.6	164.6	162.7	160.3	156.1
72.5°	1023.0	556.5	406.0	255.5	206.3	157.1	151.4	145.8	143.5	140.6	137.4
75°	837.8	522.3	385.4	248.5	192.2	135.5	130.3	125.2	123.3	121.0	118.1
77.5°	621.7	432.2	324.0	215.7	164.6	113.5	108.3	102.7	102.2	101.3	98.9
80°	403.2	312.7	231.6	150.5	120.0	89.1	84.9	80.2	80.6	81.1	79.2
82.5°	224.1	182.4	141.6	100.8	82.0	63.3	61.4	59.1	60.5	61.4	59.1
85°	118.1	91.9	75.9	60.0	47.4	34.7	34.7	34.2	36.1	38.0	36.1
87.5°	51.1	32.3	27.7	22.5	12.7	2.3	2.8	2.8	3.8	4.7	4.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4
2.5°	3229.7	3195.5	3160.8	3122.8	3129.8	3100.8	3071.7	3053.4	3035.1	3029.5	3023.9
5°	2609.9	2571.0	2531.6	2496.4	2526.9	2506.3	2485.7	2482.9	2479.6	2479.6	2479.1
7.5°	1931.1	1889.3	1847.1	1818.1	1848.1	1844.3	1840.6	1860.7	1880.9	1897.3	1913.2
10°	1569.1	1518.5	1467.4	1424.3	1416.8	1395.2	1373.2	1377.9	1382.1	1399.9	1417.7
12.5°	1363.8	1303.3	1242.8	1192.2	1169.2	1133.6	1097.5	1075.0	1052.5	1054.8	1056.7
15°	1129.8	1071.2	1012.2	968.6	954.0	926.4	898.7	870.6	842.0	830.3	818.1
17.5°	864.0	817.1	769.8	740.7	740.7	732.8	724.8	710.7	696.2	684.5	672.3
20°	633.4	608.5	583.2	571.0	574.8	575.2	575.2	582.3	589.3	585.6	581.8
22.5°	524.1	515.2	506.3	501.2	503.0	503.5	504.0	510.5	516.6	521.3	525.5
25°	473.0	467.4	461.8	459.9	464.1	464.6	464.6	468.8	473.0	477.7	482.4
27.5°	433.2	430.8	428.5	425.2	429.4	429.4	429.0	433.7	437.9	442.1	445.8
30°	395.2	396.1	396.6	395.7	398.5	400.4	401.8	405.1	407.9	411.2	414.4
32.5°	368.5	367.1	365.7	364.7	370.8	374.1	377.4	380.7	383.5	384.9	386.3
35°	342.7	339.4	336.1	333.8	339.4	343.6	347.9	354.0	359.6	360.5	361.5
37.5°	325.4	321.1	316.9	314.1	316.5	318.3	320.2	326.8	333.3	337.1	340.4
40°	308.9	304.7	300.5	298.2	299.6	300.0	300.5	303.8	306.6	313.6	320.2
42.5°	295.8	290.7	285.5	282.7	283.6	284.6	285.0	284.6	284.1	290.7	297.2
45°	282.7	277.1	271.4	268.2	268.6	268.6	268.6	267.7	266.3	269.6	272.9
47.5°	272.4	265.8	259.3	256.0	255.0	254.1	253.2	252.7	251.8	254.1	256.0
50°	262.1	255.0	247.5	243.8	241.4	240.5	239.6	239.1	238.2	240.5	242.4
52.5°	254.1	245.7	237.2	231.1	228.8	227.4	226.0	226.4	226.4	227.4	227.8
55°	240.0	232.5	224.6	220.3	216.1	215.2	214.2	215.7	216.6	216.6	216.6
57.5°	224.6	217.5	210.0	207.2	203.5	203.5	203.0	204.9	206.3	207.2	208.2
60°	211.0	203.0	195.0	192.7	191.3	190.8	190.3	192.7	194.6	196.4	198.3
62.5°	198.3	189.9	181.4	178.6	178.2	178.6	178.6	181.0	182.8	184.7	186.6
65°	184.2	175.8	166.9	164.1	165.0	166.4	167.8	169.7	171.1	173.0	174.9
67.5°	168.8	161.7	154.2	151.4	151.9	153.8	155.6	157.1	158.0	159.9	161.7
70°	151.9	145.8	139.7	137.8	137.4	139.7	141.6	142.5	143.5	145.8	147.7
72.5°	133.6	128.5	123.3	121.9	122.4	123.8	125.2	126.6	127.5	129.9	131.7
75°	114.9	110.2	105.5	104.5	105.5	106.9	108.3	109.2	110.2	113.0	115.3
77.5°	96.6	91.4	85.8	85.3	86.7	88.1	89.1	90.5	91.9	95.6	99.4
80°	77.4	71.7	65.6	65.2	66.6	68.0	69.4	70.8	72.2	76.9	81.1
82.5°	56.7	50.2	43.6	42.7	47.4	48.8	50.2	52.5	54.4	58.6	62.8
85°	34.2	27.7	21.1	20.6	24.8	27.2	29.5	32.3	34.7	38.4	42.2
87.5°	3.8	1.9	0.0	0.0	0.5	2.3	4.2	6.6	8.9	12.7	15.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4
2.5°	3003.2	2982.1	3003.7	3024.8	3033.7	3042.6	3019.6	2996.2	3032.8	3068.9	3078.2
5°	2460.3	2441.1	2455.7	2469.7	2438.3	2406.9	2403.6	2399.9	2427.1	2454.3	2458.5
7.5°	1907.1	1901.1	1914.6	1928.2	1888.4	1848.1	1828.4	1808.7	1815.3	1821.8	1820.9
10°	1421.9	1425.7	1442.5	1459.0	1428.0	1397.1	1383.5	1369.9	1384.9	1399.4	1413.0
12.5°	1065.2	1073.1	1090.9	1108.3	1095.6	1082.5	1083.9	1085.3	1102.7	1119.5	1134.5
15°	827.5	836.8	849.5	861.7	862.2	862.2	874.3	886.1	884.7	883.3	893.6
17.5°	684.9	697.1	698.5	699.9	700.4	700.9	699.9	699.0	692.0	684.9	692.9
20°	586.5	590.7	594.5	597.7	593.5	588.8	577.1	565.4	560.7	556.0	563.5
22.5°	533.5	541.0	537.3	533.0	524.6	515.7	506.8	497.4	496.9	496.0	500.2
25°	489.0	495.1	488.5	481.9	475.8	469.8	463.7	457.6	457.1	456.6	458.5
27.5°	451.9	457.6	451.5	445.4	440.2	435.1	430.4	425.7	424.7	423.8	424.3
30°	420.1	425.2	420.1	414.4	410.7	406.5	403.2	399.9	399.4	399.0	399.0
32.5°	391.5	396.6	392.9	389.1	385.8	382.6	380.2	377.9	375.5	373.2	368.0
35°	366.6	371.8	369.4	366.6	362.9	359.1	354.9	350.2	344.1	337.5	334.7
37.5°	345.5	350.7	348.3	346.0	340.8	335.7	328.2	320.2	318.3	316.0	315.5
40°	328.6	336.6	331.9	326.8	318.8	310.8	307.1	303.3	302.4	301.4	300.5
42.5°	309.9	322.1	313.6	305.2	297.7	290.2	289.3	288.3	287.9	287.4	287.4
45°	286.4	299.6	291.1	282.2	278.0	273.8	273.8	273.8	274.3	274.3	275.2
47.5°	264.4	272.4	268.2	263.9	261.6	259.3	259.7	260.2	261.6	262.5	264.9
50°	245.7	248.5	249.4	249.9	248.5	247.1	248.0	248.5	249.9	250.8	252.7
52.5°	232.1	236.3	236.3	235.8	235.8	235.8	236.8	237.7	239.1	240.5	242.4
55°	223.2	229.3	227.4	225.5	226.0	226.0	226.9	227.8	229.3	230.2	233.0
57.5°	214.7	221.3	219.4	217.5	217.5	217.5	218.0	218.5	219.9	220.8	222.7
60°	204.9	211.4	209.6	207.2	207.7	208.2	208.6	208.6	209.6	210.0	210.0
62.5°	193.2	199.7	197.8	195.5	196.9	197.8	197.8	197.8	198.8	199.2	197.8
65°	181.0	187.1	185.2	183.3	185.2	186.6	187.5	188.0	187.5	187.1	185.7
67.5°	167.8	173.9	172.1	169.7	172.1	173.9	175.8	177.2	175.8	174.4	172.5
70°	153.8	159.9	157.5	155.2	157.5	159.9	161.7	163.6	161.7	159.9	159.4
72.5°	138.8	145.8	143.0	140.2	143.0	145.8	146.7	147.7	146.3	144.9	143.9
75°	122.4	129.4	127.0	124.2	126.6	128.9	129.4	129.9	129.9	129.4	126.6
77.5°	105.0	110.6	109.2	107.8	109.2	110.6	110.6	110.6	111.1	111.1	107.4
80°	84.4	87.7	88.1	88.6	89.1	89.5	89.1	88.6	87.7	86.7	84.4
82.5°	62.8	62.8	66.6	69.9	69.9	69.4	68.9	68.0	66.1	63.8	58.6
85°	39.8	37.5	43.6	49.2	49.2	48.8	47.8	46.4	42.7	38.4	34.2
87.5°	13.6	11.3	17.3	23.4	23.9	23.9	23.0	22.0	18.3	14.1	10.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4
2.5°	3092.3	3098.4	3104.0	3150.0	3195.5	3248.9	3302.3	3343.1	3383.4	3425.2	3466.9
5°	2473.0	2480.5	2488.0	2543.8	2599.1	2673.7	2748.2	2812.4	2876.7	2952.1	3027.6
7.5°	1833.1	1849.5	1865.4	1925.0	1984.0	2064.2	2143.9	2227.8	2311.3	2409.7	2508.2
10°	1439.7	1470.7	1501.2	1562.1	1623.0	1702.3	1781.0	1868.7	1956.4	2053.4	2150.0
12.5°	1165.5	1206.7	1247.5	1320.7	1393.8	1488.5	1582.7	1680.2	1777.3	1862.6	1947.9
15°	920.8	965.8	1010.3	1087.7	1165.0	1269.1	1372.7	1479.1	1585.1	1687.3	1789.5
17.5°	718.2	755.3	791.8	857.5	922.6	1023.4	1124.2	1235.8	1347.4	1472.1	1596.3
20°	579.5	594.9	610.4	657.7	704.6	786.7	868.2	982.2	1096.1	1245.2	1394.3
22.5°	507.7	515.7	523.2	546.2	568.7	621.7	674.2	775.0	875.3	1038.0	1200.2
25°	464.6	470.7	476.8	491.8	506.8	532.1	557.4	628.2	699.0	858.9	1018.3
27.5°	425.7	435.1	444.0	451.0	457.6	474.9	491.8	538.2	584.6	733.7	882.3
30°	397.6	400.8	404.1	414.9	425.2	443.0	460.8	493.2	525.5	651.7	777.3
32.5°	364.7	369.4	374.1	385.4	396.6	413.0	429.4	455.7	481.5	589.3	696.7
35°	335.2	339.9	344.6	355.8	366.6	384.4	401.8	423.8	445.4	539.1	632.9
37.5°	316.9	321.6	326.3	336.1	345.5	363.3	380.7	398.0	414.9	501.6	588.4
40°	301.4	306.1	310.8	320.2	329.1	346.5	363.3	377.9	392.4	473.5	554.6
42.5°	287.9	293.0	298.2	307.5	316.5	331.9	347.4	366.6	385.4	449.1	512.4
45°	276.6	281.8	286.4	296.8	307.1	322.1	337.1	363.8	390.5	436.5	482.4
47.5°	266.3	271.9	277.1	288.3	299.6	318.3	336.6	359.1	381.1	426.6	472.1
50°	256.4	263.0	269.6	283.2	296.3	327.7	358.6	361.9	364.7	418.7	472.1
52.5°	247.1	254.6	262.1	278.9	295.4	331.9	368.5	356.8	344.6	403.7	462.7
55°	237.7	244.3	250.3	271.0	291.6	318.3	345.0	329.6	313.6	375.5	437.4
57.5°	225.0	232.1	238.6	260.7	282.7	301.4	319.7	305.7	291.1	343.6	395.7
60°	211.9	219.9	227.8	256.0	283.6	280.4	276.6	273.8	270.5	308.0	345.5
62.5°	200.2	208.6	217.1	253.6	290.2	267.7	245.2	247.5	249.4	277.1	304.7
65°	188.5	196.9	204.9	223.2	241.4	232.5	223.6	227.4	230.7	257.8	285.0
67.5°	175.3	182.8	189.9	196.0	202.1	203.0	203.9	207.7	211.4	243.8	275.7
70°	160.8	166.9	173.0	177.2	181.0	182.8	184.2	188.9	193.6	228.8	263.9
72.5°	144.4	149.6	154.2	158.0	161.7	163.1	164.1	168.8	173.5	211.0	248.5
75°	126.6	130.8	134.6	137.8	141.1	143.0	144.9	148.1	151.4	192.2	232.5
77.5°	106.9	111.1	114.9	117.7	120.0	121.9	123.3	127.5	131.7	166.0	199.7
80°	83.4	88.6	93.3	95.6	97.5	98.0	98.0	101.7	105.5	129.9	153.8
82.5°	59.1	64.7	69.9	71.7	73.6	73.6	73.6	77.8	82.0	98.5	114.4
85°	34.7	40.8	46.4	48.3	50.2	51.1	51.6	53.4	54.9	66.6	77.8
87.5°	10.8	15.9	20.6	21.6	22.5	24.4	26.3	26.7	26.7	34.7	42.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160

CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4	3572.4
2.5°	3514.7	3562.5	3618.3	3673.6	3721.0	3768.3	3807.7
5°	3123.7	3219.8	3337.5	3454.7	3559.3	3663.8	3785.2
7.5°	2632.4	2756.6	2909.0	3061.4	3209.0	3356.3	3542.8
10°	2276.6	2402.7	2564.0	2724.8	2890.7	3056.2	3267.2
12.5°	2050.6	2152.8	2308.9	2465.0	2660.1	2854.6	3057.6
15°	1901.5	2013.1	2165.0	2316.9	2530.2	2743.5	2977.0
17.5°	1742.6	1888.4	2083.0	2277.5	2530.2	2782.4	3057.6
20°	1576.2	1757.6	2009.8	2262.0	2602.4	2942.3	3293.4
22.5°	1410.2	1620.2	1943.7	2266.7	2711.6	3156.1	3630.0
25°	1260.6	1503.0	1903.4	2303.3	2870.6	3437.4	4025.3
27.5°	1147.2	1411.6	1887.0	2361.9	3072.2	3782.4	4455.2
30°	1046.4	1315.5	1867.3	2419.1	3266.2	4112.9	4791.3
32.5°	959.2	1221.7	1829.3	2436.4	3401.7	4367.0	5075.9
35°	890.8	1148.6	1765.6	2382.5	3486.6	4590.7	5372.2
37.5°	831.7	1075.0	1692.9	2310.8	3562.1	4813.3	5705.5
40°	775.4	996.2	1630.5	2264.4	3666.1	5067.9	6057.6
42.5°	722.0	931.5	1580.4	2229.2	3762.7	5295.7	6365.6
45°	682.1	881.8	1535.8	2189.4	3825.1	5460.8	6597.7
47.5°	662.4	852.3	1511.9	2171.1	3887.4	5603.3	6790.3
50°	659.6	847.2	1539.1	2231.1	4022.4	5813.3	7010.7
52.5°	659.2	855.6	1617.4	2379.2	4273.3	6166.8	7249.3
55°	649.3	860.7	1710.7	2560.2	4609.9	6659.1	7678.3
57.5°	619.3	842.9	1806.8	2770.2	4965.7	7160.7	8161.6
60°	572.9	799.8	1886.0	2971.8	5204.8	7437.3	8347.7
62.5°	514.8	724.3	1912.3	3099.8	5198.2	7296.7	8160.2
65°	465.1	645.1	1826.0	3006.5	4935.2	6863.5	7789.4
67.5°	421.0	565.9	1610.4	2654.4	4462.2	6269.5	7317.8
70°	389.1	513.8	1332.4	2150.9	3870.1	5588.8	6771.6
72.5°	369.0	489.0	1086.2	1683.1	3140.6	4597.7	5792.2
75°	341.3	450.1	852.3	1254.1	2403.6	3553.2	4375.0
77.5°	289.7	379.3	642.3	905.3	1763.7	2621.6	3042.6
80°	223.6	293.0	441.6	590.2	1213.8	1837.3	2074.5
82.5°	159.4	204.4	267.7	331.0	806.4	1281.3	1301.0
85°	98.5	119.1	153.3	187.5	533.5	879.5	732.8
87.5°	53.0	63.3	81.1	98.5	170.6	242.8	139.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P362160  
 CATALOG NUMBER: NVN-SA2D-727-U-SLL

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-2008: Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGRAW-EDISON

Report Number: SP1-1908-441-1-R4

Test Date: 08/20/2019

Luminaire Tested: SA1C-727-U-5WQ

**Test Information**

Test Method: LM-79-2008  
 Report Number: SP1-1908-441-1-R4  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 10/28/2024  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: McGRAW-EDISON  
 Catalog Number: **SA1C-727-U-5WQ**  
 Description: McGRAW EDISON ROADWAY AND AREA LUMINAIRE

\*\*\*THIS IS A REVISION OF SP1-1908-441-1-R3. TO UPDATE THE CATALOG NUMBER.\*\*\*TESTED IN  
 SITU. (1) 70 CRI, 2700K, 1050MA LIGHTSQUARE WITH 16 LEDS AND TYPE V WIDE OPTICS.

**Spectral Parameters**

CCT (K): 2741  
 CIE u': 0.2605  
 CIE v': 0.5272  
 Duv: 0.0005  
 CIE x: 0.4573  
 CIE y: 0.4113  
 CIE z: 0.1313  
 Peak Wavelength (nm): 602  
 Dominant Wavelength (nm): 583  
 Purity: 61.2  
 Rf: 69.9  
 Rg: 98.3

CRI (Ra):	71.5		
R1:	69.2	R9:	-16.1
R2:	79.4	R10:	51.4
R3:	87.8	R11:	63.1
R4:	69.4	R12:	42.0
R5:	66.4	R13:	70.2
R6:	69.8	R14:	92.4
R7:	79.8		
R8:	50.1		



**Test Conditions**

Stabilization Time: 56M  
 Operation Time: 12H  
 Room Temperature (°C) / RH%: 25.3./42%  
 Sphere Temperature (°C): 25.7

REPORT NUMBER: SP1-1908-441-1-R4


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/28/2019	12/28/2019
Power Meter	IN0071	12/5/2018	12/5/2019
AC Power Source	IN0063	12/5/2018	12/5/2019
DC Power Source	IN0208	12/5/2018	12/5/2019
Sphere Thermometer	IN0085	12/5/2018	12/5/2019
Room Thermometer	IN0046	12/5/2018	12/5/2019

REPORT NUMBER: SP1-1908-441-1-R4

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

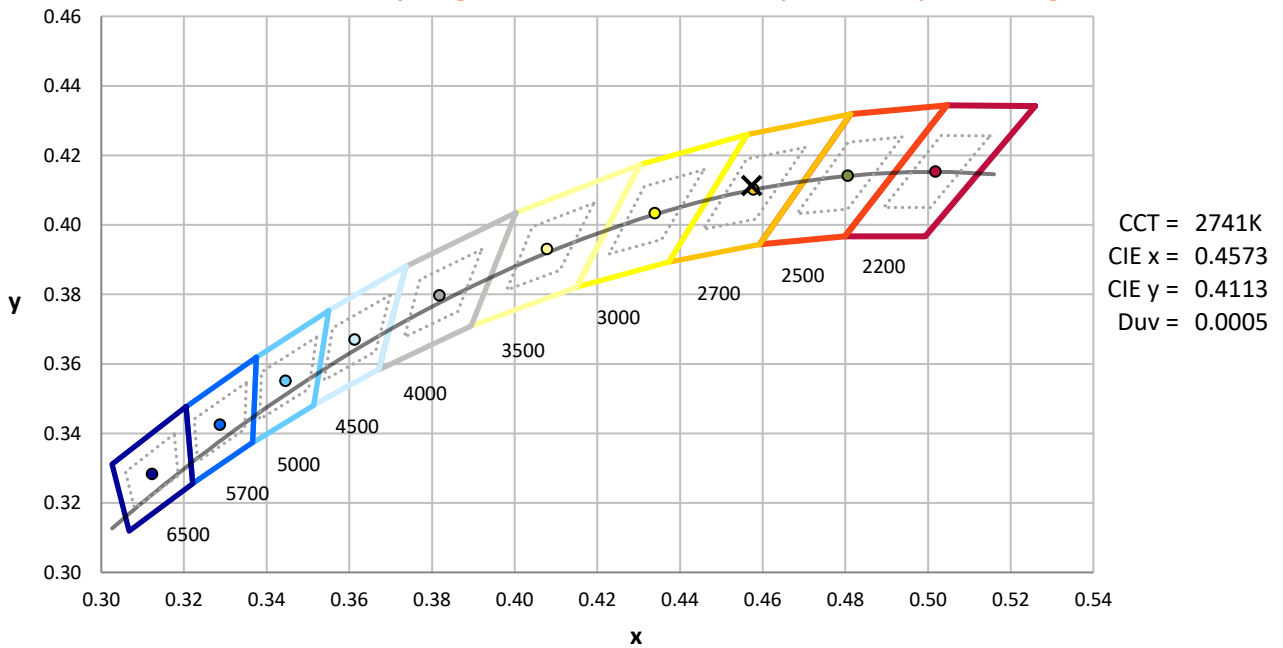

Point lies inside the ANSI 2700K 4-step quadrangle



REPORT NUMBER: SP1-1908-441-1-R4

**Photopic Flux vs. Wavelength**



**Photopic Lumens: 6211.7**

$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )	$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )	$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )	$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )	$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )
360	2044	0.0	490	7179	1.0	620	118034	30.7	750	8362	0.0	880	3128	0.0
365	2016	0.0	495	10476	1.9	625	111884	24.7	755	7635	0.0	885	3110	0.0
370	2020	0.0	500	15549	3.4	630	106119	19.2	760	6582	0.0	890	2632	0.0
375	2137	0.0	505	22477	6.3	635	99706	15.0	765	5777	0.0	895	2709	0.0
380	2046	0.0	510	30417	10.4	640	92142	11.0	770	5474	0.0	900	2016	0.0
385	1925	0.0	515	39274	16.3	645	84987	8.2	775	4977	0.0	905	1748	0.0
390	1893	0.0	520	47282	22.9	650	78016	5.7	780	4723	0.0	910	2046	0.0
395	1695	0.0	525	55413	29.7	655	71541	4.1	785	4219	0.0	915	1844	0.0
400	1633	0.0	530	62377	36.7	660	64863	2.7	790	3969	0.0	920	2734	0.0
405	2065	0.0	535	68520	42.5	665	58485	1.9	795	4122	0.0	925	2307	0.0
410	3449	0.0	540	73435	47.8	670	51641	1.1	800	2864	0.0	930	2039	0.0
415	7117	0.0	545	78677	52.4	675	46030	0.8	805	3151	0.0	935	1784	0.0
420	13992	0.0	550	83331	56.6	680	40590	0.5	810	3022	0.0	940	2464	0.0
425	25176	0.1	555	89120	60.9	685	35691	0.3	815	3471	0.0	945	2794	0.0
430	38151	0.3	560	94613	64.3	690	31631	0.2	820	2749	0.0	950	3090	0.0
435	49673	0.6	565	99818	66.4	695	27437	0.1	825	2729	0.0	955	1866	0.0
440	57273	0.9	570	106526	69.3	700	24589	0.1	830	2282	0.0	960	3110	0.0
445	54802	1.1	575	111610	69.4	705	21832	0.0	835	3140	0.0	965	3880	0.0
450	39184	1.0	580	117163	69.6	710	19500	0.0	840	2365	0.0	970	3243	0.0
455	22506	0.8	585	122201	67.9	715	17870	0.0	845	3024	0.0	975	2014	0.0
460	13692	0.6	590	125662	65.0	720	15924	0.0	850	2510	0.0	980	1688	0.0
465	9446	0.5	595	127415	60.4	725	14268	0.0	855	2739	0.0	985	2827	0.0
470	6698	0.4	600	129155	55.7	730	12438	0.0	860	3515	0.0	990	4172	0.0
475	5328	0.4	605	128057	49.6	735	11255	0.0	865	3600	0.0	995	3177	0.0
480	5081	0.5	610	126031	43.3	740	9951	0.0	870	3609	0.0	1000	3241	0.0
485	5579	0.7	615	123059	37.1	745	8870	0.0	875	3208	0.0			

REPORT NUMBER: SP1-1908-441-1-R4

Scotopic Flux vs. Wavelength



Scotopic Lumens: 6474.3

S/P: 1.04

λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	2044	0.0	490	7179	6.0	620	118034	0.1	750	8362	0.0	880	3128	0.0
365	2016	0.0	495	10476	8.6	625	111884	0.1	755	7635	0.0	885	3110	0.0
370	2020	0.0	500	15549	12.5	630	106119	0.0	760	6582	0.0	890	2632	0.0
375	2137	0.0	505	22477	17.3	635	99706	0.0	765	5777	0.0	895	2709	0.0
380	2046	0.0	510	30417	21.8	640	92142	0.0	770	5474	0.0	900	2016	0.0
385	1925	0.0	515	39274	25.7	645	84987	0.0	775	4977	0.0	905	1748	0.0
390	1893	0.0	520	47282	27.5	650	78016	0.0	780	4723	0.0	910	2046	0.0
395	1695	0.0	525	55413	28.1	655	71541	0.0	785	4219	0.0	915	1844	0.0
400	1633	0.0	530	62377	27.0	660	64863	0.0	790	3969	0.0	920	2734	0.0
405	2065	0.0	535	68520	24.7	665	58485	0.0	795	4122	0.0	925	2307	0.0
410	3449	0.1	540	73435	21.5	670	51641	0.0	800	2864	0.0	930	2039	0.0
415	7117	0.5	545	78677	18.3	675	46030	0.0	805	3151	0.0	935	1784	0.0
420	13992	1.6	550	83331	15.0	680	40590	0.0	810	3022	0.0	940	2464	0.0
425	25176	3.9	555	89120	12.0	685	35691	0.0	815	3471	0.0	945	2794	0.0
430	38151	8.1	560	94613	9.3	690	31631	0.0	820	2749	0.0	950	3090	0.0
435	49673	13.3	565	99818	7.0	695	27437	0.0	825	2729	0.0	955	1866	0.0
440	57273	19.1	570	106526	5.2	700	24589	0.0	830	2282	0.0	960	3110	0.0
445	54802	21.6	575	111610	3.7	705	21832	0.0	835	3140	0.0	965	3880	0.0
450	39184	18.1	580	117163	2.6	710	19500	0.0	840	2365	0.0	970	3243	0.0
455	22506	11.8	585	122201	1.8	715	17870	0.0	845	3024	0.0	975	2014	0.0
460	13692	8.1	590	125662	1.2	720	15924	0.0	850	2510	0.0	980	1688	0.0
465	9446	6.2	595	127415	0.8	725	14268	0.0	855	2739	0.0	985	2827	0.0
470	6698	4.8	600	129155	0.5	730	12438	0.0	860	3515	0.0	990	4172	0.0
475	5328	4.1	605	128057	0.4	735	11255	0.0	865	3600	0.0	995	3177	0.0
480	5081	4.1	610	126031	0.2	740	9951	0.0	870	3609	0.0	1000	3241	0.0
485	5579	4.6	615	123059	0.1	745	8870	0.0	875	3208	0.0			

REPORT NUMBER: SP1-1908-441-1-R4

Melanopic Flux vs. Wavelength



Melanopic Lumens: 2145.7 M/P: 0.35


$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )	$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )	$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )	$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )	$\lambda$ (nm)	Power ( $\mu\text{W}/\text{nm}$ )	Lumens ( $\phi/\text{nm}$ )
360	2044	0.0	490	7179	11.1	620	118034	1.5	750	8362	0.0	880	3128	0.0
365	2016	0.0	495	10476	16.9	625	111884	0.9	755	7635	0.0	885	3110	0.0
370	2020	0.0	500	15549	26.0	630	106119	0.6	760	6582	0.0	890	2632	0.0
375	2137	0.0	505	22477	38.2	635	99706	0.4	765	5777	0.0	895	2709	0.0
380	2046	0.0	510	30417	51.6	640	92142	0.2	770	5474	0.0	900	2016	0.0
385	1925	0.0	515	39274	65.1	645	84987	0.1	775	4977	0.0	905	1748	0.0
390	1893	0.0	520	47282	75.2	650	78016	0.1	780	4723	0.0	910	2046	0.0
395	1695	0.0	525	55413	82.9	655	71541	0.1	785	4219	0.0	915	1844	0.0
400	1633	0.0	530	62377	86.0	660	64863	0.0	790	3969	0.0	920	2734	0.0
405	2065	0.1	535	68520	85.4	665	58485	0.0	795	4122	0.0	925	2307	0.0
410	3449	0.2	540	73435	81.1	670	51641	0.0	800	2864	0.0	930	2039	0.0
415	7117	0.7	545	78677	75.4	675	46030	0.0	805	3151	0.0	935	1784	0.0
420	13992	2.3	550	83331	68.1	680	40590	0.0	810	3022	0.0	940	2464	0.0
425	25176	6.2	555	89120	60.9	685	35691	0.0	815	3471	0.0	945	2794	0.0
430	38151	13.0	560	94613	52.9	690	31631	0.0	820	2749	0.0	950	3090	0.0
435	49673	22.2	565	99818	44.8	695	27437	0.0	825	2729	0.0	955	1866	0.0
440	57273	32.0	570	106526	37.6	700	24589	0.0	830	2282	0.0	960	3110	0.0
445	54802	36.7	575	111610	30.4	705	21832	0.0	835	3140	0.0	965	3880	0.0
450	39184	30.4	580	117163	24.1	710	19500	0.0	840	2365	0.0	970	3243	0.0
455	22506	19.7	585	122201	18.7	715	17870	0.0	845	3024	0.0	975	2014	0.0
460	13692	13.2	590	125662	14.0	720	15924	0.0	850	2510	0.0	980	1688	0.0
465	9446	10.0	595	127415	10.2	725	14268	0.0	855	2739	0.0	985	2827	0.0
470	6698	7.7	600	129155	7.3	730	12438	0.0	860	3515	0.0	990	4172	0.0
475	5328	6.7	605	128057	5.0	735	11255	0.0	865	3600	0.0	995	3177	0.0
480	5081	6.9	610	126031	3.4	740	9951	0.0	870	3609	0.0	1000	3241	0.0
485	5579	8.1	615	123059	2.3	745	8870	0.0	875	3208	0.0			

REPORT NUMBER: SP1-1908-441-1-R4




TM-30-18

**Summary**

$R_f = 69.9$   
 $R_g = 98.3$   
 CIE  $R_a = 71.5$   
 $R_g = -16.1$

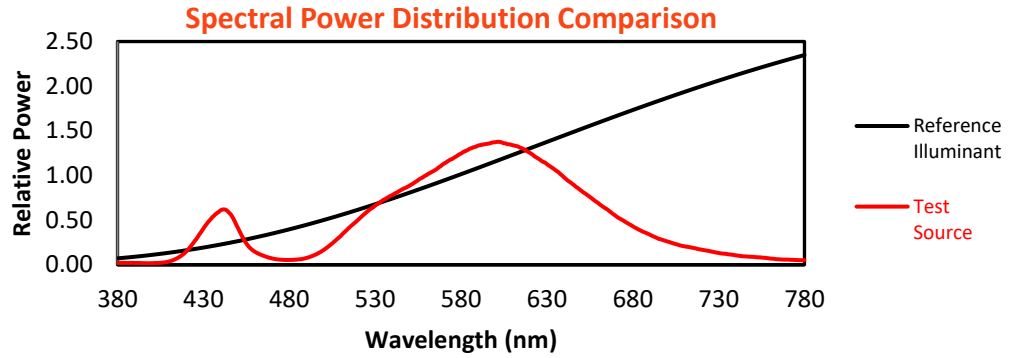

**Color Vector Graphics**

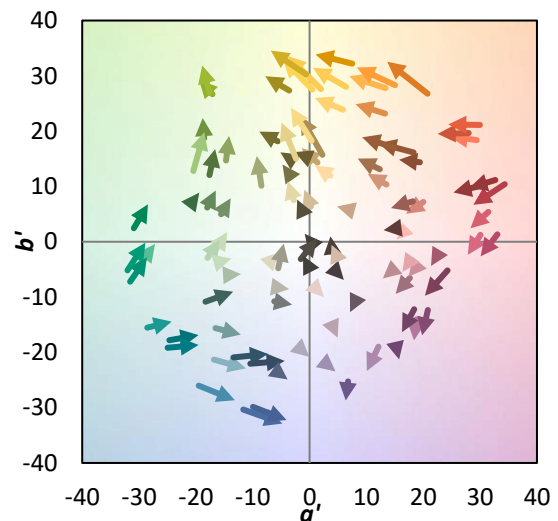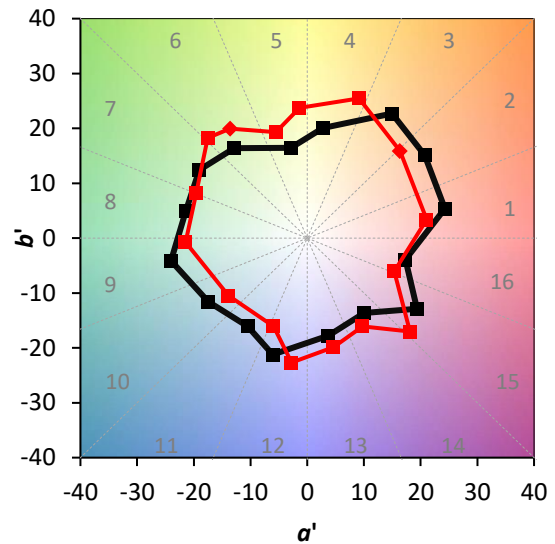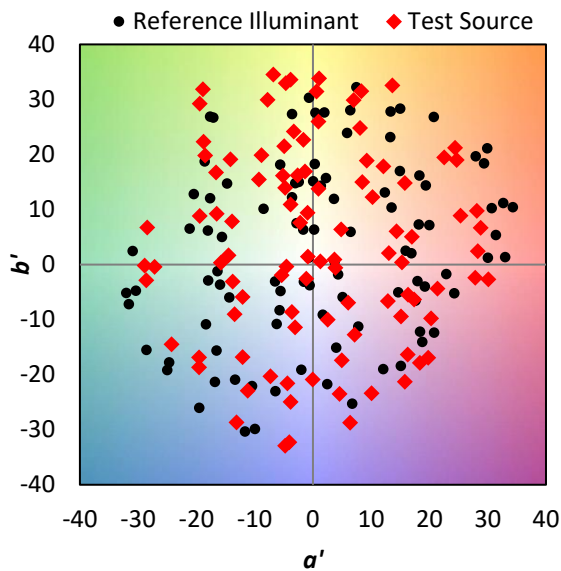

REPORT NUMBER: SP1-1908-441-1-R4

TM-30-18

**Individual Sample Fidelity Index ( $R_{f,i}$ )**


CES01 = 86	CES26 = 54	CES51 = 77	CES76 = 48
CES02 = 63	CES27 = 74	CES52 = 80	CES77 = 75
CES03 = 31	CES28 = 80	CES53 = 66	CES78 = 56
CES04 = 71	CES29 = 44	CES54 = 77	CES79 = 81
CES05 = 50	CES30 = 46	CES55 = 74	CES80 = 80
CES06 = 52	CES31 = 50	CES56 = 63	CES81 = 73
CES07 = 42	CES32 = 49	CES57 = 60	CES82 = 91
CES08 = 41	CES33 = 53	CES58 = 63	CES83 = 84
CES09 = 29	CES34 = 66	CES59 = 85	CES84 = 90
CES10 = 77	CES35 = 82	CES60 = 89	CES85 = 87
CES11 = 60	CES36 = 78	CES61 = 85	CES86 = 65
CES12 = 66	CES37 = 75	CES62 = 69	CES87 = 78
CES13 = 43	CES38 = 53	CES63 = 68	CES88 = 73
CES14 = 74	CES39 = 91	CES64 = 68	CES89 = 68
CES15 = 71	CES40 = 85	CES65 = 65	CES90 = 68
CES16 = 48	CES41 = 76	CES66 = 62	CES91 = 91
CES17 = 50	CES42 = 76	CES67 = 60	CES92 = 71
CES18 = 57	CES43 = 65	CES68 = 68	CES93 = 82
CES19 = 73	CES44 = 98	CES69 = 77	CES94 = 57
CES20 = 67	CES45 = 75	CES70 = 60	CES95 = 78
CES21 = 88	CES46 = 70	CES71 = 57	CES96 = 80
CES22 = 80	CES47 = 63	CES72 = 86	CES97 = 79
CES23 = 92	CES48 = 51	CES73 = 52	CES98 = 71
CES24 = 91	CES49 = 68	CES74 = 90	CES99 = 64
CES25 = 73	CES50 = 77	CES75 = 58	



REPORT NUMBER: SP1-1908-441-1-R4

TM-30-18

Color Rendition by Hue-Angle Bin

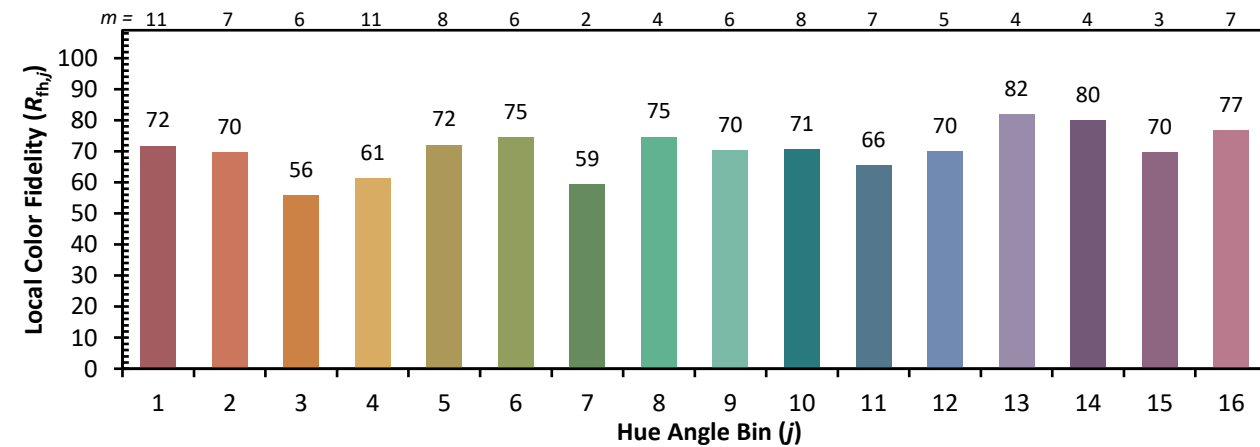

REPORT NUMBER: SP1-1908-441-1-R4

TM-30-18

Measure Comparisons



(END OF REPORT)