

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P963418

Luminaire Tested: **NVN-SB3A-722-U-SLR**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P963418
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: NVN-SB3A-722-U-SLR
Description: NAVION ROADWAY AND AREA HIGH DENSITY LED LUMINAIRE
(3) 70 CRI, 2200K, 350mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT
ELIMINATOR RIGHT OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11354.9 lumens
Efficiency: N/A
Efficacy: 134.1 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B2 - U0 - G3


Input Watts (W): 84.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

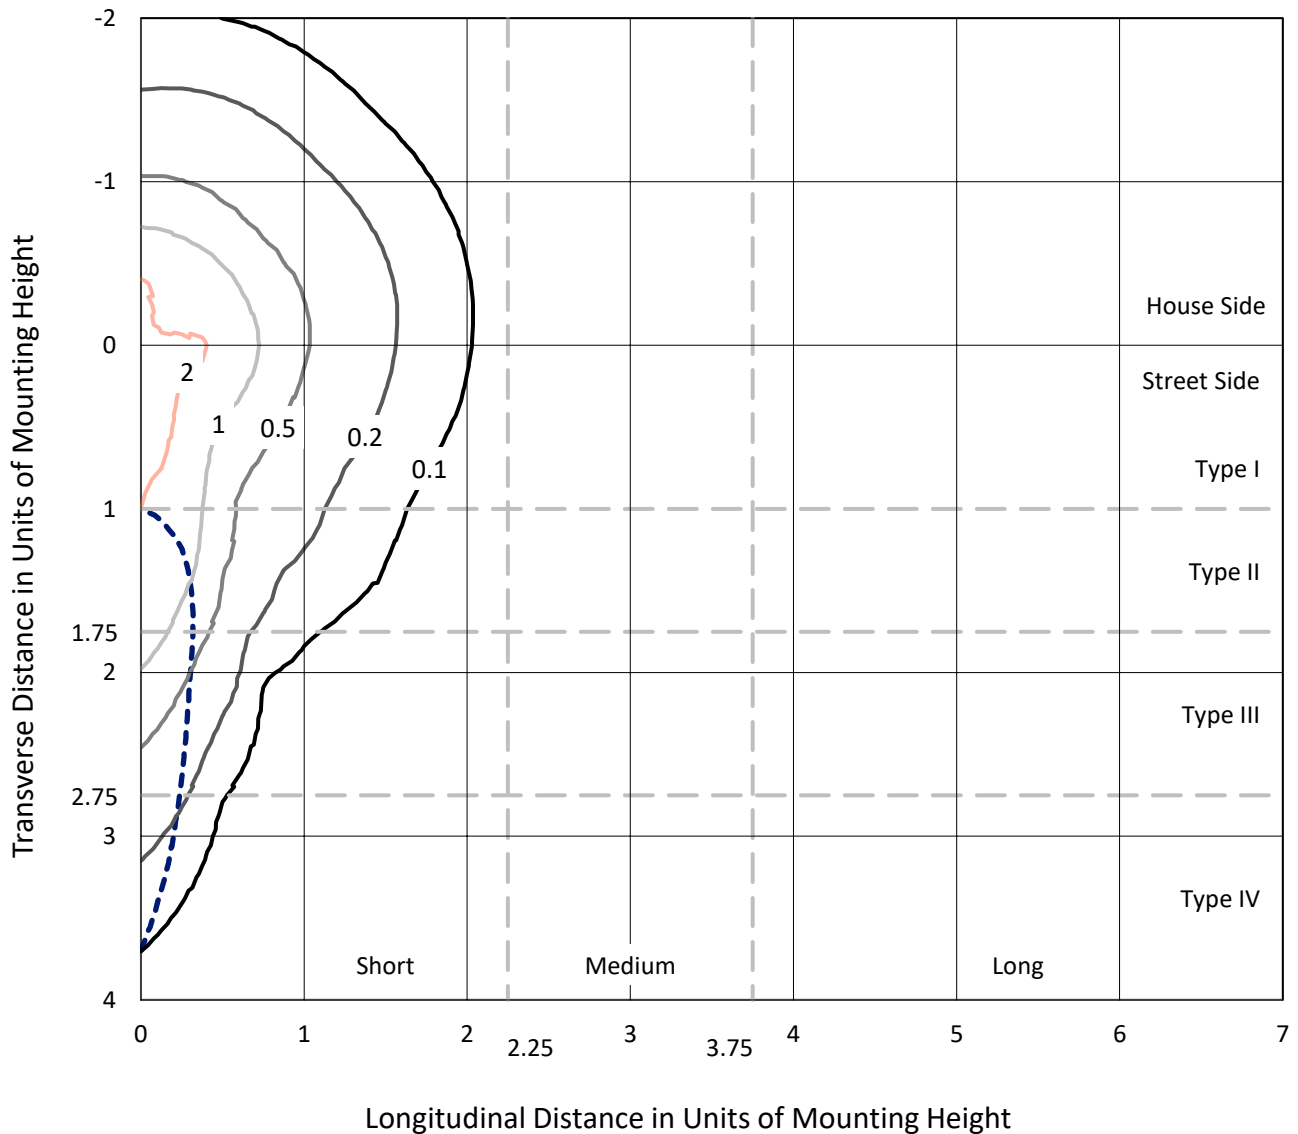

Based on 25 foot mounting height. Maximum calculated value = 3.1 fc
 Type IV - Short - N/A

REPORT NUMBER: P963418
CATALOG NUMBER: NVN-SB3A-722-U-SLR

Luminous Intensity Polar Plot

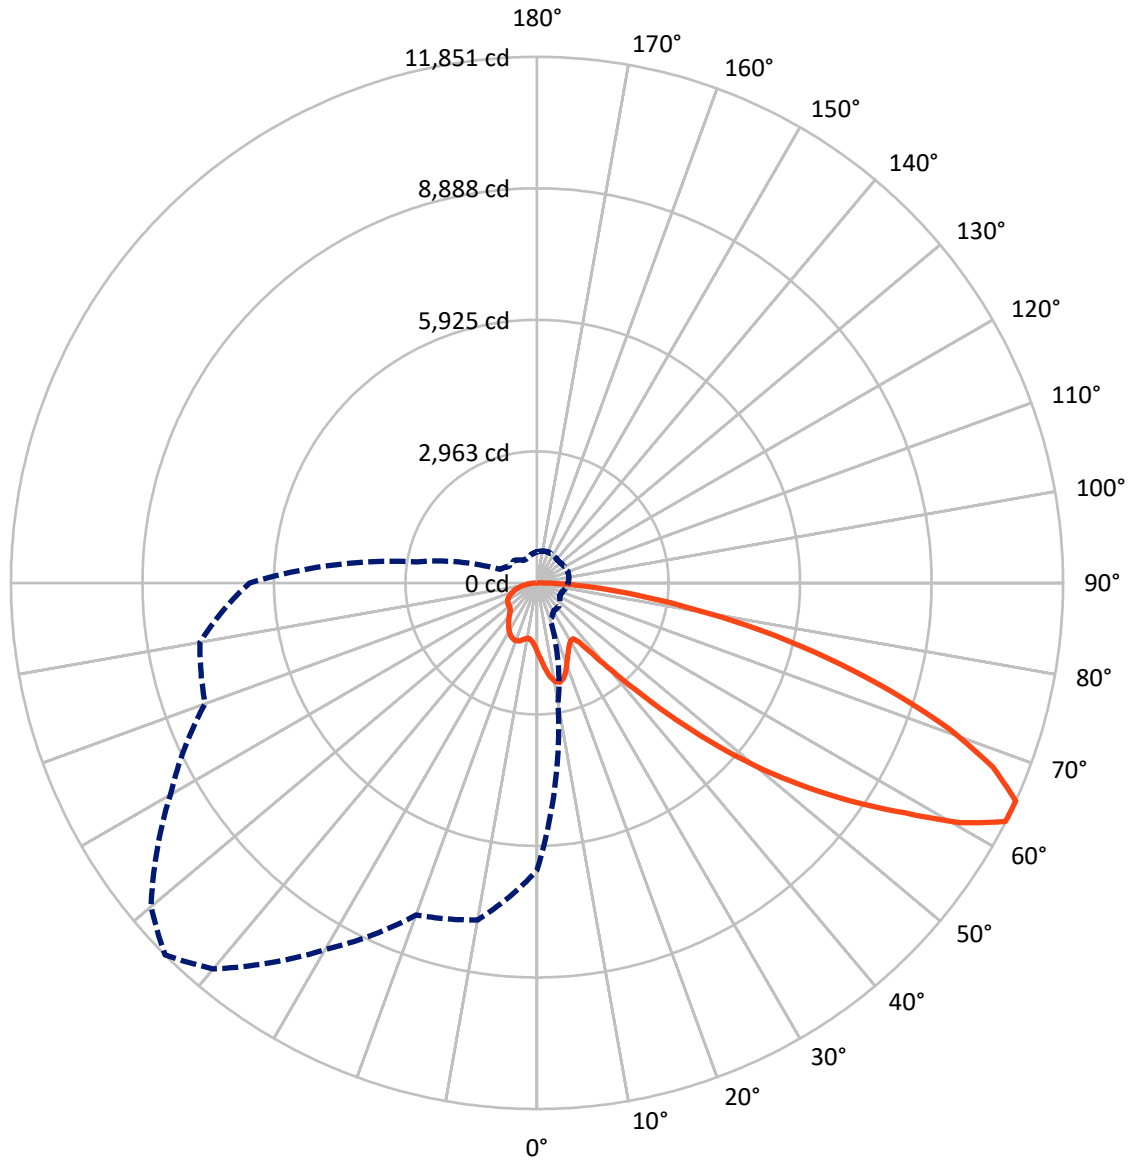

— Vertical Plane Through 315-Deg Lateral - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2885.9	0.0	2885.9
	% Fixture	25.4	0.0	25.4
Street Side	Lumens	8469.1	0.0	8469.1
	% Fixture	74.6	0.0	74.6
Total	Lumens	11354.9	0.0	11354.9
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.9	1.4
10°-20°	486.2	4.3
20°-30°	751.1	6.6
30°-40°	951.8	8.4
40°-50°	1435.5	12.6
50°-60°	2319.3	20.4
60°-70°	2891.4	25.5
70°-80°	1896.0	16.7
80°-90°	468.7	4.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	11354.9	100.0
0°-180°	11354.9	100.0

Coefficient of Utilization

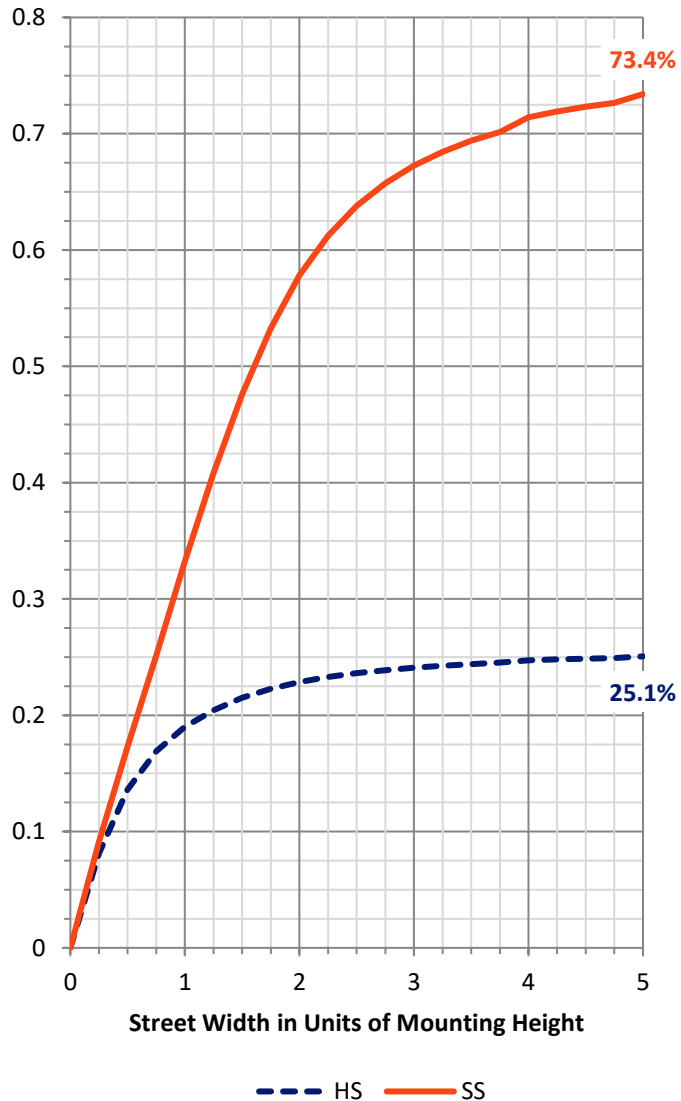


REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	763.8	6.7			
FM (30°-60°)	3312.0	29.2			
FH (60°-80°)	4007.2	35.3			G2/5000
FVH (80°-90°)	386.1	3.4			G3/500
BL (0°-30°)	628.4	5.5	B2/1000		
BM (30°-60°)	1394.6	12.3	B2/2500		
BH (60°-80°)	780.2	6.9	B2/1000		G2/1000
BVH (80°-90°)	82.6	0.7			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G3

Type IV Short

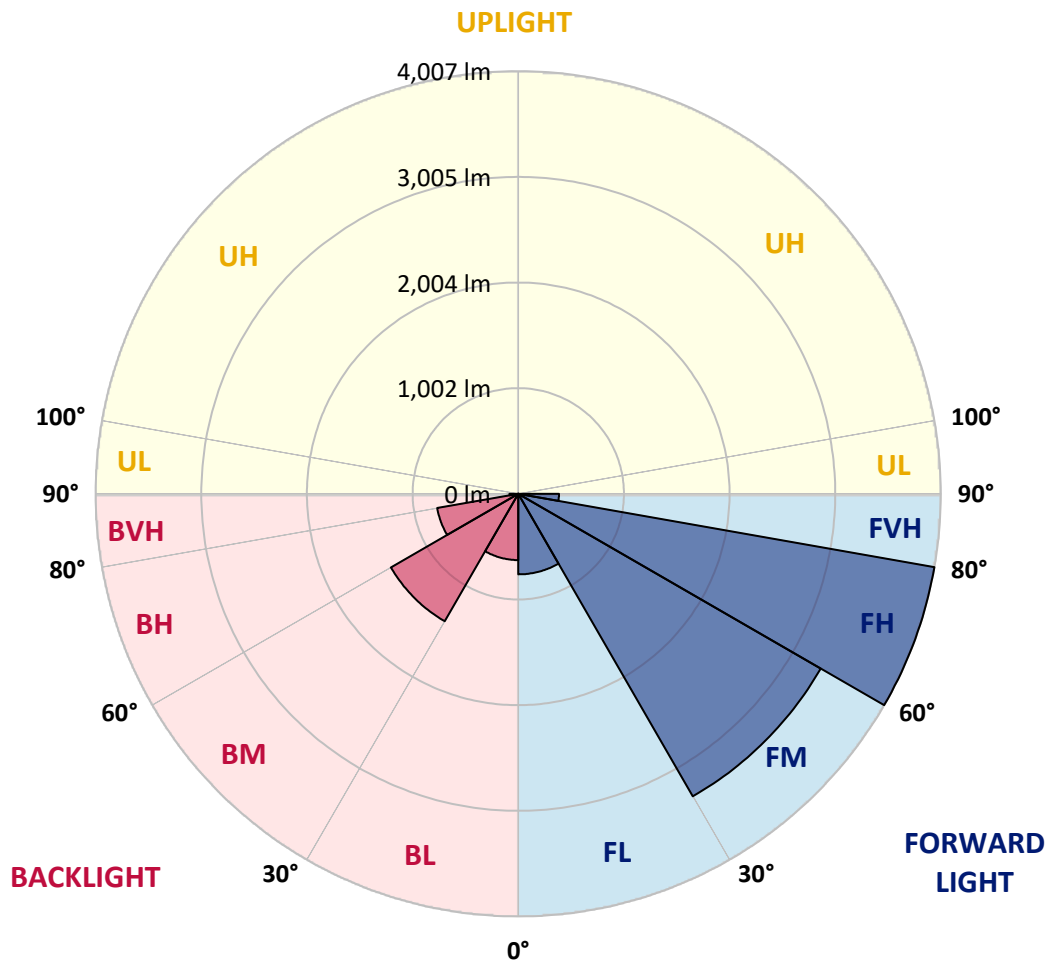

REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4
2.5°	1679.2	1666.2	1653.3	1639.7	1626.0	1612.2	1598.4	1585.3	1572.0	1559.3	1545.1
5°	1805.5	1777.1	1748.6	1720.3	1691.9	1663.4	1634.8	1608.1	1581.5	1556.4	1531.5
7.5°	1932.5	1885.6	1838.6	1795.3	1751.9	1709.7	1667.5	1630.3	1593.1	1558.7	1526.5
10°	2029.9	1970.6	1911.2	1853.8	1796.6	1745.3	1693.9	1649.9	1605.9	1563.5	1528.9
12.5°	2089.6	2024.3	1959.1	1894.2	1829.2	1768.7	1708.2	1658.4	1608.6	1564.1	1532.0
15°	2125.8	2057.8	1989.8	1919.3	1848.9	1779.2	1709.5	1651.9	1594.3	1544.9	1519.2
17.5°	2146.1	2077.3	2008.3	1931.4	1854.5	1773.7	1692.8	1623.4	1554.1	1496.1	1480.2
20°	2168.7	2096.9	2025.3	1940.8	1856.3	1758.3	1660.3	1574.3	1488.4	1420.9	1416.8
22.5°	2194.7	2121.5	2048.3	1953.4	1858.7	1739.4	1620.2	1516.8	1413.3	1336.4	1344.6
25°	2228.2	2156.5	2084.7	1976.5	1868.2	1720.9	1573.7	1452.5	1331.4	1252.6	1274.7
27.5°	2273.8	2205.4	2136.9	2012.5	1887.9	1708.5	1529.1	1393.7	1258.4	1186.6	1213.6
30°	2335.3	2269.0	2202.9	2059.0	1915.0	1702.7	1490.2	1344.6	1198.9	1138.7	1159.9
32.5°	2407.7	2342.2	2276.8	2107.6	1938.4	1695.5	1452.5	1302.2	1151.9	1103.3	1112.7
35°	2495.8	2433.1	2370.4	2163.0	1955.5	1681.9	1408.5	1260.5	1112.6	1072.1	1068.3
37.5°	2644.1	2564.1	2484.2	2225.0	1965.7	1658.8	1351.8	1211.6	1071.3	1036.0	1021.7
40°	2868.2	2751.7	2635.2	2303.7	1972.1	1626.9	1281.6	1153.1	1024.6	992.5	970.7
42.5°	3165.3	2997.2	2829.1	2406.7	1984.3	1593.9	1203.6	1088.6	973.5	943.9	916.5
45°	3532.4	3305.5	3078.8	2542.2	2005.7	1563.2	1120.9	1020.0	919.1	889.2	862.5
47.5°	3991.2	3672.2	3352.9	2686.6	2020.4	1538.0	1055.5	965.8	876.0	837.3	814.4
50°	4592.8	4111.7	3630.4	2820.6	2010.7	1510.4	1010.0	929.8	849.5	798.7	772.0
52.5°	5283.4	4573.3	3863.3	2907.6	1951.8	1463.9	976.0	906.0	836.1	777.7	740.5
55°	6018.5	4982.7	3947.0	2888.4	1829.8	1386.7	943.5	888.9	834.1	779.8	723.6
57.5°	6687.2	5272.8	3858.4	2753.5	1648.6	1277.9	907.1	868.5	829.8	781.9	713.6
60°	7091.4	5345.3	3599.3	2502.3	1405.5	1136.6	867.7	837.3	807.0	775.3	704.2
62.5°	6886.2	5040.0	3194.0	2162.9	1131.7	967.5	803.4	783.2	763.0	759.1	693.1
65°	6475.4	4608.1	2740.8	1816.4	892.1	815.4	738.7	729.2	719.8	720.2	669.8
67.5°	5925.1	4094.1	2263.1	1477.0	691.0	669.2	647.4	652.7	657.9	656.7	628.4
70°	5263.9	3533.3	1802.6	1163.0	523.4	529.6	535.8	560.5	585.1	585.1	575.7
72.5°	4476.0	2925.2	1374.4	889.1	403.7	422.5	441.3	476.3	511.2	517.1	517.2
75°	3479.3	2228.2	977.1	645.3	313.4	330.5	347.5	386.7	425.9	452.9	450.7
77.5°	2485.9	1559.5	633.1	437.3	241.4	252.9	264.6	302.6	340.6	385.3	384.1
80°	1627.0	1004.8	382.5	281.8	180.9	185.7	190.5	222.7	254.9	308.2	308.1
82.5°	945.8	581.6	217.4	173.2	129.3	130.2	131.1	154.8	178.6	224.1	226.6
85°	416.2	261.6	107.1	92.7	78.2	77.8	77.3	94.7	112.0	145.9	149.2
87.5°	128.8	85.7	42.5	38.4	34.2	33.8	33.4	40.5	47.7	61.7	65.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4
2.5°	1533.6	1522.1	1511.8	1501.5	1492.4	1483.4	1474.3	1465.2	1458.3	1451.2	1445.5
5°	1509.7	1488.0	1469.7	1451.6	1435.6	1419.5	1405.0	1390.3	1379.1	1367.9	1360.1
7.5°	1497.6	1468.8	1444.8	1420.9	1400.7	1380.5	1362.6	1344.8	1331.5	1318.1	1308.8
10°	1498.4	1468.0	1444.1	1420.1	1398.4	1376.6	1356.5	1336.4	1320.5	1304.5	1294.1
12.5°	1507.0	1482.1	1466.3	1450.5	1433.3	1416.2	1395.5	1374.7	1354.4	1334.0	1320.5
15°	1507.3	1495.4	1497.5	1499.7	1495.3	1490.9	1472.8	1454.8	1425.8	1396.8	1376.3
17.5°	1484.6	1488.9	1515.1	1541.2	1555.0	1568.9	1554.3	1539.9	1501.4	1463.0	1432.8
20°	1437.0	1457.4	1502.9	1548.3	1577.3	1606.4	1599.6	1592.8	1549.0	1505.1	1468.0
22.5°	1374.7	1404.9	1456.6	1508.6	1546.3	1584.1	1588.2	1592.2	1550.3	1508.4	1470.3
25°	1309.4	1344.2	1390.7	1437.4	1474.6	1511.8	1525.7	1539.6	1505.1	1470.8	1436.9
27.5°	1247.1	1280.7	1319.0	1357.2	1387.0	1416.9	1432.3	1447.8	1423.3	1398.9	1372.6
30°	1186.4	1213.2	1245.0	1276.6	1301.4	1326.2	1338.9	1351.4	1332.8	1314.0	1295.3
32.5°	1128.5	1144.3	1169.6	1195.0	1218.7	1242.5	1256.4	1270.5	1253.4	1236.1	1221.2
35°	1072.6	1077.0	1096.3	1115.6	1139.1	1162.7	1179.5	1196.2	1184.0	1171.9	1157.9
37.5°	1016.9	1012.1	1026.0	1039.9	1063.2	1086.7	1107.5	1128.2	1122.6	1116.9	1104.2
40°	959.8	948.9	959.0	968.9	991.6	1014.2	1038.1	1062.0	1063.3	1064.7	1053.9
42.5°	902.0	887.6	895.8	904.0	925.5	947.0	972.7	998.5	1005.4	1012.3	1003.1
45°	848.5	834.6	841.3	848.3	868.7	889.0	915.7	942.5	952.3	962.3	954.0
47.5°	802.7	790.9	797.3	803.8	823.7	843.6	870.0	896.4	907.7	919.1	913.4
50°	761.6	751.2	761.3	771.4	790.3	809.0	832.6	856.2	870.8	885.4	885.1
52.5°	730.1	719.9	735.0	750.1	767.4	784.6	806.6	828.6	845.9	863.3	866.3
55°	707.4	691.2	712.7	734.1	752.7	771.2	790.5	809.7	828.1	846.4	850.9
57.5°	689.8	666.1	689.3	712.4	734.2	756.0	775.1	794.2	812.7	831.2	835.5
60°	673.4	642.6	662.9	683.2	708.2	733.3	752.6	772.0	790.6	809.1	814.0
62.5°	654.7	616.2	629.1	642.0	671.2	700.4	721.1	741.8	758.8	775.8	780.4
65°	629.0	588.0	593.1	598.0	629.2	660.6	680.3	700.1	715.1	730.1	734.8
67.5°	594.4	560.4	558.7	557.2	586.1	615.0	633.8	652.5	665.4	678.3	683.0
70°	551.6	527.4	522.0	516.6	542.0	567.4	583.5	599.7	611.4	623.1	627.6
72.5°	500.6	484.0	476.1	468.2	488.2	508.2	522.9	537.4	548.9	560.4	565.6
75°	437.9	425.1	417.6	409.9	424.8	439.6	452.9	466.2	476.5	487.0	492.5
77.5°	373.8	363.6	355.9	348.2	360.3	372.4	383.8	395.1	406.1	417.0	422.2
80°	299.5	290.9	284.4	278.0	288.0	298.1	307.7	317.2	325.5	333.8	340.7
82.5°	222.4	218.2	213.6	209.1	208.3	207.5	204.1	200.7	218.4	236.2	247.8
85°	144.7	140.2	135.1	130.0	125.7	121.4	112.0	102.7	119.3	136.0	150.4
87.5°	64.1	62.3	61.4	60.4	60.2	60.1	53.0	45.8	52.8	59.8	65.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4
2.5°	1439.8	1435.3	1430.9	1426.8	1422.7	1417.6	1422.7	1426.8	1430.9	1435.3	1439.8
5°	1352.2	1346.6	1341.0	1336.8	1332.5	1328.3	1332.5	1336.8	1341.0	1346.6	1352.2
7.5°	1299.5	1293.0	1286.7	1282.9	1279.1	1276.2	1279.1	1282.9	1286.7	1293.0	1299.5
10°	1283.5	1277.5	1271.4	1268.1	1265.0	1263.6	1265.0	1268.1	1271.4	1277.5	1283.5
12.5°	1307.1	1300.3	1293.6	1290.8	1288.1	1287.6	1288.1	1290.8	1293.6	1300.3	1307.1
15°	1355.8	1346.3	1337.0	1333.4	1329.8	1329.5	1329.8	1333.4	1337.0	1346.3	1355.8
17.5°	1402.6	1388.8	1374.7	1370.2	1365.6	1364.9	1365.6	1370.2	1374.7	1388.8	1402.6
20°	1431.1	1413.3	1395.4	1389.7	1384.1	1382.2	1384.1	1389.7	1395.4	1413.3	1431.1
22.5°	1432.1	1413.4	1394.5	1388.3	1381.9	1379.2	1381.9	1388.3	1394.5	1413.4	1432.1
25°	1403.1	1386.8	1370.5	1364.7	1358.7	1355.3	1358.7	1364.7	1370.5	1386.8	1403.1
27.5°	1346.3	1335.4	1324.4	1321.7	1319.1	1318.1	1319.1	1321.7	1324.4	1335.4	1346.3
30°	1276.3	1270.8	1265.2	1265.2	1265.2	1266.0	1265.2	1265.2	1265.2	1270.8	1276.3
32.5°	1206.1	1202.4	1198.8	1199.2	1199.8	1200.7	1199.8	1199.2	1198.8	1202.4	1206.1
35°	1144.1	1138.5	1133.0	1131.8	1130.6	1130.0	1130.6	1131.8	1133.0	1138.5	1144.1
37.5°	1091.3	1081.3	1071.1	1065.8	1060.5	1057.5	1060.5	1065.8	1071.1	1081.3	1091.3
40°	1043.0	1028.3	1013.6	1003.7	993.8	988.0	993.8	1003.7	1013.6	1028.3	1043.0
42.5°	994.0	975.7	957.5	943.0	928.5	919.1	928.5	943.0	957.5	975.7	994.0
45°	945.8	924.9	904.0	887.0	870.1	859.2	870.1	887.0	904.0	924.9	945.8
47.5°	907.6	889.0	870.4	854.7	839.2	828.6	839.2	854.7	870.4	889.0	907.6
50°	884.9	870.0	855.2	840.6	826.2	816.0	826.2	840.6	855.2	870.0	884.9
52.5°	869.5	857.4	845.3	832.3	819.4	810.1	819.4	832.3	845.3	857.4	869.5
55°	855.2	844.6	834.0	822.7	811.3	802.9	811.3	822.7	834.0	844.6	855.2
57.5°	839.9	829.2	818.6	807.3	796.0	787.3	796.0	807.3	818.6	829.2	839.9
60°	818.8	808.3	798.0	786.4	774.7	765.7	774.7	786.4	798.0	808.3	818.8
62.5°	785.0	775.6	766.2	754.0	741.8	730.9	741.8	754.0	766.2	775.6	785.0
65°	739.4	730.4	721.4	709.5	697.7	688.4	697.7	709.5	721.4	730.4	739.4
67.5°	687.6	679.2	671.0	659.9	648.9	640.5	648.9	659.9	671.0	679.2	687.6
70°	632.0	625.2	618.5	607.9	597.4	587.7	597.4	607.9	618.5	625.2	632.0
72.5°	570.9	565.3	559.6	549.5	539.6	530.2	539.6	549.5	559.6	565.3	570.9
75°	498.0	495.3	492.5	484.1	475.6	466.8	475.6	484.1	492.5	495.3	498.0
77.5°	427.3	423.5	419.5	411.0	402.5	395.4	402.5	411.0	419.5	423.5	427.3
80°	347.5	345.8	344.2	332.8	321.2	308.0	321.2	332.8	344.2	345.8	347.5
82.5°	259.4	258.7	257.9	248.3	238.6	230.1	238.6	248.3	257.9	258.7	259.4
85°	164.7	163.6	162.4	154.8	147.3	139.6	147.3	154.8	162.4	163.6	164.7
87.5°	71.4	70.0	68.5	64.6	60.7	56.9	60.7	64.6	68.5	70.0	71.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4
2.5°	1445.5	1451.2	1458.3	1465.2	1474.3	1483.4	1492.4	1501.5	1511.8	1522.1	1533.6
5°	1360.1	1367.9	1379.1	1390.3	1405.0	1419.5	1435.6	1451.6	1469.7	1488.0	1509.7
7.5°	1308.8	1318.1	1331.5	1344.8	1362.6	1380.5	1400.7	1420.9	1444.8	1468.8	1497.6
10°	1294.1	1304.5	1320.5	1336.4	1356.5	1376.6	1398.4	1420.1	1444.1	1468.0	1498.4
12.5°	1320.5	1334.0	1354.4	1374.7	1395.5	1416.2	1433.3	1450.5	1466.3	1482.1	1507.0
15°	1376.3	1396.8	1425.8	1454.8	1472.8	1490.9	1495.3	1499.7	1497.5	1495.4	1507.3
17.5°	1432.8	1463.0	1501.4	1539.9	1554.3	1568.9	1555.0	1541.2	1515.1	1488.9	1484.6
20°	1468.0	1505.1	1549.0	1592.8	1599.6	1606.4	1577.3	1548.3	1502.9	1457.4	1437.0
22.5°	1470.3	1508.4	1550.3	1592.2	1588.2	1584.1	1546.3	1508.6	1456.6	1404.9	1374.7
25°	1436.9	1470.8	1505.1	1539.6	1525.7	1511.8	1474.6	1437.4	1390.7	1344.2	1309.4
27.5°	1372.6	1398.9	1423.3	1447.8	1432.3	1416.9	1387.0	1357.2	1319.0	1280.7	1247.1
30°	1295.3	1314.0	1332.8	1351.4	1338.9	1326.2	1301.4	1276.6	1245.0	1213.2	1186.4
32.5°	1221.2	1236.1	1253.4	1270.5	1256.4	1242.5	1218.7	1195.0	1169.6	1144.3	1128.5
35°	1157.9	1171.9	1184.0	1196.2	1179.5	1162.7	1139.1	1115.6	1096.3	1077.0	1072.6
37.5°	1104.2	1116.9	1122.6	1128.2	1107.5	1086.7	1063.2	1039.9	1026.0	1012.1	1016.9
40°	1053.9	1064.7	1063.3	1062.0	1038.1	1014.2	991.6	968.9	959.0	948.9	959.8
42.5°	1003.1	1012.3	1005.4	998.5	972.7	947.0	925.5	904.0	895.8	887.6	902.0
45°	954.0	962.3	952.3	942.5	915.7	889.0	868.7	848.3	841.3	834.6	848.5
47.5°	913.4	919.1	907.7	896.4	870.0	843.6	823.7	803.8	797.3	790.9	802.7
50°	885.1	885.4	870.8	856.2	832.6	809.0	790.3	771.4	761.3	751.2	761.6
52.5°	866.3	863.3	845.9	828.6	806.6	784.6	767.4	750.1	735.0	719.9	730.1
55°	850.9	846.4	828.1	809.7	790.5	771.2	752.7	734.1	712.7	691.2	707.4
57.5°	835.5	831.2	812.7	794.2	775.1	756.0	734.2	712.4	689.3	666.1	689.8
60°	814.0	809.1	790.6	772.0	752.6	733.3	708.2	683.2	662.9	642.6	673.4
62.5°	780.4	775.8	758.8	741.8	721.1	700.4	671.2	642.0	629.1	616.2	654.7
65°	734.8	730.1	715.1	700.1	680.3	660.6	629.2	598.0	593.1	588.0	629.0
67.5°	683.0	678.3	665.4	652.5	633.8	615.0	586.1	557.2	558.7	560.4	594.4
70°	627.6	623.1	611.4	599.7	583.5	567.4	542.0	516.6	522.0	527.4	551.6
72.5°	565.6	560.4	548.9	537.4	522.9	508.2	488.2	468.2	476.1	484.0	500.6
75°	492.5	487.0	476.5	466.2	452.9	439.6	424.8	409.9	417.6	425.1	437.9
77.5°	422.2	417.0	406.1	395.1	383.8	372.4	360.3	348.2	355.9	363.6	373.8
80°	340.7	333.8	325.5	317.2	307.7	298.1	288.0	278.0	284.4	290.9	299.5
82.5°	247.8	236.2	218.4	200.7	204.1	207.5	208.3	209.1	213.6	218.2	222.4
85°	150.4	136.0	119.3	102.7	112.0	121.4	125.7	130.0	135.1	140.2	144.7
87.5°	65.6	59.8	52.8	45.8	53.0	60.1	60.2	60.4	61.4	62.3	64.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4
2.5°	1545.1	1559.3	1572.0	1585.3	1598.4	1612.2	1626.0	1639.7	1653.3	1666.2	1679.2
5°	1531.5	1556.4	1581.5	1608.1	1634.8	1663.4	1691.9	1720.3	1748.6	1777.1	1805.5
7.5°	1526.5	1558.7	1593.1	1630.3	1667.5	1709.7	1751.9	1795.3	1838.6	1885.6	1932.5
10°	1528.9	1563.5	1605.9	1649.9	1693.9	1745.3	1796.6	1853.8	1911.2	1970.6	2029.9
12.5°	1532.0	1564.1	1608.6	1658.4	1708.2	1768.7	1829.2	1894.2	1959.1	2024.3	2089.6
15°	1519.2	1544.9	1594.3	1651.9	1709.5	1779.2	1848.9	1919.3	1989.8	2057.8	2125.8
17.5°	1480.2	1496.1	1554.1	1623.4	1692.8	1773.7	1854.5	1931.4	2008.3	2077.3	2146.1
20°	1416.8	1420.9	1488.4	1574.3	1660.3	1758.3	1856.3	1940.8	2025.3	2096.9	2168.7
22.5°	1344.6	1336.4	1413.3	1516.8	1620.2	1739.4	1858.7	1953.4	2048.3	2121.5	2194.7
25°	1274.7	1252.6	1331.4	1452.5	1573.7	1720.9	1868.2	1976.5	2084.7	2156.5	2228.2
27.5°	1213.6	1186.6	1258.4	1393.7	1529.1	1708.5	1887.9	2012.5	2136.9	2205.4	2273.8
30°	1159.9	1138.7	1198.9	1344.6	1490.2	1702.7	1915.0	2059.0	2202.9	2269.0	2335.3
32.5°	1112.7	1103.3	1151.9	1302.2	1452.5	1695.5	1938.4	2107.6	2276.8	2342.2	2407.7
35°	1068.3	1072.1	1112.6	1260.5	1408.5	1681.9	1955.5	2163.0	2370.4	2433.1	2495.8
37.5°	1021.7	1036.0	1071.3	1211.6	1351.8	1658.8	1965.7	2225.0	2484.2	2564.1	2644.1
40°	970.7	992.5	1024.6	1153.1	1281.6	1626.9	1972.1	2303.7	2635.2	2751.7	2868.2
42.5°	916.5	943.9	973.5	1088.6	1203.6	1593.9	1984.3	2406.7	2829.1	2997.2	3165.3
45°	862.5	889.2	919.1	1020.0	1120.9	1563.2	2005.7	2542.2	3078.8	3305.5	3532.4
47.5°	814.4	837.3	876.0	965.8	1055.5	1538.0	2020.4	2686.6	3352.9	3672.2	3991.2
50°	772.0	798.7	849.5	929.8	1010.0	1510.4	2010.7	2820.6	3630.4	4111.7	4592.8
52.5°	740.5	777.7	836.1	906.0	976.0	1463.9	1951.8	2907.6	3863.3	4573.3	5283.4
55°	723.6	779.8	834.1	888.9	943.5	1386.7	1829.8	2888.4	3947.0	4982.7	6018.5
57.5°	713.6	781.9	829.8	868.5	907.1	1277.9	1648.6	2753.5	3858.4	5272.8	6687.2
60°	704.2	775.3	807.0	837.3	867.7	1136.6	1405.5	2502.3	3599.3	5345.3	7091.4
62.5°	693.1	759.1	763.0	783.2	803.4	967.5	1131.7	2162.9	3194.0	5040.0	6886.2
65°	669.8	720.2	719.8	729.2	738.7	815.4	892.1	1816.4	2740.8	4608.1	6475.4
67.5°	628.4	656.7	657.9	652.7	647.4	669.2	691.0	1477.0	2263.1	4094.1	5925.1
70°	575.7	585.1	585.1	560.5	535.8	529.6	523.4	1163.0	1802.6	3533.3	5263.9
72.5°	517.2	517.1	511.2	476.3	441.3	422.5	403.7	889.1	1374.4	2925.2	4476.0
75°	450.7	452.9	425.9	386.7	347.5	330.5	313.4	645.3	977.1	2228.2	3479.3
77.5°	384.1	385.3	340.6	302.6	264.6	252.9	241.4	437.3	633.1	1559.5	2485.9
80°	308.1	308.2	254.9	222.7	190.5	185.7	180.9	281.8	382.5	1004.8	1627.0
82.5°	226.6	224.1	178.6	154.8	131.1	130.2	129.3	173.2	217.4	581.6	945.8
85°	149.2	145.9	112.0	94.7	77.3	77.8	78.2	92.7	107.1	261.6	416.2
87.5°	65.9	61.7	47.7	40.5	33.4	33.8	34.2	38.4	42.5	85.7	128.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4
2.5°	1685.5	1691.9	1701.0	1710.0	1715.3	1720.8	1723.4	1726.2	1725.0	1726.2	1723.4
5°	1827.8	1850.1	1872.2	1894.2	1906.2	1918.2	1925.5	1932.7	1938.3	1932.7	1925.5
7.5°	1968.8	2004.9	2037.4	2070.0	2089.6	2109.1	2119.8	2130.3	2135.4	2130.3	2119.8
10°	2072.8	2115.5	2153.6	2191.9	2214.9	2238.0	2248.2	2258.5	2262.4	2258.5	2248.2
12.5°	2135.9	2182.2	2216.8	2251.1	2267.9	2284.7	2290.4	2296.0	2296.6	2296.0	2290.4
15°	2165.8	2205.8	2227.4	2249.2	2249.7	2250.3	2244.3	2238.3	2231.2	2238.3	2244.3
17.5°	2173.2	2200.3	2200.7	2201.0	2176.7	2152.5	2130.3	2107.9	2092.2	2107.9	2130.3
20°	2178.0	2187.6	2159.1	2130.6	2077.1	2023.5	1984.5	1945.4	1921.5	1945.4	1984.5
22.5°	2182.3	2170.0	2111.1	2052.2	1973.3	1894.5	1845.7	1797.0	1770.5	1797.0	1845.7
25°	2189.3	2150.3	2060.9	1971.4	1875.6	1780.0	1728.7	1677.5	1652.5	1677.5	1728.7
27.5°	2204.2	2134.5	2016.0	1897.4	1791.4	1685.3	1634.9	1584.4	1560.8	1584.4	1634.9
30°	2231.4	2127.6	1981.6	1835.7	1725.2	1614.7	1567.9	1521.1	1499.1	1521.1	1567.9
32.5°	2265.6	2123.4	1958.3	1793.1	1689.3	1585.5	1548.8	1512.0	1496.1	1512.0	1548.8
35°	2321.8	2147.9	1975.8	1803.8	1731.6	1659.6	1651.0	1642.5	1641.1	1642.5	1651.0
37.5°	2439.4	2234.7	2078.4	1922.0	1917.3	1912.6	1951.8	1991.0	2011.4	1991.0	1951.8
40°	2645.6	2423.0	2306.7	2190.4	2272.5	2354.5	2449.9	2545.1	2592.5	2545.1	2449.9
42.5°	2944.5	2723.6	2656.7	2589.7	2768.7	2947.7	3121.0	3294.2	3396.0	3294.2	3121.0
45°	3333.9	3135.5	3106.0	3076.3	3363.2	3650.0	3934.8	4219.5	4392.4	4219.5	3934.8
47.5°	3798.3	3605.2	3599.3	3593.2	4007.0	4420.7	4837.5	5254.4	5499.0	5254.4	4837.5
50°	4354.4	4116.1	4117.1	4118.1	4651.3	5184.7	5734.9	6285.0	6617.7	6285.0	5734.9
52.5°	4994.7	4706.1	4676.9	4647.7	5284.6	5921.6	6602.3	7283.0	7681.8	7283.0	6602.3
55°	5733.3	5448.2	5334.3	5220.5	5929.5	6638.3	7449.9	8261.5	8735.7	8261.5	7449.9
57.5°	6531.9	6376.5	6148.4	5920.2	6636.0	7351.8	8271.0	9190.2	9778.3	9190.2	8271.0
60°	7332.5	7573.8	7290.4	7007.0	7684.4	8361.8	9346.1	10330.2	10965.8	10330.2	9346.1
62.5°	7545.2	8204.4	8172.4	8140.4	8761.0	9381.6	10318.0	11254.3	11841.7	11254.3	10318.0
65°	7094.0	7712.6	7835.1	7957.4	8746.0	9534.7	10442.7	11350.5	11850.7	11350.5	10442.7
67.5°	6513.5	7101.8	7159.2	7216.5	8038.3	8859.9	9771.7	10683.6	11075.4	10683.6	9771.7
70°	5903.9	6543.9	6569.5	6595.3	7330.0	8064.8	8849.4	9634.2	9851.9	9634.2	8849.4
72.5°	5210.4	5944.8	5963.2	5981.7	6556.6	7131.4	7719.2	8306.8	8328.8	8306.8	7719.2
75°	4239.4	4999.4	5067.7	5136.0	5583.3	6030.5	6444.3	6858.0	6747.1	6858.0	6444.3
77.5°	3195.4	3905.0	4002.6	4100.3	4440.4	4780.4	5073.8	5367.2	5176.8	5367.2	5073.8
80°	2223.9	2820.8	2942.3	3063.6	3320.4	3577.0	3731.2	3885.3	3578.8	3885.3	3731.2
82.5°	1353.8	1762.0	1897.6	2033.2	2210.0	2386.7	2451.1	2515.2	2274.4	2515.2	2451.1
85°	632.7	849.3	964.6	1079.9	1225.2	1370.4	1406.9	1443.4	1250.4	1443.4	1406.9
87.5°	201.6	274.4	338.8	403.1	475.7	548.4	551.4	554.5	465.6	554.5	551.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P963418
 CATALOG NUMBER: NVN-SB3A-722-U-SLR

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4	1561.4
2.5°	1720.8	1715.3	1710.0	1701.0	1691.9	1685.5	1679.2
5°	1918.2	1906.2	1894.2	1872.2	1850.1	1827.8	1805.5
7.5°	2109.1	2089.6	2070.0	2037.4	2004.9	1968.8	1932.5
10°	2238.0	2214.9	2191.9	2153.6	2115.5	2072.8	2029.9
12.5°	2284.7	2267.9	2251.1	2216.8	2182.2	2135.9	2089.6
15°	2250.3	2249.7	2249.2	2227.4	2205.8	2165.8	2125.8
17.5°	2152.5	2176.7	2201.0	2200.7	2200.3	2173.2	2146.1
20°	2023.5	2077.1	2130.6	2159.1	2187.6	2178.0	2168.7
22.5°	1894.5	1973.3	2052.2	2111.1	2170.0	2182.3	2194.7
25°	1780.0	1875.6	1971.4	2060.9	2150.3	2189.3	2228.2
27.5°	1685.3	1791.4	1897.4	2016.0	2134.5	2204.2	2273.8
30°	1614.7	1725.2	1835.7	1981.6	2127.6	2231.4	2335.3
32.5°	1585.5	1689.3	1793.1	1958.3	2123.4	2265.6	2407.7
35°	1659.6	1731.6	1803.8	1975.8	2147.9	2321.8	2495.8
37.5°	1912.6	1917.3	1922.0	2078.4	2234.7	2439.4	2644.1
40°	2354.5	2272.5	2190.4	2306.7	2423.0	2645.6	2868.2
42.5°	2947.7	2768.7	2589.7	2656.7	2723.6	2944.5	3165.3
45°	3650.0	3363.2	3076.3	3106.0	3135.5	3333.9	3532.4
47.5°	4420.7	4007.0	3593.2	3599.3	3605.2	3798.3	3991.2
50°	5184.7	4651.3	4118.1	4117.1	4116.1	4354.4	4592.8
52.5°	5921.6	5284.6	4647.7	4676.9	4706.1	4994.7	5283.4
55°	6638.3	5929.5	5220.5	5334.3	5448.2	5733.3	6018.5
57.5°	7351.8	6636.0	5920.2	6148.4	6376.5	6531.9	6687.2
60°	8361.8	7684.4	7007.0	7290.4	7573.8	7332.5	7091.4
62.5°	9381.6	8761.0	8140.4	8172.4	8204.4	7545.2	6886.2
65°	9534.7	8746.0	7957.4	7835.1	7712.6	7094.0	6475.4
67.5°	8859.9	8038.3	7216.5	7159.2	7101.8	6513.5	5925.1
70°	8064.8	7330.0	6595.3	6569.5	6543.9	5903.9	5263.9
72.5°	7131.4	6556.6	5981.7	5963.2	5944.8	5210.4	4476.0
75°	6030.5	5583.3	5136.0	5067.7	4999.4	4239.4	3479.3
77.5°	4780.4	4440.4	4100.3	4002.6	3905.0	3195.4	2485.9
80°	3577.0	3320.4	3063.6	2942.3	2820.8	2223.9	1627.0
82.5°	2386.7	2210.0	2033.2	1897.6	1762.0	1353.8	945.8
85°	1370.4	1225.2	1079.9	964.6	849.3	632.7	416.2
87.5°	548.4	475.7	403.1	338.8	274.4	201.6	128.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)