

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: STREETWORKS

Report Number: P960410

Luminaire Tested: **NVN-SB1C-750-U-SLR-HSS**

Issue Date: 1/21/2025

**Test Information**

Test Method: LM-79-08  
Report Number: P960410  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/21/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: STREETWORKS  
Catalog Number: NVN-SB1C-750-U-SLR-HSS  
Description: NAVION ROADWAY AND AREA HIGH DENSITY LED LUMINAIRE  
(1) 70 CRI, 5000K, 615mA LIGHTSQUARE WITH 26 LEDS AND SPILL LIGHT  
ELIMINATOR RIGHT OPTICS WITH HOUSE SIDE SHIELD  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6200.2 lumens  
Efficiency: N/A  
Efficacy: 114.0 lumens/watt  
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')  
IES Classification: Type IV - Short  
BUG Rating: B1 - U0 - G2  
  
Input Watts (W): 54.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



REPORT NUMBER: P960410  
 CATALOG NUMBER: NVN-SB1C-750-U-SLR-HSS

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

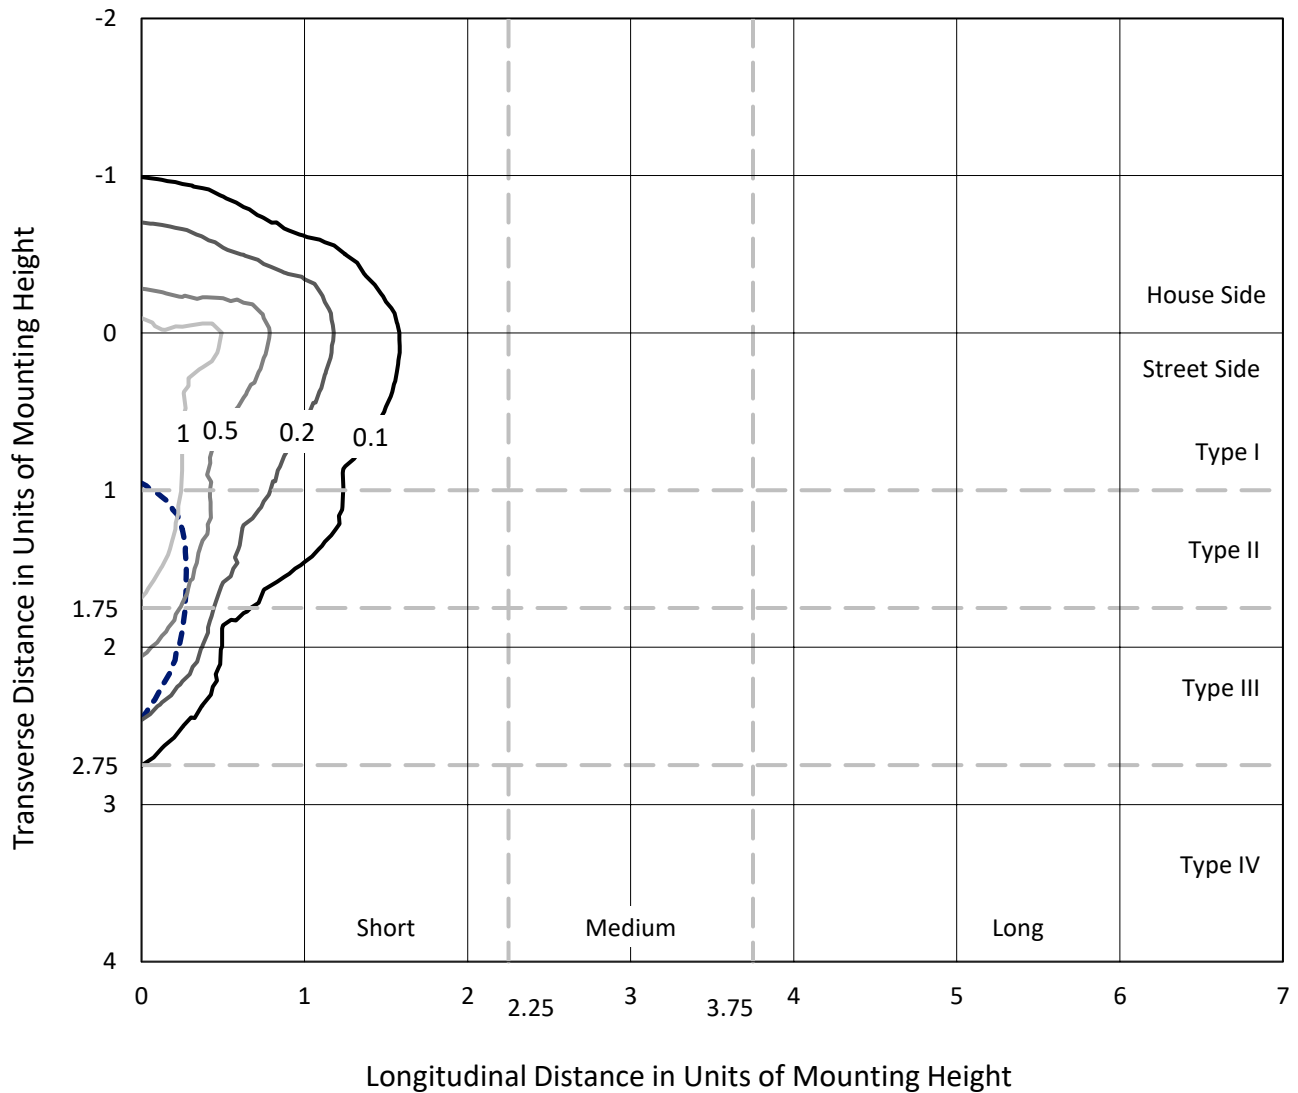

Based on 25 foot mounting height. Maximum calculated value = 1.9 fc  
 Type IV - Short - N/A

REPORT NUMBER: P960410  
CATALOG NUMBER: NVN-SB1C-750-U-SLR-HSS

### Luminous Intensity Polar Plot

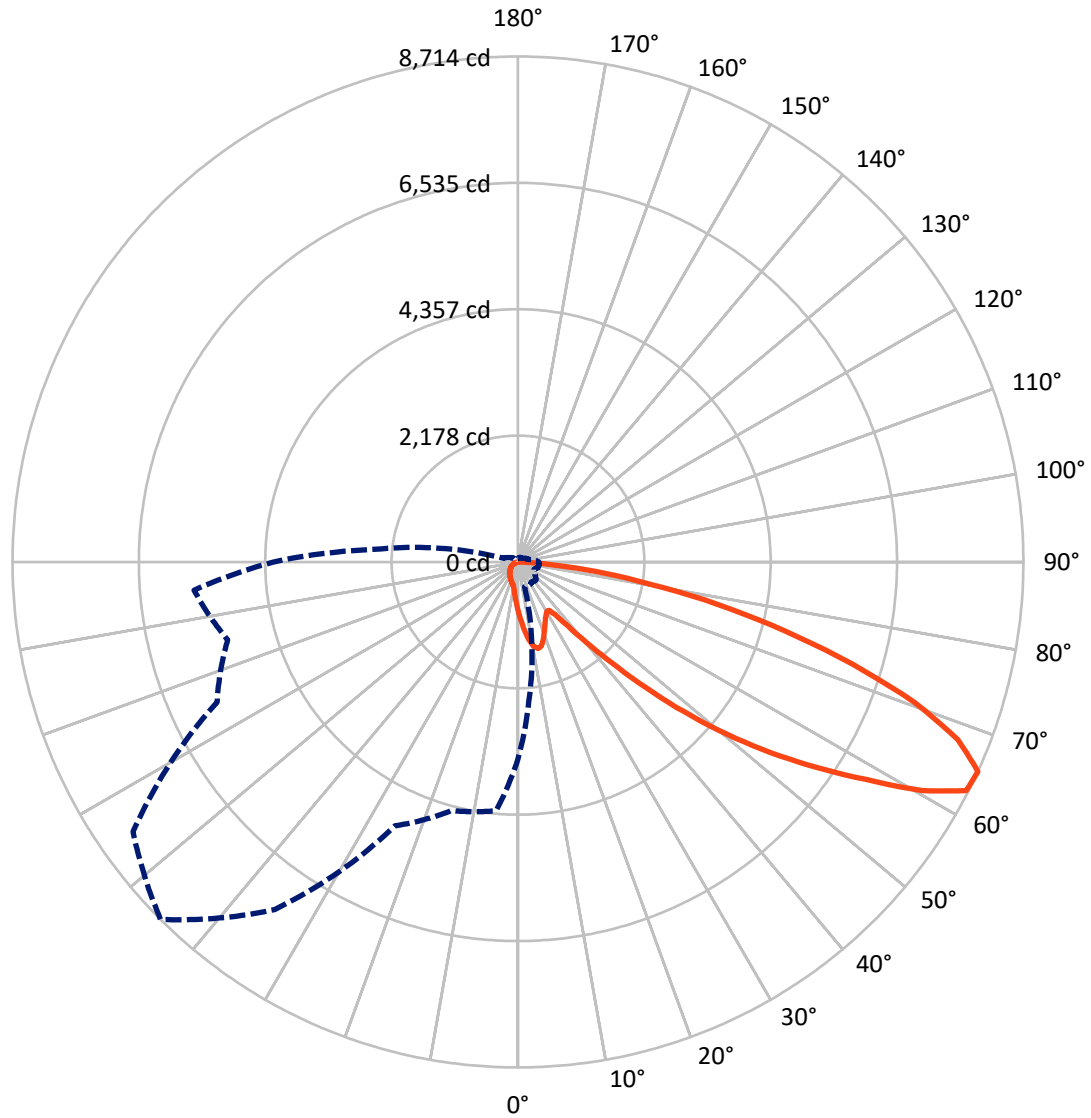

— Vertical Plane Through 315-Deg Lateral    - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P960410  
 CATALOG NUMBER: NVN-SB1C-750-U-SLR-HSS


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	868.3	0.0	868.3
	% Fixture	14.0	0.0	14.0
<b>Street Side</b>	Lumens	5331.9	0.0	5331.9
	% Fixture	86.0	0.0	86.0
<b>Total</b>	Lumens	6200.2	0.0	6200.2
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	84.5	1.4
10°-20°	253.4	4.1
20°-30°	373.3	6.0
30°-40°	479.6	7.7
40°-50°	775.6	12.5
50°-60°	1360.1	21.9
60°-70°	1701.9	27.4
70°-80°	994.5	16.0
80°-90°	177.4	2.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	6200.2	100.0
0°-180°	6200.2	100.0

**Coefficient of Utilization**

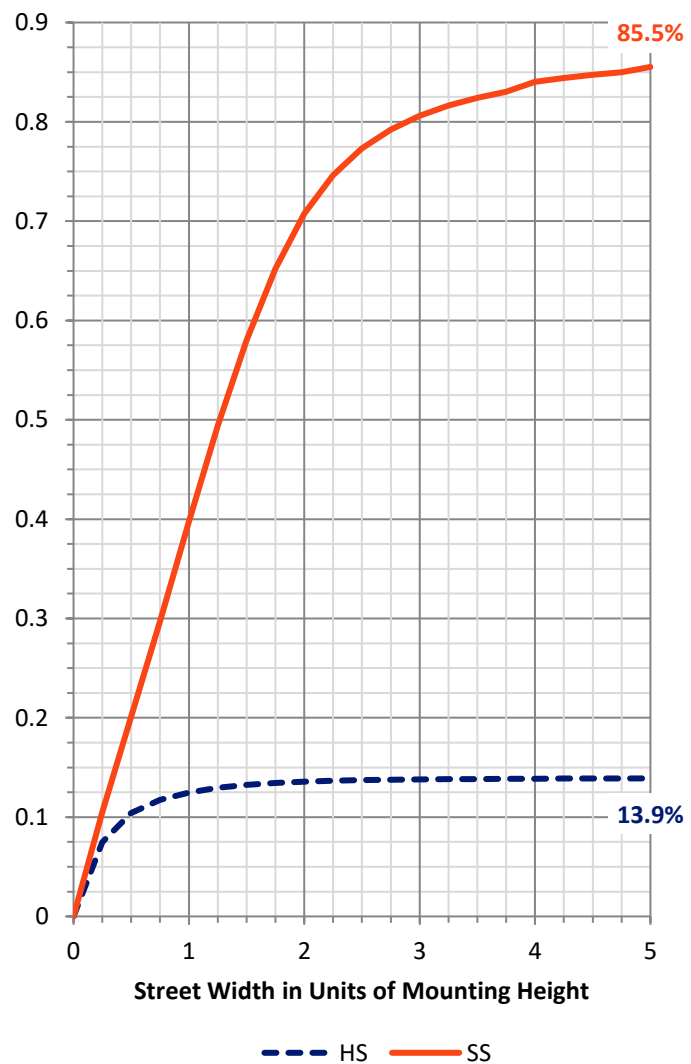

REPORT NUMBER: P960410


CATALOG NUMBER: NVN-SB1C-750-U-SLR-HSS

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	483.6	7.8			
FM (30°-60°)	2173.1	35.0			
FH (60°-80°)	2504.6	40.4			G2/5000
FVH (80°-90°)	170.6	2.8			G2/225
BL (0°-30°)	227.6	3.7	B1/500		
BM (30°-60°)	442.2	7.1	B1/1000		
BH (60°-80°)	191.7	3.1	B1/500		G1/500
BVH (80°-90°)	6.8	0.1			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B1-U0-G2**

Type IV Short

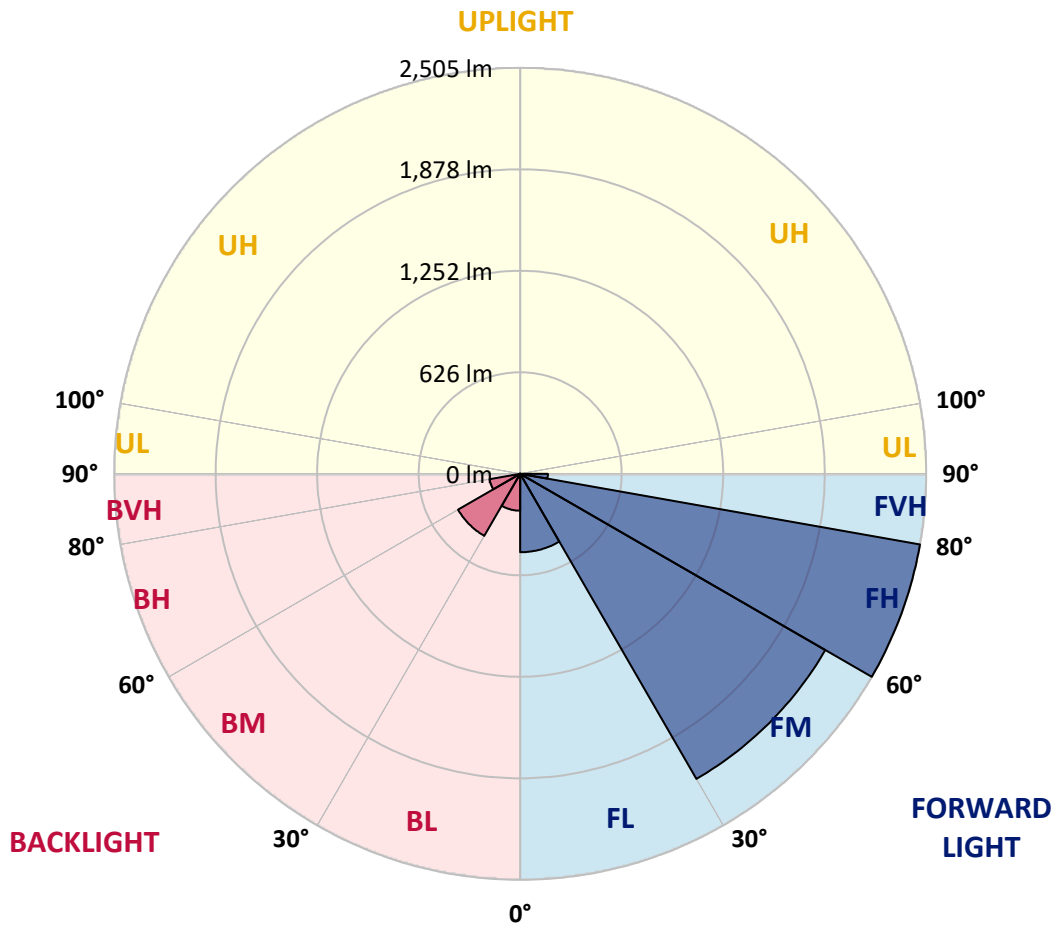

REPORT NUMBER: P960410

CATALOG NUMBER: NVN-SB1C-750-U-SLR-HSS

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5
2.5°	970.1	953.4	943.5	919.2	894.8	875.1	848.7	831.2	810.3	790.2	772.2
5°	1081.1	1054.1	1021.7	977.2	936.7	895.2	855.2	815.4	773.6	735.1	711.6
7.5°	1175.1	1136.2	1078.9	1020.0	968.3	918.3	871.4	818.8	767.9	707.8	675.7
10°	1246.8	1197.2	1122.1	1044.8	985.4	935.0	889.3	844.9	793.7	721.0	680.8
12.5°	1290.4	1237.4	1148.1	1057.6	989.6	933.3	897.8	878.2	858.1	786.0	738.9
15°	1322.4	1265.2	1166.4	1066.5	979.8	910.6	884.6	904.3	927.3	881.2	827.0
17.5°	1355.7	1295.5	1190.4	1070.4	953.4	866.6	855.6	906.4	959.8	957.7	903.8
20°	1387.3	1327.5	1211.3	1067.8	910.6	813.2	823.1	888.0	950.0	976.0	947.0
22.5°	1423.6	1360.4	1231.4	1058.0	855.2	763.3	794.1	859.0	913.2	943.9	935.0
25°	1468.0	1401.9	1259.6	1043.4	795.3	721.8	764.5	825.2	869.2	890.5	890.1
27.5°	1515.9	1451.4	1297.2	1035.8	747.0	692.4	731.2	785.0	824.4	839.3	839.3
30°	1575.2	1509.0	1341.6	1027.3	715.4	675.3	696.7	738.5	776.9	791.9	791.9
32.5°	1640.2	1573.2	1384.4	1006.8	696.2	662.5	662.9	689.4	724.4	742.3	744.9
35°	1721.4	1650.0	1430.1	961.9	680.8	647.5	630.1	642.9	671.9	693.2	698.7
37.5°	1837.1	1750.8	1485.9	897.8	658.3	624.4	595.4	598.4	620.6	644.1	652.6
40°	1996.8	1886.2	1551.7	831.2	625.8	592.0	557.4	556.2	572.4	595.4	604.9
42.5°	2213.0	2065.2	1630.8	767.5	594.6	552.7	517.2	515.2	528.0	548.0	557.8
45°	2498.3	2294.2	1727.7	712.9	570.2	514.2	479.3	478.4	489.0	506.6	516.8
47.5°	2863.4	2612.3	1824.7	675.7	557.4	483.9	448.0	449.8	459.2	475.0	482.3
50°	3336.3	3027.0	1854.2	656.9	557.4	467.7	420.2	428.9	436.5	448.4	452.7
52.5°	3903.1	3425.1	1756.7	639.8	560.8	469.9	396.8	415.1	420.8	431.0	432.7
55°	4428.5	3620.4	1510.3	616.3	561.7	483.1	376.7	404.1	414.3	418.2	417.7
57.5°	4733.4	3553.3	1221.2	576.7	558.2	492.1	363.9	390.4	410.0	412.6	408.8
60°	4675.3	3317.9	899.1	546.3	533.1	488.6	360.1	369.5	400.7	404.5	399.3
62.5°	4227.7	2923.3	624.0	522.9	477.5	473.7	358.7	336.6	380.2	389.5	382.3
65°	3398.3	2301.3	440.7	450.2	418.6	441.3	352.0	302.4	355.4	368.2	357.1
67.5°	2465.4	1557.3	318.3	364.8	379.2	388.7	336.6	277.7	327.2	344.3	329.7
70°	1582.1	841.0	223.3	240.9	319.5	330.2	310.1	255.4	298.6	318.3	302.4
72.5°	1124.6	496.7	160.6	168.7	256.7	275.1	273.0	230.6	265.3	289.2	270.4
75°	776.1	273.8	108.4	120.4	186.2	223.3	210.5	198.2	224.7	249.0	230.6
77.5°	486.5	122.6	64.9	83.7	122.2	175.6	144.3	153.3	175.2	197.7	178.6
80°	270.8	47.5	36.3	55.6	66.6	127.7	79.8	98.7	128.9	145.2	129.9
82.5°	58.9	5.9	16.2	23.9	26.0	74.3	42.3	57.2	81.2	79.8	69.2
85°	0.0	0.0	3.0	3.4	1.7	32.1	15.4	18.8	26.4	24.8	18.8
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P960410  
 CATALOG NUMBER: NVN-SB1C-750-U-SLR-HSS

**CANDELA DISTRIBUTION (continued):**

	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°	185°
0°	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5
2.5°	768.9	747.9	732.6	724.9	718.4	724.4	727.9	727.9	742.3	750.9	754.3
5°	696.7	659.1	630.5	611.2	599.7	603.5	607.8	612.5	630.9	643.3	651.4
7.5°	646.7	589.0	545.4	518.5	504.4	506.6	509.5	513.4	531.4	543.8	554.4
10°	637.2	554.4	492.9	457.5	440.3	437.4	435.6	434.4	445.1	454.5	463.0
12.5°	675.7	556.2	470.3	427.1	406.2	397.2	386.9	378.8	380.6	386.5	397.2
15°	744.5	577.9	463.0	411.3	385.3	370.3	358.3	348.5	346.4	348.5	350.2
17.5°	823.1	607.4	462.2	397.7	365.2	349.8	340.0	331.1	328.0	328.5	330.6
20°	875.1	630.9	459.6	382.3	345.9	332.3	323.8	314.8	311.8	312.6	313.1
22.5°	880.3	643.3	455.7	365.2	326.8	315.2	306.7	298.6	298.2	298.2	300.7
25°	852.6	643.3	447.6	349.8	308.4	298.2	290.5	280.6	282.3	283.2	286.6
27.5°	809.4	627.9	432.2	337.4	292.5	281.9	274.2	265.3	267.4	268.7	272.5
30°	766.7	608.2	413.9	323.4	277.7	265.3	259.7	252.0	252.9	254.6	258.8
32.5°	726.9	587.3	392.1	311.8	262.7	250.3	246.0	237.5	238.7	240.5	245.2
35°	687.7	564.3	366.4	298.2	249.0	236.7	233.2	223.3	224.3	226.8	232.0
37.5°	645.4	539.9	345.5	284.4	235.7	222.9	219.6	209.3	210.1	213.1	219.1
40°	601.0	516.0	325.0	270.0	221.7	208.9	205.9	194.7	195.7	199.1	205.4
42.5°	556.2	489.9	309.2	251.1	207.2	193.5	190.5	180.3	181.5	185.4	191.8
45°	514.7	458.7	299.0	230.2	193.5	178.1	175.2	165.7	168.3	172.6	179.0
47.5°	479.3	426.7	294.7	212.7	179.0	162.4	159.8	152.0	156.3	161.0	166.2
50°	449.0	396.0	289.2	194.7	165.3	148.6	146.1	140.9	146.5	151.2	155.9
52.5°	427.1	360.9	277.2	178.6	153.3	137.1	136.2	133.7	138.8	143.1	147.4
55°	408.4	324.6	258.0	164.4	142.7	127.3	128.1	126.9	131.1	134.6	138.4
57.5°	391.2	293.0	233.6	153.3	131.1	118.7	121.3	119.6	121.8	123.8	128.5
60°	370.7	261.0	204.6	140.9	117.5	110.2	113.2	108.4	108.0	109.0	110.2
62.5°	340.4	217.8	174.2	125.6	105.5	100.8	102.1	93.1	86.3	86.3	87.5
65°	298.2	175.2	146.1	108.4	91.8	87.9	87.1	74.3	64.9	64.1	68.0
67.5°	249.0	143.9	121.3	91.4	76.5	73.9	74.7	65.4	56.0	55.1	59.3
70°	202.8	119.2	97.8	73.1	58.9	61.5	65.4	56.0	46.9	45.7	49.5
72.5°	164.9	94.8	76.5	56.0	43.6	50.8	55.6	45.7	37.2	36.3	39.8
75°	127.3	69.6	54.6	38.0	31.6	39.3	43.6	33.3	26.4	25.2	28.2
77.5°	85.0	43.2	30.7	23.9	18.8	27.0	29.0	17.5	15.4	15.0	17.1
80°	51.7	20.1	13.2	11.6	6.5	9.8	11.6	7.3	8.1	8.5	10.2
82.5°	26.0	5.5	2.2	0.4	0.0	0.0	3.4	1.7	3.4	4.3	6.5
85°	2.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.8	2.2	3.9
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P960410  
 CATALOG NUMBER: NVN-SB1C-750-U-SLR-HSS

**CANDELA DISTRIBUTION (continued):**

	195°	205°	215°	225°	235°	245°	255°	265°	270°	275°	285°
0°	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5
2.5°	778.3	796.2	813.2	840.6	868.8	896.6	924.8	952.1	961.9	969.1	985.4
5°	688.5	722.3	761.6	815.8	873.9	933.7	994.4	1049.9	1075.1	1092.1	1130.6
7.5°	595.8	639.8	696.2	777.8	868.8	964.0	1059.2	1146.9	1187.5	1220.3	1278.8
10°	504.0	551.9	623.2	716.3	839.3	976.0	1107.5	1227.9	1280.5	1321.9	1401.4
12.5°	423.3	468.1	542.8	645.9	793.1	966.6	1135.3	1280.1	1342.0	1388.6	1475.7
15°	366.4	398.1	464.3	575.3	738.5	936.2	1137.0	1304.9	1372.8	1421.5	1497.1
17.5°	334.9	345.5	388.7	503.6	677.8	896.6	1121.2	1313.4	1386.0	1431.3	1483.9
20°	317.8	319.5	331.5	410.5	600.1	859.4	1106.3	1321.9	1398.4	1436.4	1452.2
22.5°	304.1	304.1	307.1	335.7	499.8	815.0	1101.6	1336.9	1415.5	1439.0	1406.5
25°	291.7	291.7	292.5	300.2	396.0	747.0	1098.6	1360.0	1439.0	1445.5	1356.2
27.5°	278.9	279.3	279.3	283.6	319.1	654.8	1085.8	1389.9	1467.2	1454.0	1307.9
30°	266.1	266.9	266.9	270.0	282.3	546.7	1060.6	1425.8	1503.9	1465.0	1260.0
32.5°	253.3	254.1	254.1	256.7	265.7	436.5	1029.0	1458.7	1541.1	1469.7	1215.6
35°	240.1	241.3	240.5	243.8	253.3	347.3	988.8	1491.6	1581.3	1484.7	1193.8
37.5°	226.8	227.7	227.2	230.6	241.3	299.8	942.3	1516.3	1635.9	1518.0	1219.9
40°	213.6	213.1	213.1	217.0	228.5	286.2	883.8	1555.6	1714.5	1576.6	1333.5
42.5°	199.9	199.9	199.1	203.4	217.4	275.9	827.8	1626.1	1829.0	1669.6	1535.1
45°	187.5	187.1	185.4	189.2	206.7	258.0	808.1	1757.7	1998.1	1820.4	1779.0
47.5°	175.6	175.2	170.9	174.2	193.9	241.8	881.6	1972.9	2232.7	2042.1	2007.6
50°	164.9	165.3	157.2	160.2	181.1	229.4	1040.9	2252.2	2543.9	2340.7	2224.0
52.5°	155.1	155.1	144.3	146.1	165.3	218.2	1192.6	2555.1	2954.9	2757.1	2476.5
55°	145.2	144.3	132.4	133.2	149.4	202.4	1215.1	2850.6	3515.2	3383.7	2821.6
57.5°	134.1	132.4	121.3	121.3	135.0	191.0	1053.3	3077.9	4210.7	4304.6	3319.3
60°	120.4	119.2	111.9	109.8	123.4	201.2	743.2	3104.4	4659.1	5529.2	4272.2
62.5°	102.9	104.7	100.8	97.8	112.3	208.9	440.3	2891.2	4550.7	5918.8	5413.4
65°	81.2	87.9	87.1	85.0	123.4	176.0	260.1	2482.0	4217.9	5604.4	5180.7
67.5°	69.2	73.9	72.6	72.6	129.5	133.7	163.6	1939.2	3760.0	5231.5	4627.6
70°	58.9	63.7	58.9	58.9	97.8	81.2	113.2	1354.0	3265.9	4818.9	4264.5
72.5°	48.7	53.4	48.3	44.9	78.2	60.7	82.8	846.1	2796.8	4389.2	4015.8
75°	37.2	42.7	38.8	34.6	51.7	45.3	62.8	491.6	2317.2	3755.3	3661.8
77.5°	23.5	30.7	29.0	24.4	38.0	32.9	45.3	292.5	1788.0	2934.4	3149.6
80°	14.6	15.8	16.2	15.4	21.8	22.2	30.7	166.6	1223.7	2045.1	2460.7
82.5°	9.4	9.4	7.3	8.1	10.7	12.8	17.5	62.8	719.2	1245.1	1712.8
85°	6.9	5.9	3.9	3.9	5.1	6.5	6.9	19.3	291.7	491.6	669.7
87.5°	3.4	3.0	1.3	1.7	2.6	2.2	1.7	0.8	73.5	157.2	110.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P960410  
 CATALOG NUMBER: NVN-SB1C-750-U-SLR-HSS

**CANDELA DISTRIBUTION (continued):**

	295°	305°	315°	325°	335°	345°	355°	360°
0°	858.5	858.5	858.5	858.5	858.5	858.5	858.5	858.5
2.5°	993.9	1007.2	1008.0	1008.0	996.5	996.1	972.6	970.1
5°	1170.3	1178.9	1181.0	1176.7	1153.6	1136.6	1090.9	1081.1
7.5°	1331.8	1348.9	1348.9	1338.6	1301.0	1266.0	1199.8	1175.1
10°	1460.8	1480.4	1476.2	1455.2	1407.8	1359.6	1279.3	1246.8
12.5°	1523.6	1543.6	1532.6	1508.6	1462.5	1411.6	1327.1	1290.4
15°	1522.3	1516.7	1505.2	1502.2	1480.0	1441.6	1362.5	1322.4
17.5°	1468.0	1421.1	1412.1	1442.0	1470.2	1460.8	1393.3	1355.7
20°	1382.2	1300.2	1292.1	1349.3	1429.6	1470.6	1421.9	1387.3
22.5°	1291.6	1203.2	1184.4	1247.6	1368.5	1473.6	1458.3	1423.6
25°	1205.8	1116.9	1098.2	1157.1	1300.6	1468.5	1497.5	1468.0
27.5°	1134.1	1048.2	1030.6	1089.6	1235.2	1454.0	1536.8	1515.9
30°	1078.5	999.1	986.3	1043.0	1178.9	1436.0	1586.8	1575.2
32.5°	1046.0	988.0	992.6	1039.2	1148.5	1416.3	1634.7	1640.2
35°	1078.1	1080.7	1121.7	1140.8	1176.7	1413.4	1699.6	1721.4
37.5°	1237.4	1326.2	1411.2	1395.4	1314.7	1448.0	1796.5	1837.1
40°	1508.6	1691.0	1829.0	1768.7	1565.5	1553.9	1936.2	1996.8
42.5°	1840.1	2149.3	2376.6	2215.1	1888.8	1739.3	2135.7	2213.0
45°	2189.9	2714.4	3072.3	2736.6	2233.5	1999.0	2437.7	2498.3
47.5°	2558.5	3401.3	3864.2	3315.0	2553.0	2294.6	2849.4	2863.4
50°	2961.7	4154.2	4671.5	3892.8	2861.4	2633.2	3352.6	3336.3
52.5°	3345.7	4928.7	5461.7	4473.3	3132.2	3053.6	3936.4	3903.1
55°	3712.2	5702.6	6256.6	5031.2	3387.6	3608.8	4630.1	4428.5
57.5°	4137.2	6398.5	7075.9	5591.6	3744.6	4329.8	5405.7	4733.4
60°	4765.5	7189.0	8002.3	6359.5	4423.8	5087.6	5683.8	4675.3
62.5°	5567.7	7916.0	8675.9	7112.2	5105.9	5230.2	5274.2	4227.7
65°	5723.6	8100.1	8713.9	7313.4	5017.9	4436.6	4305.9	3398.3
67.5°	5310.1	7767.3	8182.6	6938.7	4438.8	3428.6	3231.2	2465.4
70°	4846.2	7133.1	7256.5	6301.9	3904.0	2521.8	2182.2	1582.1
72.5°	4370.8	6286.9	6031.5	5472.8	3431.2	1836.2	1574.0	1124.6
75°	3806.1	5174.3	4751.0	4547.2	2840.9	1441.1	1138.8	776.1
77.5°	3048.0	3642.1	3529.0	3524.7	2134.8	1052.9	759.8	486.5
80°	2150.1	2363.8	2306.0	2654.6	1432.1	763.7	457.5	270.8
82.5°	1040.9	1307.0	1341.6	1580.9	696.7	449.4	105.5	58.9
85°	407.4	630.5	531.8	600.1	195.7	125.2	2.6	0.0
87.5°	45.7	73.1	67.0	53.0	23.9	5.1	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)