

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: INVUE

Report Number: P869176

Luminaire Tested: **EMM2-HSN-SA2B-750-U-T5W**

Issue Date: 08/22/2024



**Test Information**

Test Method: LM-79-08  
Report Number: P869176  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 08/22/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: INVUE  
Catalog Number: EMM2-HSN-SA2B-750-U-T5W  
Description: EPIC MODERN SHORT HOUSING DISCRETE LED ARRAYS 100W 70CRI 5000K  
FIXTURE w/ TYPE V SQUARE WIDE DISTRIBUTION OPTIC  
Light Source: (20) 5000K CCT, 70 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 13089.2 lumens  
Efficiency: N/A  
Efficacy: 145.4 lumens/watt  
Luminous Opening: Rectangular (W 0.67' x L: 0.33' x H: 0')  
IES Classification: Type V - Short  
BUG Rating: B4 - U0 - G2

Input Watts (W): 90  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: 0.99  
Total Harmonic Distortion (THDi): 6.20%  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

REPORT NUMBER: P869176  
 CATALOG NUMBER: EMM2-HSN-SA2B-750-U-T5W

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

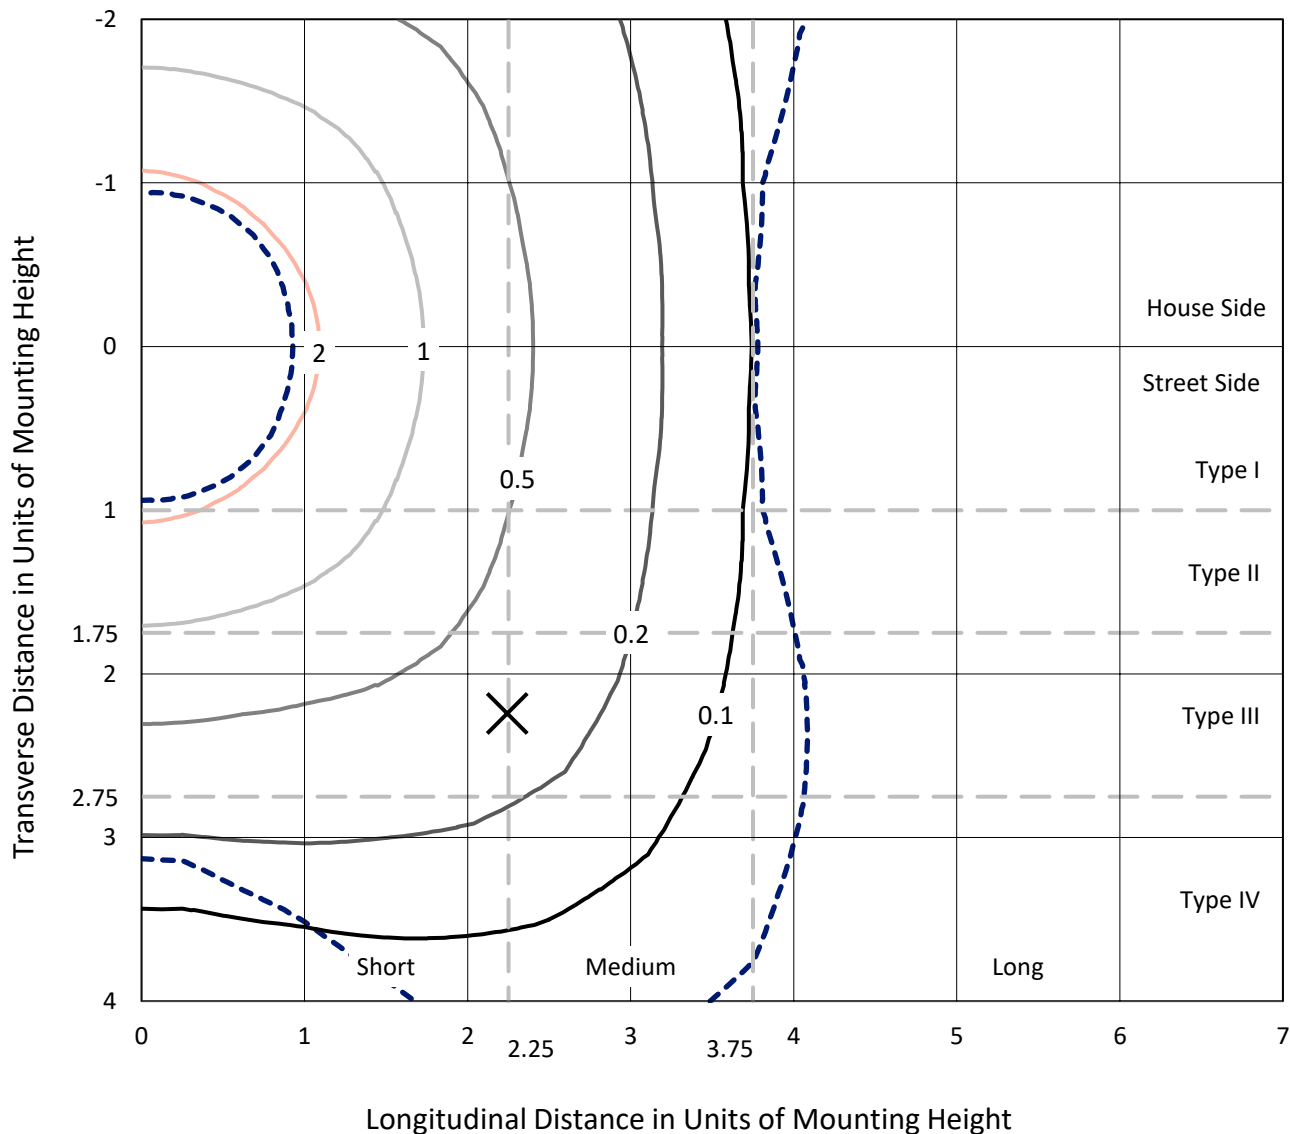

Based on 20 foot mounting height. Maximum calculated value = 2.3 fc  
 Type V - Short - N/A

REPORT NUMBER: P869176  
CATALOG NUMBER: EMM2-HSN-SA2B-750-U-T5W

### Luminous Intensity Polar Plot

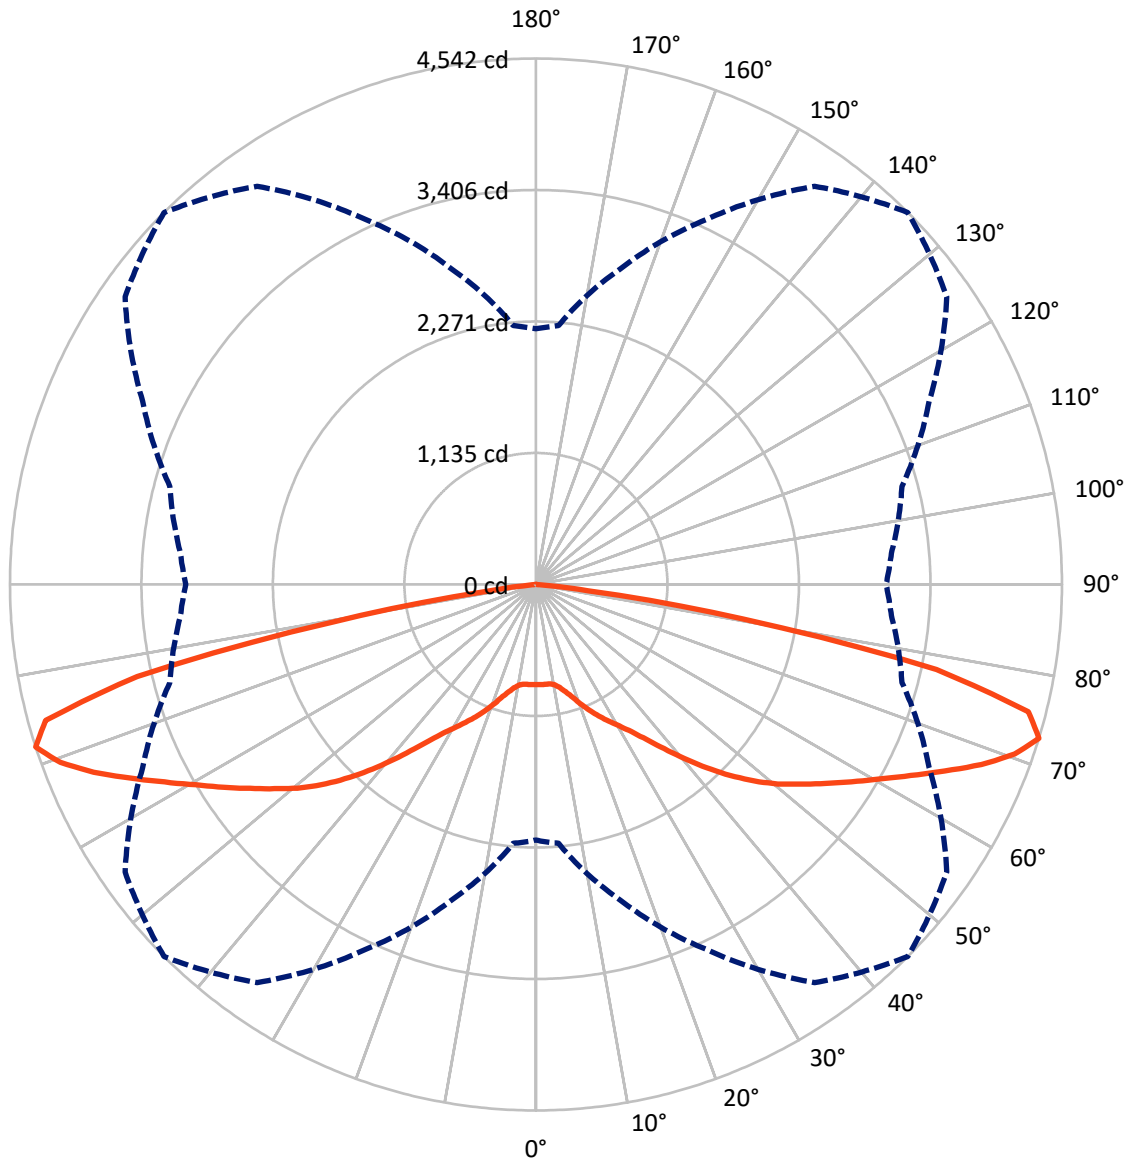

— Vertical Plane Through 45-Deg Lateral      - - - Horizontal Cone Through 72.5-Deg Vertical

REPORT NUMBER: P869176  
 CATALOG NUMBER: EMM2-HSN-SA2B-750-U-T5W


**FLUX DISTRIBUTION:**

|                    |           | Downward | Upward | Total   |
|--------------------|-----------|----------|--------|---------|
| <b>House Side</b>  | Lumens    | 6544.6   | 0.0    | 6544.6  |
|                    | % Fixture | 50.0     | 0.0    | 50.0    |
| <b>Street Side</b> | Lumens    | 6544.6   | 0.0    | 6544.6  |
|                    | % Fixture | 50.0     | 0.0    | 50.0    |
| <b>Total</b>       | Lumens    | 13089.2  | 0.0    | 13089.2 |
|                    | % Fixture | 100.0    | 0.0    | 100.0   |

**Coefficient of Utilization**

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 82.8    | 0.6       |
| 10°-20°   | 276.4   | 2.1       |
| 20°-30°   | 570.3   | 4.4       |
| 30°-40°   | 1049.9  | 8.0       |
| 40°-50°   | 1846.0  | 14.1      |
| 50°-60°   | 2677.4  | 20.5      |
| 60°-70°   | 3490.3  | 26.7      |
| 70°-80°   | 2901.3  | 22.2      |
| 80°-90°   | 194.8   | 1.5       |
| 90°-100°  | 0.0     | 0.0       |
| 100°-110° | 0.0     | 0.0       |
| 110°-120° | 0.0     | 0.0       |
| 120°-130° | 0.0     | 0.0       |
| 130°-140° | 0.0     | 0.0       |
| 140°-150° | 0.0     | 0.0       |
| 150°-160° | 0.0     | 0.0       |
| 160°-170° | 0.0     | 0.0       |
| 170°-180° | 0.0     | 0.0       |
| 0°-90°    | 13089.2 | 100.0     |
| 0°-180°   | 13089.2 | 100.0     |

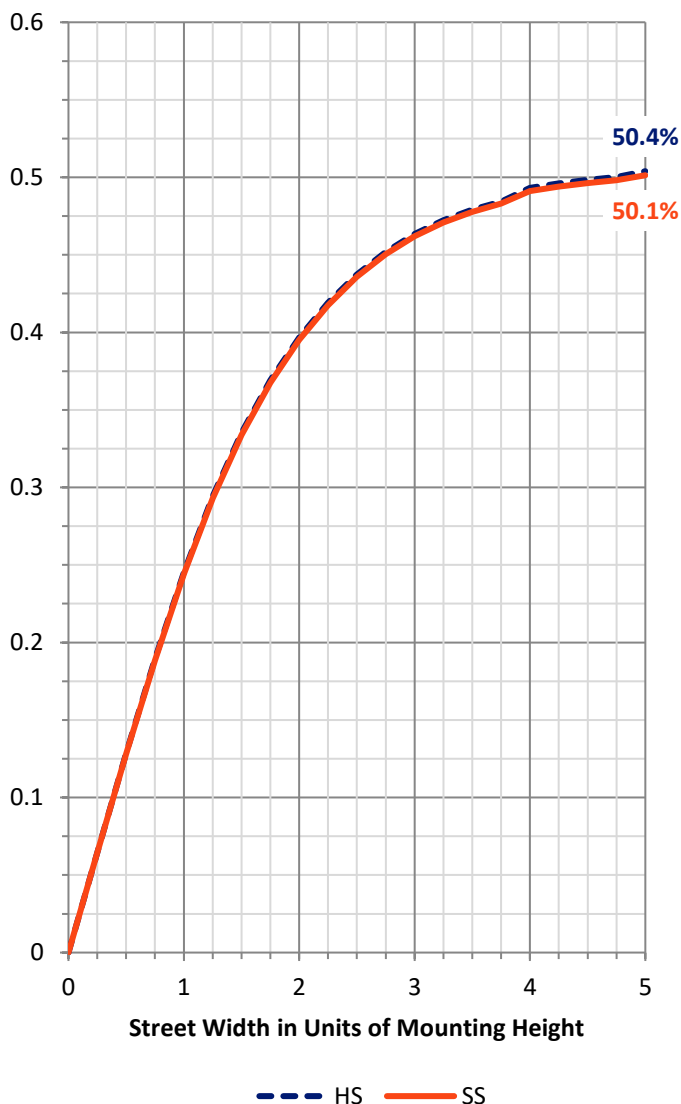


REPORT NUMBER: P869176  
 CATALOG NUMBER: EMM2-HSN-SA2B-750-U-T5W

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

| Zone           | Lumens | % Fixture | Zone Rating/Lumen Limit |      |         |
|----------------|--------|-----------|-------------------------|------|---------|
|                |        |           | B                       | U    | G       |
| FL (0°-30°)    | 464.8  | 3.6       |                         |      |         |
| FM (30°-60°)   | 2786.7 | 21.3      |                         |      |         |
| FH (60°-80°)   | 3195.8 | 24.4      |                         |      | G2/5000 |
| FVH (80°-90°)  | 97.4   | 0.7       |                         |      | G1/100  |
| BL (0°-30°)    | 464.8  | 3.6       | B1/500                  |      |         |
| BM (30°-60°)   | 2786.7 | 21.3      | B3/5000                 |      |         |
| BH (60°-80°)   | 3195.8 | 24.4      | B4/5000                 |      | G2/5000 |
| BVH (80°-90°)  | 97.4   | 0.7       |                         |      | G1/100  |
| UL (90°-100°)  | 0.0    | 0.0       |                         | U0/0 |         |
| UH (100°-180°) | 0.0    | 0.0       |                         | U0/0 |         |

**BUG Rating: B4-U0-G2**  
 Type V Short

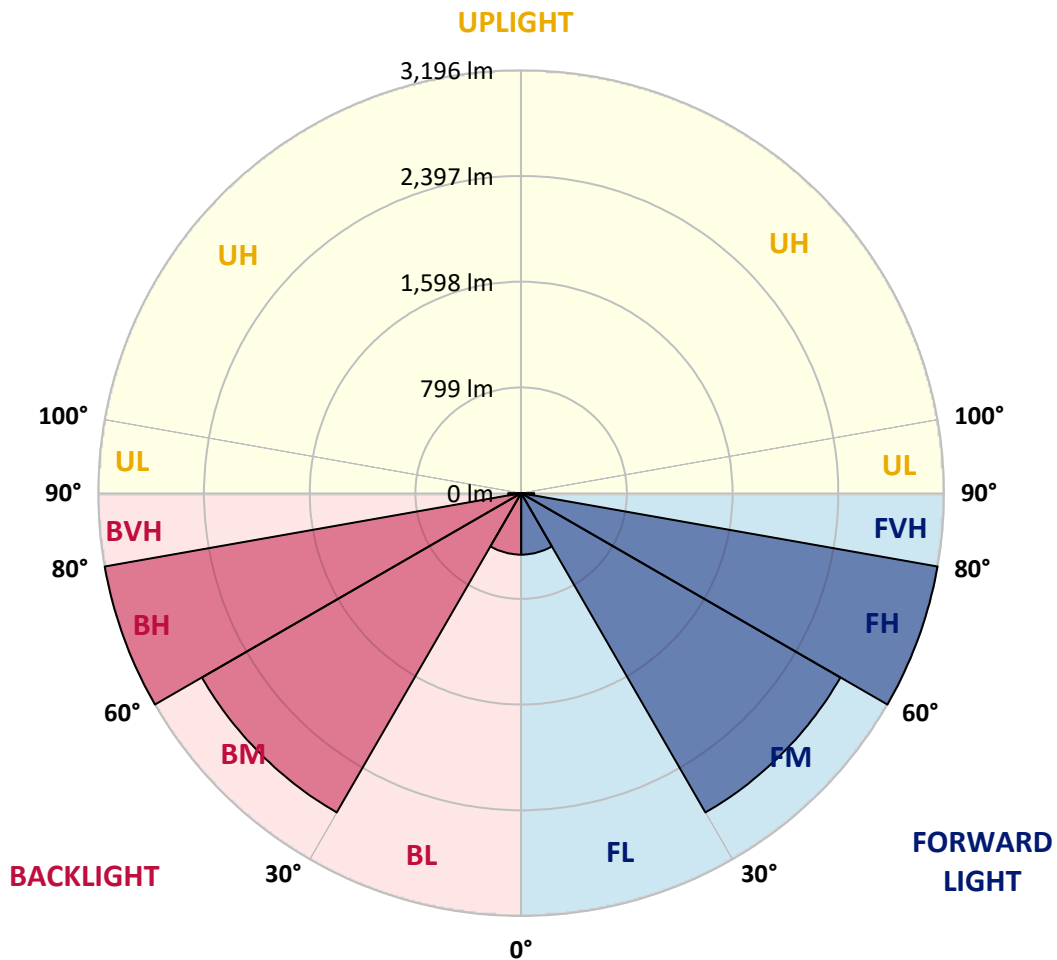



REPORT NUMBER: P869176

CATALOG NUMBER: EMM2-HSN-SA2B-750-U-T5W

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     | 5°     | 15°    | 25°    | 35°    | 45°    | 55°    | 65°    | 75°    | 85°    | 90°    |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°    | 864.1  | 864.1  | 864.1  | 864.1  | 864.1  | 864.1  | 864.1  | 864.1  | 864.1  | 864.1  | 864.1  |
| 2.5°  | 861.4  | 862.8  | 862.8  | 862.8  | 864.1  | 865.5  | 866.8  | 868.2  | 870.9  | 872.3  | 872.3  |
| 5°    | 865.5  | 864.1  | 862.8  | 865.5  | 865.5  | 865.5  | 866.8  | 868.2  | 868.2  | 868.2  | 869.5  |
| 7.5°  | 861.4  | 862.8  | 861.4  | 861.4  | 865.5  | 866.8  | 865.5  | 864.1  | 864.1  | 865.5  | 865.5  |
| 10°   | 876.3  | 875.0  | 873.6  | 873.6  | 877.7  | 879.0  | 877.7  | 876.3  | 876.3  | 879.0  | 879.0  |
| 12.5° | 910.2  | 913.0  | 904.8  | 904.8  | 910.2  | 913.0  | 908.9  | 907.5  | 908.9  | 911.6  | 911.6  |
| 15°   | 963.1  | 961.8  | 956.4  | 950.9  | 956.4  | 960.4  | 955.0  | 952.3  | 953.6  | 960.4  | 955.0  |
| 17.5° | 1021.5 | 1022.8 | 1017.4 | 1012.0 | 1016.0 | 1021.5 | 1013.3 | 1006.6 | 1007.9 | 1010.6 | 1007.9 |
| 20°   | 1086.6 | 1085.2 | 1083.9 | 1083.9 | 1092.0 | 1098.8 | 1086.6 | 1070.3 | 1066.2 | 1063.5 | 1063.5 |
| 22.5° | 1134.1 | 1138.1 | 1139.5 | 1151.7 | 1170.7 | 1177.5 | 1161.2 | 1139.5 | 1123.2 | 1115.1 | 1109.6 |
| 25°   | 1208.7 | 1204.6 | 1201.9 | 1215.5 | 1243.9 | 1256.2 | 1235.8 | 1206.0 | 1189.7 | 1188.3 | 1192.4 |
| 27.5° | 1276.5 | 1276.5 | 1281.9 | 1295.5 | 1322.6 | 1334.8 | 1317.2 | 1287.4 | 1279.2 | 1279.2 | 1275.1 |
| 30°   | 1364.7 | 1360.6 | 1366.0 | 1389.1 | 1409.4 | 1417.6 | 1402.7 | 1382.3 | 1375.5 | 1375.5 | 1368.7 |
| 32.5° | 1467.8 | 1469.1 | 1477.3 | 1492.2 | 1512.5 | 1513.9 | 1508.5 | 1499.0 | 1494.9 | 1490.8 | 1497.6 |
| 35°   | 1625.1 | 1625.1 | 1622.4 | 1633.3 | 1638.7 | 1641.4 | 1644.1 | 1640.1 | 1640.1 | 1640.1 | 1634.6 |
| 37.5° | 1820.5 | 1809.6 | 1808.3 | 1798.8 | 1792.0 | 1798.8 | 1811.0 | 1824.5 | 1835.4 | 1828.6 | 1825.9 |
| 40°   | 2014.5 | 2009.0 | 1992.8 | 1977.8 | 1972.4 | 1975.1 | 1990.0 | 2018.5 | 2030.7 | 2030.7 | 2041.6 |
| 42.5° | 2223.4 | 2212.5 | 2192.2 | 2174.5 | 2159.6 | 2163.7 | 2177.2 | 2212.5 | 2239.6 | 2251.9 | 2246.4 |
| 45°   | 2410.6 | 2401.1 | 2380.7 | 2364.4 | 2353.6 | 2352.2 | 2369.9 | 2392.9 | 2429.6 | 2440.4 | 2448.6 |
| 47.5° | 2570.6 | 2563.9 | 2546.2 | 2529.9 | 2534.0 | 2535.4 | 2540.8 | 2561.1 | 2591.0 | 2605.9 | 2604.6 |
| 50°   | 2700.9 | 2695.4 | 2679.2 | 2685.9 | 2696.8 | 2707.7 | 2700.9 | 2714.4 | 2733.4 | 2740.2 | 2745.6 |
| 52.5° | 2820.2 | 2812.1 | 2801.3 | 2813.5 | 2842.0 | 2863.7 | 2867.7 | 2858.2 | 2863.7 | 2867.7 | 2863.7 |
| 55°   | 2938.3 | 2928.8 | 2926.1 | 2947.8 | 2991.2 | 3031.9 | 3027.8 | 3000.7 | 2993.9 | 2985.7 | 2981.7 |
| 57.5° | 3034.6 | 3027.8 | 3038.6 | 3075.3 | 3159.4 | 3213.6 | 3196.0 | 3133.6 | 3106.5 | 3087.5 | 3082.1 |
| 60°   | 3095.6 | 3094.3 | 3118.7 | 3204.1 | 3331.7 | 3407.6 | 3379.1 | 3272.0 | 3210.9 | 3193.3 | 3185.2 |
| 62.5° | 3128.2 | 3129.5 | 3172.9 | 3324.9 | 3528.4 | 3631.5 | 3581.3 | 3417.1 | 3322.2 | 3304.5 | 3307.2 |
| 65°   | 3158.0 | 3154.0 | 3210.9 | 3426.6 | 3741.3 | 3881.1 | 3813.2 | 3592.1 | 3453.8 | 3418.5 | 3418.5 |
| 67.5° | 3179.7 | 3183.8 | 3269.3 | 3528.4 | 3948.9 | 4148.3 | 4049.3 | 3778.0 | 3594.8 | 3541.9 | 3535.1 |
| 70°   | 2905.7 | 2945.0 | 3212.3 | 3596.2 | 4113.0 | 4384.3 | 4254.1 | 3891.9 | 3600.3 | 3449.7 | 3434.8 |
| 72.5° | 2207.1 | 2243.7 | 2821.6 | 3475.5 | 4197.1 | 4541.7 | 4330.1 | 3746.8 | 3272.0 | 3080.7 | 3023.7 |
| 75°   | 1455.6 | 1481.3 | 2102.6 | 3035.9 | 3963.8 | 4392.5 | 3943.5 | 3227.2 | 2576.1 | 2327.8 | 2342.7 |
| 77.5° | 648.4  | 731.2  | 1340.3 | 2368.5 | 3265.2 | 3535.1 | 3007.4 | 2201.7 | 1573.6 | 1332.1 | 1306.3 |
| 80°   | 271.3  | 297.1  | 506.0  | 1262.9 | 1892.4 | 1811.0 | 1280.6 | 738.0  | 469.4  | 364.9  | 352.7  |
| 82.5° | 78.7   | 81.4   | 100.4  | 218.4  | 385.3  | 453.1  | 272.7  | 138.4  | 131.6  | 104.5  | 96.3   |
| 85°   | 5.4    | 5.4    | 8.1    | 13.6   | 19.0   | 31.2   | 35.3   | 40.7   | 46.1   | 39.3   | 39.3   |
| 87.5° | 2.7    | 2.7    | 2.7    | 4.1    | 4.1    | 5.4    | 4.1    | 4.1    | 4.1    | 4.1    | 4.1    |
| 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Streetworks

Report Number: SP1-2407-157-6

Test Date: 08/07/2024

Luminaire Tested: MEM2-HTN-SA-40-750-U-5WQ-2

Data in this report applies to families of products including MEM2-HTN-SA-40-750-U-5WQ-2



**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2407-157-6  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 08/20/2024  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: Streetworks  
 Catalog Number: **MEM2-HTN-SA-40-750-U-5WQ-2**  
 Description: Epic Modern Light Square 40W 5WQ Optic and Flare Trim

**Spectral Parameters**

CCT (K): 5094  
 CIE u': 0.2082  
 CIE v': 0.4867  
 Duv: 0.0032  
 CIE x: 0.3430  
 CIE y: 0.3564  
 CIE z: 0.3006  
 Peak Wavelength (nm): 451  
 Dominant Wavelength (nm): 568  
 Purity: 9.86439  
 Rf: 73.7  
 Rg: 93

|           |      |      |       |
|-----------|------|------|-------|
| CRI (Ra): | 72.0 |      |       |
| R1:       | 68.6 | R9:  | -39.6 |
| R2:       | 78.1 | R10: | 47.6  |
| R3:       | 84.6 | R11: | 68.2  |
| R4:       | 71.6 | R12: | 41.4  |
| R5:       | 69.6 | R13: | 70.4  |
| R6:       | 69.4 | R14: | 91.4  |
| R7:       | 80.9 | R15: | 61.4  |
| R8:       | 53.1 |      |       |



**Test Conditions**

Stabilization Time: 20M  
 Operation Time: 1H 20M  
 Sphere Temperature (°C): 24.2

REPORT NUMBER: SP1-2407-157-6

| Measurement and Test Equipment |                       |                  |                      |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument                     | Identification Number | Calibration Date | Calibration Due Date |
| Photometer                     | IN0058                | 6/18/2024        | 12/18/2024           |
| Power Meter                    | INXT2011004           | 2/8/2024         | 2/8/2025             |
| AC Power Source                | IN0063                | 10/24/2023       | 10/24/2024           |
| DC Power Source                | IN0208                | 10/24/2023       | 10/24/2024           |
| Sphere Thermometer             | IN0085                | 10/24/2023       | 10/24/2024           |
| Room Thermometer               | IN0046                | 10/24/2023       | 10/24/2024           |

REPORT NUMBER: SP1-2407-157-6

**CIE 1931 Chromaticity Diagram**



**CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles**



Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-2407-157-6

**Photopic Flux vs. Wavelength**



**Photopic Lumens: NR**

| λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360    | 0                        | NR            | 490    | 114                      | NR            | 620    | 361                      | NR            | 750    | 9                        | NR            | 880    | 0                        | NR            |
| 365    | 0                        | NR            | 495    | 145                      | NR            | 625    | 326                      | NR            | 755    | 8                        | NR            | 885    | 0                        | NR            |
| 370    | 0                        | NR            | 500    | 197                      | NR            | 630    | 294                      | NR            | 760    | 7                        | NR            | 890    | 0                        | NR            |
| 375    | 0                        | NR            | 505    | 259                      | NR            | 635    | 261                      | NR            | 765    | 6                        | NR            | 895    | 0                        | NR            |
| 380    | 0                        | NR            | 510    | 319                      | NR            | 640    | 232                      | NR            | 770    | 5                        | NR            | 900    | 0                        | NR            |
| 385    | 0                        | NR            | 515    | 373                      | NR            | 645    | 204                      | NR            | 775    | 4                        | NR            | 905    | 0                        | NR            |
| 390    | 0                        | NR            | 520    | 414                      | NR            | 650    | 179                      | NR            | 780    | 4                        | NR            | 910    | 0                        | NR            |
| 395    | 1                        | NR            | 525    | 445                      | NR            | 655    | 157                      | NR            | 785    | 3                        | NR            | 915    | 0                        | NR            |
| 400    | 3                        | NR            | 530    | 465                      | NR            | 660    | 136                      | NR            | 790    | 3                        | NR            | 920    | 0                        | NR            |
| 405    | 5                        | NR            | 535    | 482                      | NR            | 665    | 118                      | NR            | 795    | 2                        | NR            | 925    | 0                        | NR            |
| 410    | 9                        | NR            | 540    | 493                      | NR            | 670    | 102                      | NR            | 800    | 2                        | NR            | 930    | 0                        | NR            |
| 415    | 18                       | NR            | 545    | 505                      | NR            | 675    | 87                       | NR            | 805    | 2                        | NR            | 935    | 0                        | NR            |
| 420    | 36                       | NR            | 550    | 515                      | NR            | 680    | 75                       | NR            | 810    | 2                        | NR            | 940    | 0                        | NR            |
| 425    | 72                       | NR            | 555    | 527                      | NR            | 685    | 65                       | NR            | 815    | 1                        | NR            | 945    | 0                        | NR            |
| 430    | 134                      | NR            | 560    | 540                      | NR            | 690    | 56                       | NR            | 820    | 1                        | NR            | 950    | 0                        | NR            |
| 435    | 242                      | NR            | 565    | 550                      | NR            | 695    | 48                       | NR            | 825    | 1                        | NR            | 955    | 0                        | NR            |
| 440    | 407                      | NR            | 570    | 557                      | NR            | 700    | 41                       | NR            | 830    | 1                        | NR            | 960    | 0                        | NR            |
| 445    | 684                      | NR            | 575    | 561                      | NR            | 705    | 35                       | NR            | 835    | 1                        | NR            | 965    | 0                        | NR            |
| 450    | 988                      | NR            | 580    | 559                      | NR            | 710    | 30                       | NR            | 840    | 1                        | NR            | 970    | 0                        | NR            |
| 455    | 828                      | NR            | 585    | 551                      | NR            | 715    | 26                       | NR            | 845    | 1                        | NR            | 975    | 0                        | NR            |
| 460    | 473                      | NR            | 590    | 537                      | NR            | 720    | 22                       | NR            | 850    | 1                        | NR            | 980    | 0                        | NR            |
| 465    | 333                      | NR            | 595    | 516                      | NR            | 725    | 19                       | NR            | 855    | 0                        | NR            | 985    | 0                        | NR            |
| 470    | 232                      | NR            | 600    | 491                      | NR            | 730    | 16                       | NR            | 860    | 0                        | NR            | 990    | 0                        | NR            |
| 475    | 146                      | NR            | 605    | 461                      | NR            | 735    | 14                       | NR            | 865    | 0                        | NR            | 995    | 0                        | NR            |
| 480    | 113                      | NR            | 610    | 429                      | NR            | 740    | 12                       | NR            | 870    | 0                        | NR            | 1000   | 0                        | NR            |
| 485    | 106                      | NR            | 615    | 395                      | NR            | 745    | 10                       | NR            | 875    | 0                        | NR            |        |                          |               |

REPORT NUMBER: SP1-2407-157-6

**Scotopic Flux vs. Wavelength**



**Scotopic Lumens: NR**

**S/P: 1.81**

| λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360    | 0                        | NR            | 490    | 114                      | NR            | 620    | 361                      | NR            | 750    | 9                        | NR            | 880    | 0                        | NR            |
| 365    | 0                        | NR            | 495    | 145                      | NR            | 625    | 326                      | NR            | 755    | 8                        | NR            | 885    | 0                        | NR            |
| 370    | 0                        | NR            | 500    | 197                      | NR            | 630    | 294                      | NR            | 760    | 7                        | NR            | 890    | 0                        | NR            |
| 375    | 0                        | NR            | 505    | 259                      | NR            | 635    | 261                      | NR            | 765    | 6                        | NR            | 895    | 0                        | NR            |
| 380    | 0                        | NR            | 510    | 319                      | NR            | 640    | 232                      | NR            | 770    | 5                        | NR            | 900    | 0                        | NR            |
| 385    | 0                        | NR            | 515    | 373                      | NR            | 645    | 204                      | NR            | 775    | 4                        | NR            | 905    | 0                        | NR            |
| 390    | 0                        | NR            | 520    | 414                      | NR            | 650    | 179                      | NR            | 780    | 4                        | NR            | 910    | 0                        | NR            |
| 395    | 1                        | NR            | 525    | 445                      | NR            | 655    | 157                      | NR            | 785    | 3                        | NR            | 915    | 0                        | NR            |
| 400    | 3                        | NR            | 530    | 465                      | NR            | 660    | 136                      | NR            | 790    | 3                        | NR            | 920    | 0                        | NR            |
| 405    | 5                        | NR            | 535    | 482                      | NR            | 665    | 118                      | NR            | 795    | 2                        | NR            | 925    | 0                        | NR            |
| 410    | 9                        | NR            | 540    | 493                      | NR            | 670    | 102                      | NR            | 800    | 2                        | NR            | 930    | 0                        | NR            |
| 415    | 18                       | NR            | 545    | 505                      | NR            | 675    | 87                       | NR            | 805    | 2                        | NR            | 935    | 0                        | NR            |
| 420    | 36                       | NR            | 550    | 515                      | NR            | 680    | 75                       | NR            | 810    | 2                        | NR            | 940    | 0                        | NR            |
| 425    | 72                       | NR            | 555    | 527                      | NR            | 685    | 65                       | NR            | 815    | 1                        | NR            | 945    | 0                        | NR            |
| 430    | 134                      | NR            | 560    | 540                      | NR            | 690    | 56                       | NR            | 820    | 1                        | NR            | 950    | 0                        | NR            |
| 435    | 242                      | NR            | 565    | 550                      | NR            | 695    | 48                       | NR            | 825    | 1                        | NR            | 955    | 0                        | NR            |
| 440    | 407                      | NR            | 570    | 557                      | NR            | 700    | 41                       | NR            | 830    | 1                        | NR            | 960    | 0                        | NR            |
| 445    | 684                      | NR            | 575    | 561                      | NR            | 705    | 35                       | NR            | 835    | 1                        | NR            | 965    | 0                        | NR            |
| 450    | 988                      | NR            | 580    | 559                      | NR            | 710    | 30                       | NR            | 840    | 1                        | NR            | 970    | 0                        | NR            |
| 455    | 828                      | NR            | 585    | 551                      | NR            | 715    | 26                       | NR            | 845    | 1                        | NR            | 975    | 0                        | NR            |
| 460    | 473                      | NR            | 590    | 537                      | NR            | 720    | 22                       | NR            | 850    | 1                        | NR            | 980    | 0                        | NR            |
| 465    | 333                      | NR            | 595    | 516                      | NR            | 725    | 19                       | NR            | 855    | 0                        | NR            | 985    | 0                        | NR            |
| 470    | 232                      | NR            | 600    | 491                      | NR            | 730    | 16                       | NR            | 860    | 0                        | NR            | 990    | 0                        | NR            |
| 475    | 146                      | NR            | 605    | 461                      | NR            | 735    | 14                       | NR            | 865    | 0                        | NR            | 995    | 0                        | NR            |
| 480    | 113                      | NR            | 610    | 429                      | NR            | 740    | 12                       | NR            | 870    | 0                        | NR            | 1000   | 0                        | NR            |
| 485    | 106                      | NR            | 615    | 395                      | NR            | 745    | 10                       | NR            | 875    | 0                        | NR            |        |                          |               |

REPORT NUMBER: SP1-2407-157-6

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 3.73

| λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) | λ (nm) | Power W <sup>^</sup> /nm | Lumens (φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360    | 0                        | NR            | 490    | 114                      | NR            | 620    | 361                      | NR            | 750    | 9                        | NR            | 880    | 0                        | NR            |
| 365    | 0                        | NR            | 495    | 145                      | NR            | 625    | 326                      | NR            | 755    | 8                        | NR            | 885    | 0                        | NR            |
| 370    | 0                        | NR            | 500    | 197                      | NR            | 630    | 294                      | NR            | 760    | 7                        | NR            | 890    | 0                        | NR            |
| 375    | 0                        | NR            | 505    | 259                      | NR            | 635    | 261                      | NR            | 765    | 6                        | NR            | 895    | 0                        | NR            |
| 380    | 0                        | NR            | 510    | 319                      | NR            | 640    | 232                      | NR            | 770    | 5                        | NR            | 900    | 0                        | NR            |
| 385    | 0                        | NR            | 515    | 373                      | NR            | 645    | 204                      | NR            | 775    | 4                        | NR            | 905    | 0                        | NR            |
| 390    | 0                        | NR            | 520    | 414                      | NR            | 650    | 179                      | NR            | 780    | 4                        | NR            | 910    | 0                        | NR            |
| 395    | 1                        | NR            | 525    | 445                      | NR            | 655    | 157                      | NR            | 785    | 3                        | NR            | 915    | 0                        | NR            |
| 400    | 3                        | NR            | 530    | 465                      | NR            | 660    | 136                      | NR            | 790    | 3                        | NR            | 920    | 0                        | NR            |
| 405    | 5                        | NR            | 535    | 482                      | NR            | 665    | 118                      | NR            | 795    | 2                        | NR            | 925    | 0                        | NR            |
| 410    | 9                        | NR            | 540    | 493                      | NR            | 670    | 102                      | NR            | 800    | 2                        | NR            | 930    | 0                        | NR            |
| 415    | 18                       | NR            | 545    | 505                      | NR            | 675    | 87                       | NR            | 805    | 2                        | NR            | 935    | 0                        | NR            |
| 420    | 36                       | NR            | 550    | 515                      | NR            | 680    | 75                       | NR            | 810    | 2                        | NR            | 940    | 0                        | NR            |
| 425    | 72                       | NR            | 555    | 527                      | NR            | 685    | 65                       | NR            | 815    | 1                        | NR            | 945    | 0                        | NR            |
| 430    | 134                      | NR            | 560    | 540                      | NR            | 690    | 56                       | NR            | 820    | 1                        | NR            | 950    | 0                        | NR            |
| 435    | 242                      | NR            | 565    | 550                      | NR            | 695    | 48                       | NR            | 825    | 1                        | NR            | 955    | 0                        | NR            |
| 440    | 407                      | NR            | 570    | 557                      | NR            | 700    | 41                       | NR            | 830    | 1                        | NR            | 960    | 0                        | NR            |
| 445    | 684                      | NR            | 575    | 561                      | NR            | 705    | 35                       | NR            | 835    | 1                        | NR            | 965    | 0                        | NR            |
| 450    | 988                      | NR            | 580    | 559                      | NR            | 710    | 30                       | NR            | 840    | 1                        | NR            | 970    | 0                        | NR            |
| 455    | 828                      | NR            | 585    | 551                      | NR            | 715    | 26                       | NR            | 845    | 1                        | NR            | 975    | 0                        | NR            |
| 460    | 473                      | NR            | 590    | 537                      | NR            | 720    | 22                       | NR            | 850    | 1                        | NR            | 980    | 0                        | NR            |
| 465    | 333                      | NR            | 595    | 516                      | NR            | 725    | 19                       | NR            | 855    | 0                        | NR            | 985    | 0                        | NR            |
| 470    | 232                      | NR            | 600    | 491                      | NR            | 730    | 16                       | NR            | 860    | 0                        | NR            | 990    | 0                        | NR            |
| 475    | 146                      | NR            | 605    | 461                      | NR            | 735    | 14                       | NR            | 865    | 0                        | NR            | 995    | 0                        | NR            |
| 480    | 113                      | NR            | 610    | 429                      | NR            | 740    | 12                       | NR            | 870    | 0                        | NR            | 1000   | 0                        | NR            |
| 485    | 106                      | NR            | 615    | 395                      | NR            | 745    | 10                       | NR            | 875    | 0                        | NR            |        |                          |               |

**Summary**

$R_f = 73.7$   
 $R_g = 93$   
 $CIE R_a = 72.0$   
 $R_9 = -39.6$




**Color Vector Graphics**




**Individual Sample Fidelity Index ( $R_{f,i}$ )**

|            |            |            |            |
|------------|------------|------------|------------|
| CES01 = 85 | CES26 = 62 | CES51 = 90 | CES76 = 50 |
| CES02 = 59 | CES27 = 88 | CES52 = 89 | CES77 = 67 |
| CES03 = 30 | CES28 = 80 | CES53 = 79 | CES78 = 53 |
| CES04 = 69 | CES29 = 69 | CES54 = 84 | CES79 = 80 |
| CES05 = 46 | CES30 = 88 | CES55 = 83 | CES80 = 77 |
| CES06 = 50 | CES31 = 72 | CES56 = 74 | CES81 = 78 |
| CES07 = 38 | CES32 = 62 | CES57 = 73 | CES82 = 90 |
| CES08 = 38 | CES33 = 82 | CES58 = 73 | CES83 = 90 |
| CES09 = 29 | CES34 = 69 | CES59 = 86 | CES84 = 85 |
| CES10 = 72 | CES35 = 83 | CES60 = 88 | CES85 = 77 |
| CES11 = 56 | CES36 = 87 | CES61 = 82 | CES86 = 75 |
| CES12 = 61 | CES37 = 78 | CES62 = 81 | CES87 = 76 |
| CES13 = 41 | CES38 = 98 | CES63 = 73 | CES88 = 81 |
| CES14 = 74 | CES39 = 96 | CES64 = 63 | CES89 = 72 |
| CES15 = 70 | CES40 = 91 | CES65 = 60 | CES90 = 80 |
| CES16 = 46 | CES41 = 96 | CES66 = 56 | CES91 = 71 |
| CES17 = 49 | CES42 = 79 | CES67 = 53 | CES92 = 58 |
| CES18 = 55 | CES43 = 78 | CES68 = 63 | CES93 = 74 |
| CES19 = 71 | CES44 = 99 | CES69 = 72 | CES94 = 52 |
| CES20 = 63 | CES45 = 86 | CES70 = 55 | CES95 = 64 |
| CES21 = 85 | CES46 = 85 | CES71 = 46 | CES96 = 76 |
| CES22 = 77 | CES47 = 89 | CES72 = 82 | CES97 = 86 |
| CES23 = 91 | CES48 = 80 | CES73 = 45 | CES98 = 76 |
| CES24 = 90 | CES49 = 83 | CES74 = 90 | CES99 = 62 |
| CES25 = 71 | CES50 = 89 | CES75 = 48 |            |


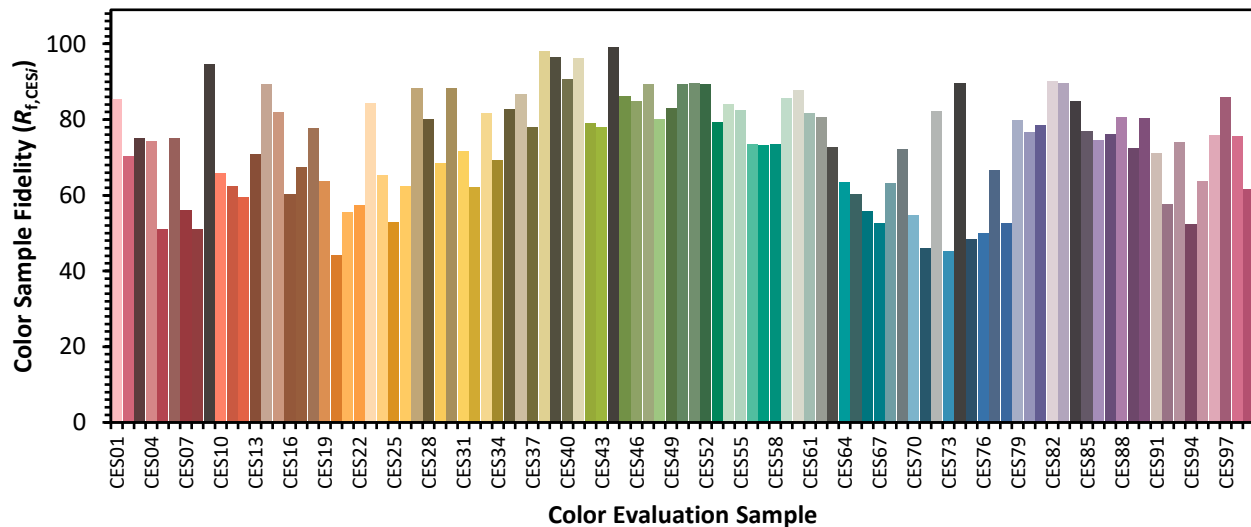




Color Rendition by Hue-Angle Bin

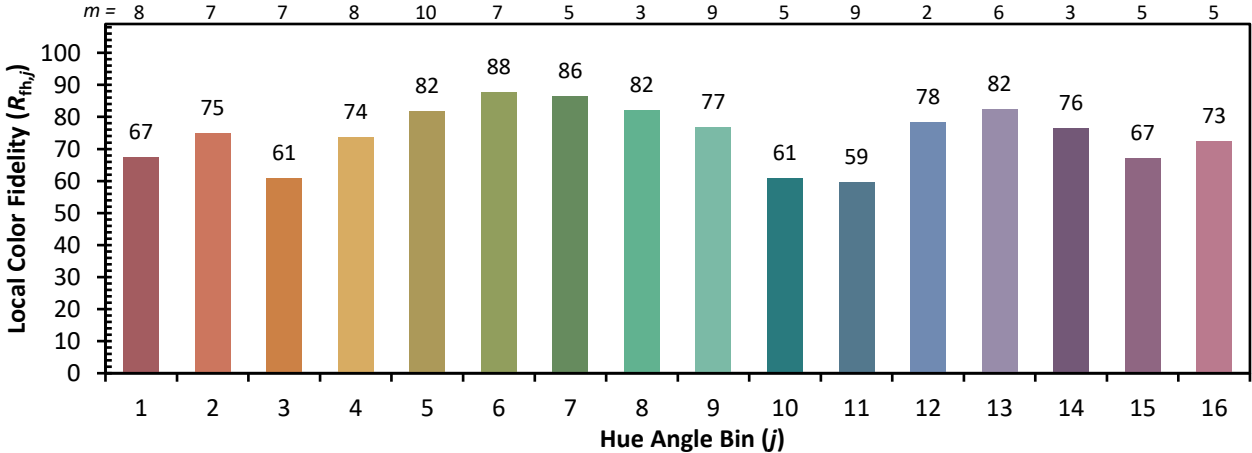

Measure Comparisons

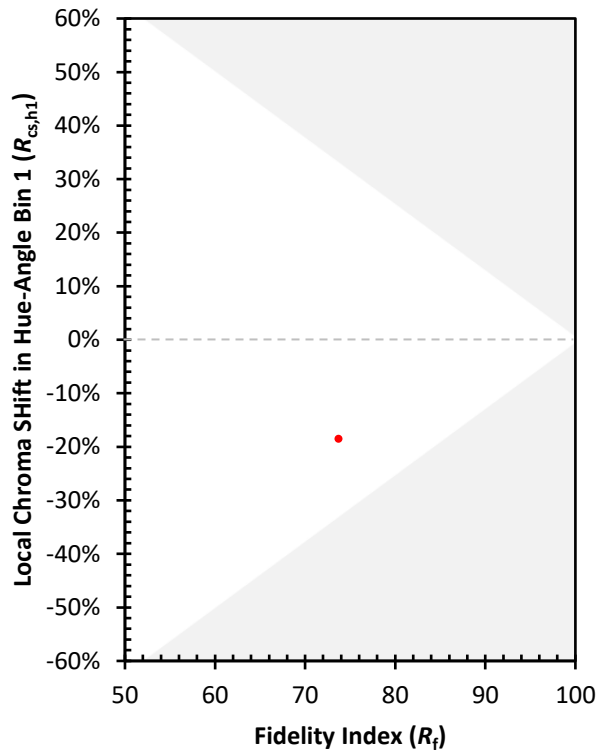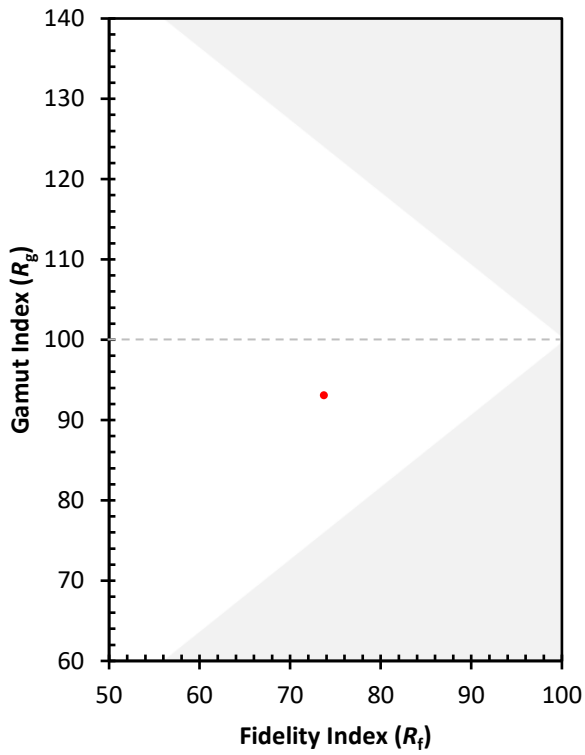

(END OF REPORT)