

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331759-927

Luminaire Tested: **SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331759-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6432.9 lumens
Efficiency: N/A
Efficacy: 89.7 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

Luminous Intensity Polar Plot

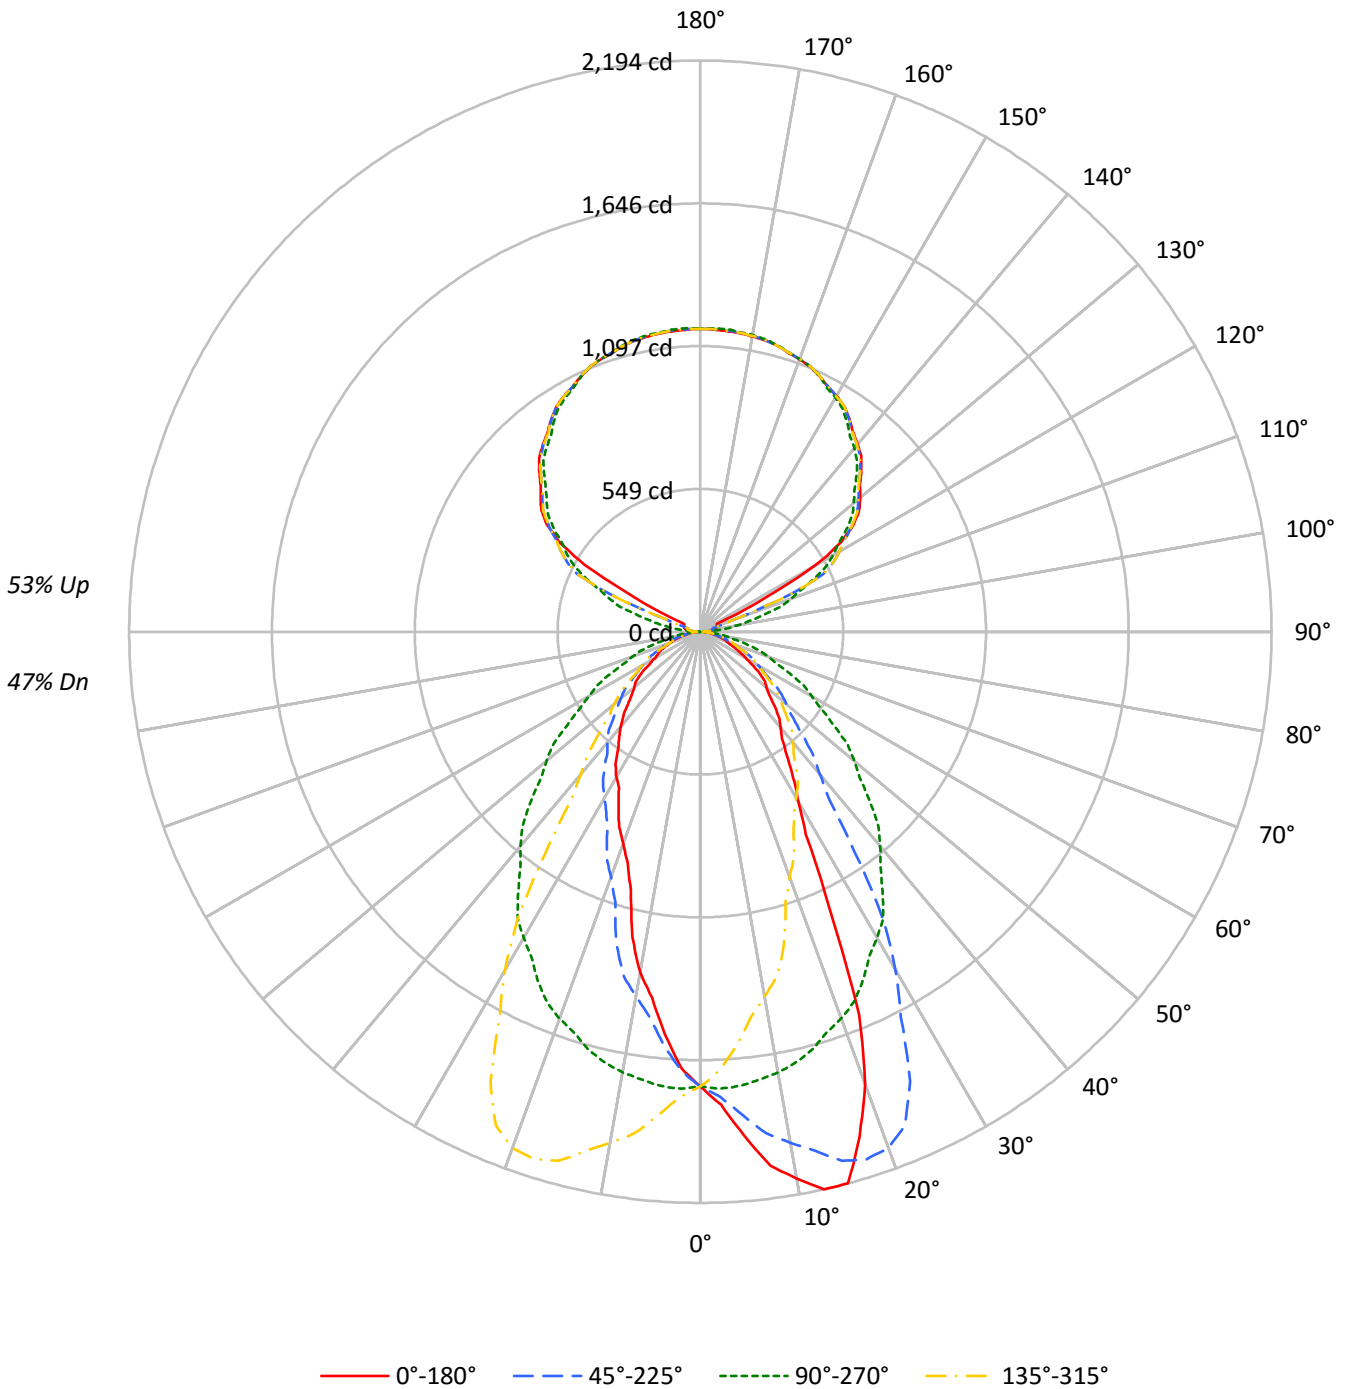



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 106 | 106 | 106 | 106 | 98 | 98 | 98 | 98 | 82 | 82 | 82 | 67 | 67 | 67 | 53 | 53 | 53 | 47 |
| 1 | 98 | 94 | 90 | 87 | 90 | 86 | 83 | 81 | 73 | 70 | 68 | 60 | 58 | 57 | 48 | 47 | 46 | 41 |
| 2 | 90 | 83 | 77 | 72 | 82 | 76 | 72 | 67 | 65 | 61 | 58 | 54 | 51 | 49 | 43 | 42 | 40 | 36 |
| 3 | 82 | 73 | 67 | 61 | 76 | 68 | 62 | 57 | 58 | 53 | 50 | 48 | 45 | 42 | 39 | 37 | 35 | 31 |
| 4 | 76 | 66 | 58 | 52 | 70 | 61 | 54 | 49 | 52 | 47 | 43 | 43 | 40 | 37 | 36 | 33 | 31 | 27 |
| 5 | 70 | 59 | 51 | 46 | 64 | 55 | 48 | 43 | 47 | 42 | 38 | 39 | 36 | 33 | 33 | 30 | 28 | 24 |
| 6 | 65 | 53 | 45 | 40 | 59 | 49 | 43 | 38 | 42 | 37 | 33 | 36 | 32 | 29 | 30 | 27 | 25 | 22 |
| 7 | 60 | 48 | 41 | 35 | 55 | 45 | 38 | 34 | 39 | 34 | 30 | 33 | 29 | 26 | 28 | 25 | 22 | 20 |
| 8 | 56 | 44 | 37 | 32 | 51 | 41 | 35 | 30 | 36 | 30 | 27 | 30 | 26 | 24 | 26 | 23 | 20 | 18 |
| 9 | 52 | 40 | 33 | 28 | 48 | 38 | 31 | 27 | 33 | 28 | 24 | 28 | 24 | 21 | 24 | 21 | 19 | 17 |
| 10 | 49 | 37 | 30 | 26 | 45 | 35 | 29 | 25 | 30 | 25 | 22 | 26 | 22 | 20 | 22 | 19 | 17 | 15 |

AVERAGE LUMINANCE (cd/sqm):

| | 0° | 90° | 180° | 270° |
|-----|-------|-------|-------|-------|
| 0° | 28208 | 28208 | 28208 | 28208 |
| 5° | 31504 | 28386 | 25167 | 28386 |
| 10° | 34954 | 28186 | 21815 | 28186 |
| 15° | 36672 | 27773 | 17188 | 27773 |
| 20° | 31792 | 27161 | 14874 | 27161 |
| 25° | 20851 | 26323 | 13279 | 26323 |
| 30° | 14033 | 25307 | 12020 | 25307 |
| 35° | 11367 | 24025 | 10841 | 24025 |
| 40° | 10108 | 22634 | 10030 | 22634 |
| 45° | 9149 | 21000 | 8953 | 21000 |
| 50° | 8324 | 19381 | 8297 | 19381 |
| 55° | 7828 | 17582 | 7724 | 17582 |
| 60° | 6546 | 15936 | 6468 | 15936 |
| 65° | 5521 | 14472 | 6262 | 14472 |
| 70° | 5103 | 12925 | 5906 | 12925 |
| 75° | 4772 | 11248 | 5452 | 11248 |
| 80° | 4407 | 9261 | 4854 | 9261 |
| 85° | 4057 | 7317 | 4279 | 7317 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 165.6 | 2.6 |
| 10°-20° | 461.5 | 7.2 |
| 20°-30° | 594.7 | 9.2 |
| 30°-40° | 565.1 | 8.8 |
| 40°-50° | 484.1 | 7.5 |
| 50°-60° | 368.7 | 5.7 |
| 60°-70° | 233.1 | 3.6 |
| 70°-80° | 116.4 | 1.8 |
| 80°-90° | 33.2 | 0.5 |
| 90°-100° | 38.8 | 0.6 |
| 100°-110° | 142.4 | 2.2 |
| 110°-120° | 380.6 | 5.9 |
| 120°-130° | 628.2 | 9.8 |
| 130°-140° | 668.1 | 10.4 |
| 140°-150° | 620.9 | 9.7 |
| 150°-160° | 499.2 | 7.8 |
| 160°-170° | 321.7 | 5.0 |
| 170°-180° | 110.7 | 1.7 |
| 0°-30° | 1221.8 | 19.0 |
| 0°-40° | 1786.9 | 27.8 |
| 0°-60° | 2639.7 | 41.0 |
| 0°-90° | 3022.3 | 47.0 |
| 90°-120° | 561.7 | 8.7 |
| 90°-150° | 2478.9 | 38.5 |
| 90°-180° | 3411.0 | 53.0 |
| 0°-180° | 6432.9 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | 90° | 180° | 270° | 360° | Flux |
|------|------|------|------|------|------|------|
| 0° | 1747 | 1747 | 1747 | 1747 | 1747 | |
| 5° | 1944 | 1751 | 1553 | 1751 | 1944 | 192 |
| 15° | 2194 | 1662 | 1028 | 1662 | 2194 | 592 |
| 25° | 1170 | 1478 | 745 | 1478 | 1170 | 555 |
| 35° | 577 | 1219 | 550 | 1219 | 577 | 369 |
| 45° | 401 | 920 | 392 | 920 | 401 | 310 |
| 55° | 278 | 625 | 274 | 625 | 278 | 244 |
| 65° | 144 | 379 | 164 | 379 | 144 | 147 |
| 75° | 76 | 180 | 87 | 180 | 76 | 81 |
| 85° | 22 | 40 | 23 | 40 | 22 | 24 |
| 90° | 23 | 1 | 23 | 1 | 23 | 11 |
| 95° | 36 | 55 | 36 | 55 | 36 | 34 |
| 105° | 64 | 256 | 64 | 256 | 64 | 67 |
| 115° | 69 | 484 | 69 | 484 | 69 | 173 |
| 125° | 720 | 685 | 720 | 685 | 720 | 623 |
| 135° | 875 | 847 | 875 | 847 | 875 | 674 |
| 145° | 998 | 983 | 998 | 983 | 998 | 624 |
| 155° | 1083 | 1082 | 1083 | 1082 | 1083 | 500 |
| 165° | 1138 | 1140 | 1138 | 1140 | 1138 | 321 |
| 175° | 1160 | 1166 | 1160 | 1166 | 1160 | 110 |
| 180° | 1164 | 1164 | 1164 | 1164 | 1164 | |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

| | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 |
| 2.5° | 1818.0 | 1819.5 | 1820.9 | 1817.5 | 1817.5 | 1814.6 | 1808.3 | 1803.4 | 1789.9 | 1787.9 | 1787.9 |
| 5° | 1943.8 | 1942.6 | 1945.0 | 1937.1 | 1926.2 | 1923.7 | 1912.2 | 1897.0 | 1881.3 | 1863.7 | 1860.0 |
| 7.5° | 2068.9 | 2067.0 | 2062.1 | 2060.9 | 2052.5 | 2034.1 | 2015.5 | 1995.7 | 1969.5 | 1943.9 | 1931.0 |
| 10° | 2132.0 | 2152.0 | 2139.8 | 2118.6 | 2122.9 | 2094.4 | 2079.2 | 2053.1 | 2031.2 | 1993.0 | 1984.5 |
| 12.5° | 2194.1 | 2202.0 | 2198.1 | 2186.1 | 2180.6 | 2160.8 | 2140.3 | 2117.7 | 2077.3 | 2043.0 | 2013.1 |
| 15° | 2193.9 | 2205.4 | 2208.4 | 2204.8 | 2207.9 | 2206.6 | 2195.7 | 2176.9 | 2141.7 | 2104.0 | 2071.2 |
| 17.5° | 2031.9 | 2039.9 | 2059.8 | 2073.3 | 2090.3 | 2126.3 | 2144.0 | 2150.9 | 2145.7 | 2124.2 | 2101.1 |
| 20° | 1850.3 | 1836.9 | 1892.8 | 1921.4 | 1945.6 | 2006.3 | 2058.5 | 2078.5 | 2110.7 | 2110.1 | 2104.0 |
| 22.5° | 1592.9 | 1596.1 | 1649.0 | 1682.9 | 1753.8 | 1814.5 | 1874.0 | 1949.4 | 2011.7 | 2052.8 | 2076.9 |
| 25° | 1170.4 | 1193.5 | 1246.3 | 1292.4 | 1371.3 | 1484.2 | 1586.8 | 1705.8 | 1818.1 | 1906.8 | 1991.2 |
| 27.5° | 879.0 | 880.7 | 922.6 | 965.2 | 1012.1 | 1104.6 | 1233.7 | 1375.9 | 1536.0 | 1668.1 | 1820.0 |
| 30° | 752.7 | 749.1 | 766.7 | 792.8 | 832.9 | 904.5 | 1001.6 | 1141.3 | 1300.9 | 1500.0 | 1677.3 |
| 32.5° | 663.4 | 663.6 | 676.8 | 696.2 | 729.4 | 777.8 | 844.3 | 957.7 | 1108.6 | 1304.3 | 1512.2 |
| 35° | 576.7 | 576.1 | 585.8 | 599.8 | 613.7 | 644.7 | 690.2 | 749.7 | 853.5 | 1036.3 | 1248.7 |
| 37.5° | 514.5 | 517.2 | 522.0 | 530.7 | 546.1 | 563.3 | 590.7 | 630.6 | 704.6 | 812.6 | 991.2 |
| 40° | 479.6 | 480.8 | 487.4 | 494.7 | 503.8 | 517.2 | 539.6 | 571.9 | 625.9 | 712.1 | 842.6 |
| 42.5° | 447.5 | 448.8 | 453.4 | 460.3 | 467.5 | 480.8 | 499.4 | 527.2 | 571.0 | 638.3 | 745.9 |
| 45° | 400.7 | 400.7 | 404.9 | 408.0 | 415.8 | 427.9 | 443.1 | 466.2 | 496.5 | 546.4 | 618.0 |
| 47.5° | 356.7 | 356.8 | 359.7 | 364.9 | 369.8 | 379.3 | 394.2 | 413.0 | 435.1 | 473.6 | 534.8 |
| 50° | 331.4 | 332.1 | 333.9 | 338.1 | 341.2 | 349.7 | 361.2 | 377.6 | 400.7 | 430.4 | 481.4 |
| 52.5° | 311.1 | 310.7 | 313.0 | 314.8 | 316.9 | 323.0 | 331.6 | 346.0 | 366.6 | 392.5 | 434.7 |
| 55° | 278.1 | 275.6 | 279.2 | 282.3 | 284.1 | 286.5 | 291.4 | 300.5 | 318.1 | 339.9 | 371.5 |
| 57.5° | 236.8 | 235.8 | 238.4 | 241.1 | 246.8 | 253.4 | 257.5 | 263.3 | 272.4 | 288.1 | 319.4 |
| 60° | 202.7 | 202.7 | 208.2 | 210.0 | 216.7 | 225.2 | 233.7 | 238.6 | 247.7 | 258.0 | 281.1 |
| 62.5° | 172.6 | 173.2 | 175.7 | 177.5 | 181.3 | 191.7 | 203.6 | 214.3 | 222.9 | 232.7 | 248.0 |
| 65° | 144.5 | 145.7 | 145.7 | 146.9 | 149.3 | 151.8 | 156.6 | 165.1 | 180.3 | 194.2 | 205.8 |
| 67.5° | 122.6 | 123.0 | 123.3 | 124.5 | 125.2 | 127.9 | 129.8 | 133.6 | 137.0 | 150.3 | 164.6 |
| 70° | 108.1 | 109.9 | 109.2 | 110.5 | 111.1 | 112.3 | 114.7 | 116.5 | 122.0 | 125.1 | 133.6 |
| 72.5° | 94.4 | 95.8 | 95.7 | 96.4 | 98.0 | 98.2 | 100.1 | 102.0 | 105.5 | 108.1 | 112.6 |
| 75° | 76.5 | 75.9 | 76.5 | 77.7 | 78.3 | 78.9 | 78.9 | 81.4 | 83.2 | 85.6 | 88.6 |
| 77.5° | 59.0 | 59.7 | 59.5 | 59.7 | 59.7 | 60.8 | 60.7 | 61.8 | 63.6 | 64.8 | 66.3 |
| 80° | 47.4 | 47.9 | 47.4 | 47.9 | 48.6 | 49.2 | 48.6 | 49.2 | 51.0 | 52.2 | 52.2 |
| 82.5° | 36.7 | 36.8 | 37.2 | 37.3 | 37.4 | 37.5 | 38.3 | 38.5 | 39.8 | 39.6 | 40.1 |
| 85° | 21.9 | 21.2 | 21.2 | 21.2 | 21.9 | 22.5 | 21.9 | 21.9 | 22.5 | 22.5 | 22.5 |
| 87.5° | 12.3 | 12.8 | 12.7 | 12.6 | 12.5 | 12.4 | 12.2 | 12.5 | 11.8 | 12.1 | 11.3 |
| 90° | 22.7 | 22.3 | 22.0 | 21.6 | 21.2 | 20.6 | 19.6 | 18.7 | 17.7 | 16.9 | 15.4 |
| 92.5° | 22.7 | 22.5 | 22.3 | 22.1 | 21.9 | 21.5 | 21.0 | 20.5 | 20.0 | 19.6 | 18.8 |
| 95° | 36.2 | 36.4 | 36.6 | 36.8 | 37.0 | 36.6 | 35.6 | 34.7 | 33.7 | 32.9 | 31.5 |
| 97.5° | 48.3 | 48.1 | 47.9 | 47.7 | 47.5 | 47.0 | 46.2 | 45.5 | 44.7 | 44.0 | 41.0 |
| 100° | 56.4 | 56.1 | 55.7 | 55.3 | 54.9 | 54.0 | 52.5 | 51.0 | 49.5 | 48.0 | 44.8 |
| 102.5° | 60.4 | 60.0 | 59.4 | 58.9 | 58.4 | 57.1 | 55.2 | 53.2 | 51.3 | 49.4 | 76.0 |
| 105° | 64.0 | 63.2 | 62.5 | 61.8 | 61.0 | 59.6 | 57.5 | 55.5 | 53.4 | 51.3 | 102.4 |
| 107.5° | 65.8 | 65.1 | 64.3 | 63.6 | 62.9 | 63.5 | 65.6 | 67.7 | 69.8 | 71.9 | 133.2 |
| 110° | 66.5 | 65.8 | 65.0 | 64.2 | 63.5 | 72.5 | 91.3 | 110.0 | 128.7 | 147.3 | 201.5 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 112.5° | 67.2 | 66.6 | 66.0 | 65.4 | 64.8 | 98.6 | 166.9 | 235.2 | 303.5 | 371.7 | 385.1 |
| 115° | 69.1 | 82.5 | 96.0 | 109.5 | 122.9 | 173.0 | 259.7 | 346.3 | 432.9 | 519.6 | 514.9 |
| 117.5° | 281.9 | 326.2 | 370.5 | 414.8 | 459.1 | 491.7 | 512.6 | 533.6 | 554.5 | 575.5 | 572.3 |
| 120° | 513.7 | 538.9 | 564.2 | 589.5 | 614.7 | 626.3 | 624.0 | 621.8 | 619.5 | 617.3 | 613.9 |
| 122.5° | 641.0 | 645.9 | 650.9 | 655.8 | 660.6 | 662.4 | 661.1 | 659.7 | 658.4 | 657.0 | 653.4 |
| 125° | 720.0 | 719.5 | 718.9 | 718.4 | 717.8 | 716.8 | 715.5 | 714.2 | 712.9 | 711.6 | 708.1 |
| 127.5° | 769.8 | 769.8 | 769.7 | 769.5 | 769.4 | 768.4 | 766.5 | 764.6 | 762.7 | 760.8 | 758.1 |
| 130° | 800.9 | 801.1 | 801.2 | 801.5 | 801.6 | 800.7 | 798.6 | 796.5 | 794.5 | 792.4 | 790.4 |
| 132.5° | 831.2 | 831.4 | 831.6 | 831.7 | 831.9 | 831.2 | 829.4 | 827.6 | 825.9 | 824.1 | 822.0 |
| 135° | 875.0 | 875.4 | 875.7 | 876.1 | 876.5 | 875.7 | 873.9 | 872.0 | 870.1 | 868.2 | 866.6 |
| 137.5° | 914.9 | 915.5 | 916.2 | 916.8 | 917.4 | 916.8 | 915.0 | 913.1 | 911.3 | 909.5 | 907.6 |
| 140° | 939.8 | 940.7 | 941.7 | 942.6 | 943.6 | 943.2 | 941.5 | 939.8 | 938.1 | 936.4 | 934.4 |
| 142.5° | 964.1 | 965.0 | 965.9 | 966.9 | 967.8 | 967.5 | 966.0 | 964.4 | 962.9 | 961.4 | 959.0 |
| 145° | 997.9 | 998.9 | 999.8 | 1000.8 | 1001.6 | 1001.5 | 1000.1 | 998.9 | 997.5 | 996.2 | 993.1 |
| 147.5° | 1027.7 | 1028.5 | 1029.3 | 1030.1 | 1030.9 | 1030.8 | 1029.8 | 1028.8 | 1027.9 | 1026.9 | 1023.7 |
| 150° | 1045.9 | 1046.9 | 1047.8 | 1048.7 | 1049.6 | 1049.6 | 1048.5 | 1047.3 | 1046.2 | 1045.0 | 1042.1 |
| 152.5° | 1061.4 | 1062.6 | 1063.9 | 1065.1 | 1066.4 | 1066.4 | 1065.3 | 1064.1 | 1063.0 | 1061.9 | 1059.1 |
| 155° | 1083.0 | 1084.5 | 1086.0 | 1087.4 | 1088.9 | 1089.2 | 1088.1 | 1086.9 | 1085.8 | 1084.7 | 1082.4 |
| 157.5° | 1102.6 | 1104.1 | 1105.6 | 1107.1 | 1108.5 | 1108.6 | 1107.3 | 1106.0 | 1104.8 | 1103.5 | 1101.9 |
| 160° | 1114.1 | 1115.5 | 1116.7 | 1118.1 | 1119.4 | 1119.4 | 1118.3 | 1117.2 | 1116.1 | 1115.0 | 1113.9 |
| 162.5° | 1123.6 | 1125.1 | 1126.8 | 1128.4 | 1130.0 | 1130.2 | 1128.9 | 1127.6 | 1126.3 | 1125.1 | 1124.1 |
| 165° | 1137.7 | 1139.0 | 1140.3 | 1141.6 | 1143.0 | 1143.0 | 1141.6 | 1140.3 | 1139.0 | 1137.7 | 1137.2 |
| 167.5° | 1146.6 | 1148.3 | 1150.0 | 1151.7 | 1153.3 | 1153.6 | 1152.2 | 1151.0 | 1149.6 | 1148.3 | 1147.8 |
| 170° | 1152.0 | 1153.7 | 1155.4 | 1157.1 | 1158.7 | 1159.0 | 1157.6 | 1156.3 | 1155.0 | 1153.7 | 1153.3 |
| 172.5° | 1156.0 | 1157.8 | 1159.4 | 1161.1 | 1162.8 | 1163.0 | 1161.7 | 1160.4 | 1159.0 | 1157.8 | 1157.4 |
| 175° | 1159.6 | 1161.5 | 1163.3 | 1165.2 | 1167.1 | 1167.4 | 1166.1 | 1164.7 | 1163.5 | 1162.1 | 1161.7 |
| 177.5° | 1161.8 | 1163.2 | 1164.5 | 1165.9 | 1167.2 | 1167.4 | 1166.3 | 1165.2 | 1164.2 | 1163.2 | 1163.0 |
| 180° | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | 100° | 105° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 |
| 2.5° | 1788.9 | 1784.9 | 1781.6 | 1772.8 | 1768.5 | 1758.7 | 1757.3 | 1756.8 | 1744.2 | 1732.0 | 1728.6 |
| 5° | 1850.3 | 1840.6 | 1826.1 | 1809.0 | 1791.4 | 1773.2 | 1761.1 | 1751.4 | 1727.0 | 1704.0 | 1690.7 |
| 7.5° | 1912.2 | 1891.3 | 1866.2 | 1834.1 | 1807.2 | 1777.1 | 1754.8 | 1734.7 | 1700.3 | 1667.2 | 1645.0 |
| 10° | 1958.4 | 1924.4 | 1890.9 | 1846.7 | 1812.0 | 1778.1 | 1746.5 | 1719.2 | 1680.3 | 1636.6 | 1605.7 |
| 12.5° | 1987.0 | 1949.6 | 1903.6 | 1860.3 | 1815.4 | 1772.3 | 1730.0 | 1694.9 | 1649.2 | 1604.1 | 1567.3 |
| 15° | 2025.8 | 1985.7 | 1929.8 | 1867.9 | 1810.2 | 1753.8 | 1705.3 | 1661.5 | 1602.0 | 1548.0 | 1503.1 |
| 17.5° | 2057.5 | 2002.3 | 1942.4 | 1870.7 | 1804.0 | 1732.2 | 1669.7 | 1613.8 | 1547.6 | 1482.4 | 1429.5 |
| 20° | 2067.6 | 2013.0 | 1943.8 | 1872.2 | 1793.3 | 1708.9 | 1641.5 | 1580.8 | 1509.7 | 1438.7 | 1378.0 |
| 22.5° | 2061.3 | 2018.8 | 1941.9 | 1856.2 | 1775.3 | 1687.0 | 1610.9 | 1540.5 | 1461.7 | 1389.2 | 1318.7 |
| 25° | 2018.5 | 2003.9 | 1931.0 | 1837.5 | 1745.3 | 1642.7 | 1554.7 | 1477.6 | 1387.7 | 1310.0 | 1233.5 |
| 27.5° | 1918.5 | 1950.0 | 1904.8 | 1805.2 | 1702.6 | 1592.7 | 1493.7 | 1406.0 | 1312.7 | 1225.3 | 1149.1 |
| 30° | 1822.4 | 1894.6 | 1875.2 | 1782.9 | 1668.2 | 1560.1 | 1449.1 | 1357.4 | 1257.8 | 1168.0 | 1092.7 |
| 32.5° | 1690.8 | 1810.1 | 1829.1 | 1751.8 | 1633.2 | 1514.5 | 1398.0 | 1306.9 | 1202.9 | 1108.3 | 1034.9 |
| 35° | 1481.2 | 1659.7 | 1741.6 | 1692.5 | 1573.5 | 1445.4 | 1325.2 | 1218.9 | 1114.5 | 1021.0 | 948.2 |
| 37.5° | 1231.2 | 1474.3 | 1610.9 | 1614.4 | 1505.1 | 1372.0 | 1241.0 | 1135.6 | 1028.7 | 936.9 | 858.2 |
| 40° | 1069.1 | 1332.5 | 1510.4 | 1549.8 | 1457.5 | 1313.7 | 1181.3 | 1073.9 | 969.5 | 879.6 | 789.2 |
| 42.5° | 923.4 | 1185.8 | 1404.5 | 1473.1 | 1399.8 | 1256.9 | 1124.0 | 1011.7 | 910.2 | 825.2 | 732.8 |
| 45° | 746.7 | 976.1 | 1217.1 | 1339.7 | 1299.1 | 1166.7 | 1026.5 | 919.7 | 824.3 | 750.9 | 662.3 |
| 47.5° | 629.9 | 791.6 | 1024.8 | 1190.6 | 1189.9 | 1069.1 | 931.2 | 828.9 | 740.5 | 671.6 | 599.9 |
| 50° | 563.3 | 704.2 | 901.5 | 1089.6 | 1105.4 | 1004.1 | 872.9 | 771.6 | 689.0 | 616.8 | 559.1 |
| 52.5° | 503.6 | 619.6 | 797.1 | 977.5 | 1022.4 | 934.6 | 807.4 | 713.8 | 633.7 | 567.2 | 517.8 |
| 55° | 425.6 | 515.4 | 650.1 | 818.9 | 886.9 | 825.0 | 712.1 | 624.6 | 559.7 | 503.8 | 461.4 |
| 57.5° | 360.0 | 427.4 | 535.5 | 671.4 | 750.6 | 711.6 | 618.5 | 547.5 | 491.9 | 441.3 | 407.8 |
| 60° | 318.7 | 373.9 | 465.6 | 579.2 | 666.5 | 639.2 | 559.7 | 493.5 | 446.2 | 402.5 | 370.9 |
| 62.5° | 279.9 | 327.3 | 405.9 | 498.0 | 578.1 | 566.9 | 501.9 | 446.4 | 404.9 | 365.1 | 338.3 |
| 65° | 225.2 | 259.8 | 321.2 | 393.4 | 457.7 | 463.2 | 416.5 | 378.8 | 341.7 | 310.2 | 286.5 |
| 67.5° | 179.4 | 201.9 | 245.1 | 305.9 | 354.2 | 371.4 | 342.9 | 314.1 | 284.7 | 260.3 | 239.8 |
| 70° | 151.1 | 169.4 | 200.9 | 250.1 | 294.5 | 312.6 | 296.3 | 273.8 | 248.3 | 228.2 | 210.6 |
| 72.5° | 122.5 | 140.2 | 163.5 | 199.6 | 237.6 | 257.3 | 251.6 | 235.4 | 214.8 | 198.1 | 181.5 |
| 75° | 92.3 | 97.8 | 113.5 | 137.8 | 167.5 | 184.6 | 188.8 | 180.3 | 163.9 | 151.1 | 141.4 |
| 77.5° | 68.2 | 71.5 | 79.1 | 91.8 | 111.2 | 126.4 | 132.6 | 131.6 | 120.3 | 112.9 | 103.8 |
| 80° | 54.7 | 56.5 | 60.1 | 65.6 | 80.2 | 95.3 | 99.6 | 99.6 | 91.7 | 88.6 | 79.5 |
| 82.5° | 41.5 | 42.9 | 45.1 | 48.1 | 54.9 | 68.1 | 72.9 | 73.8 | 68.8 | 64.8 | 57.7 |
| 85° | 23.7 | 23.1 | 24.3 | 26.1 | 27.3 | 31.0 | 38.3 | 39.5 | 38.3 | 33.4 | 31.5 |
| 87.5° | 11.0 | 11.2 | 10.9 | 10.1 | 10.1 | 10.2 | 12.2 | 14.3 | 12.8 | 11.6 | 11.1 |
| 90° | 13.9 | 12.4 | 10.9 | 9.1 | 7.1 | 5.0 | 2.9 | 0.9 | 2.9 | 5.0 | 7.1 |
| 92.5° | 18.1 | 17.3 | 16.6 | 16.2 | 16.5 | 16.6 | 16.8 | 17.0 | 16.8 | 16.6 | 16.5 |
| 95° | 30.3 | 28.9 | 27.6 | 30.0 | 36.2 | 42.4 | 48.6 | 54.7 | 48.6 | 42.4 | 36.2 |
| 97.5° | 37.9 | 34.9 | 31.8 | 39.1 | 56.4 | 73.8 | 91.3 | 108.6 | 91.3 | 73.8 | 56.4 |
| 100° | 41.7 | 38.4 | 35.3 | 46.5 | 72.2 | 97.8 | 123.4 | 149.1 | 123.4 | 97.8 | 72.2 |
| 102.5° | 102.6 | 129.2 | 155.8 | 171.8 | 177.2 | 182.7 | 188.1 | 193.5 | 188.1 | 182.7 | 177.2 |
| 105° | 153.5 | 204.6 | 255.7 | 278.5 | 272.8 | 267.2 | 261.7 | 256.0 | 261.7 | 267.2 | 272.8 |
| 107.5° | 194.5 | 255.7 | 317.0 | 345.4 | 340.8 | 336.3 | 331.8 | 327.3 | 331.8 | 336.3 | 340.8 |
| 110° | 255.6 | 309.6 | 363.7 | 388.8 | 384.8 | 381.0 | 377.0 | 373.0 | 377.0 | 381.0 | 384.8 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | 100° | 105° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 112.5° | 398.5 | 411.8 | 425.2 | 430.1 | 426.6 | 423.1 | 419.7 | 416.2 | 419.7 | 423.1 | 426.6 |
| 115° | 510.2 | 505.6 | 500.9 | 496.9 | 493.8 | 490.6 | 487.4 | 484.3 | 487.4 | 490.6 | 493.8 |
| 117.5° | 569.1 | 565.9 | 562.6 | 559.3 | 555.7 | 552.2 | 548.6 | 545.0 | 548.6 | 552.2 | 555.7 |
| 120° | 610.5 | 607.2 | 603.8 | 600.7 | 597.9 | 595.1 | 592.3 | 589.5 | 592.3 | 595.1 | 597.9 |
| 122.5° | 649.7 | 646.0 | 642.4 | 639.1 | 636.1 | 633.1 | 630.2 | 627.2 | 630.2 | 633.1 | 636.1 |
| 125° | 704.5 | 700.9 | 697.4 | 694.3 | 692.0 | 689.5 | 687.1 | 684.7 | 687.1 | 689.5 | 692.0 |
| 127.5° | 755.4 | 752.8 | 750.1 | 747.5 | 744.8 | 742.1 | 739.4 | 736.7 | 739.4 | 742.1 | 744.8 |
| 130° | 788.3 | 786.2 | 784.2 | 781.6 | 778.7 | 775.7 | 772.7 | 769.7 | 772.7 | 775.7 | 778.7 |
| 132.5° | 820.0 | 817.9 | 815.9 | 813.6 | 811.0 | 808.5 | 806.0 | 803.4 | 806.0 | 808.5 | 811.0 |
| 135° | 864.8 | 863.2 | 861.5 | 859.1 | 856.2 | 853.2 | 850.2 | 847.2 | 850.2 | 853.2 | 856.2 |
| 137.5° | 905.7 | 903.8 | 901.8 | 899.8 | 897.8 | 895.6 | 893.6 | 891.4 | 893.6 | 895.6 | 897.8 |
| 140° | 932.3 | 930.3 | 928.2 | 926.5 | 925.0 | 923.4 | 921.9 | 920.4 | 921.9 | 923.4 | 925.0 |
| 142.5° | 956.6 | 954.3 | 952.0 | 950.1 | 948.7 | 947.4 | 946.0 | 944.7 | 946.0 | 947.4 | 948.7 |
| 145° | 989.8 | 986.7 | 983.5 | 982.0 | 982.2 | 982.4 | 982.5 | 982.8 | 982.5 | 982.4 | 982.2 |
| 147.5° | 1020.6 | 1017.5 | 1014.3 | 1013.1 | 1013.8 | 1014.5 | 1015.3 | 1016.0 | 1015.3 | 1014.5 | 1013.8 |
| 150° | 1039.1 | 1036.1 | 1033.1 | 1032.3 | 1033.6 | 1034.9 | 1036.2 | 1037.5 | 1036.2 | 1034.9 | 1033.6 |
| 152.5° | 1056.2 | 1053.4 | 1050.5 | 1049.9 | 1051.3 | 1052.7 | 1054.2 | 1055.7 | 1054.2 | 1052.7 | 1051.3 |
| 155° | 1080.1 | 1077.9 | 1075.7 | 1075.4 | 1077.1 | 1078.8 | 1080.5 | 1082.1 | 1080.5 | 1078.8 | 1077.1 |
| 157.5° | 1100.3 | 1098.8 | 1097.3 | 1097.2 | 1098.6 | 1100.0 | 1101.5 | 1102.9 | 1101.5 | 1100.0 | 1098.6 |
| 160° | 1112.7 | 1111.6 | 1110.5 | 1110.5 | 1111.6 | 1112.7 | 1113.9 | 1115.0 | 1113.9 | 1112.7 | 1111.6 |
| 162.5° | 1123.2 | 1122.1 | 1121.2 | 1121.3 | 1122.4 | 1123.5 | 1124.7 | 1125.8 | 1124.7 | 1123.5 | 1122.4 |
| 165° | 1136.6 | 1136.0 | 1135.4 | 1135.8 | 1136.9 | 1138.0 | 1139.1 | 1140.3 | 1139.1 | 1138.0 | 1136.9 |
| 167.5° | 1147.2 | 1146.8 | 1146.2 | 1146.5 | 1147.6 | 1148.7 | 1149.9 | 1151.0 | 1149.9 | 1148.7 | 1147.6 |
| 170° | 1152.9 | 1152.6 | 1152.2 | 1152.6 | 1153.7 | 1154.8 | 1156.0 | 1157.1 | 1156.0 | 1154.8 | 1153.7 |
| 172.5° | 1157.0 | 1156.7 | 1156.3 | 1156.7 | 1157.8 | 1158.9 | 1160.0 | 1161.1 | 1160.0 | 1158.9 | 1157.8 |
| 175° | 1161.4 | 1161.0 | 1160.6 | 1161.1 | 1162.4 | 1163.7 | 1165.1 | 1166.3 | 1165.1 | 1163.7 | 1162.4 |
| 177.5° | 1162.8 | 1162.7 | 1162.5 | 1163.0 | 1164.0 | 1165.1 | 1166.2 | 1167.2 | 1166.2 | 1165.1 | 1164.0 |
| 180° | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 110° | 115° | 120° | 125° | 130° | 135° | 140° | 145° | 150° | 155° | 160° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 |
| 2.5° | 1722.4 | 1719.0 | 1712.6 | 1702.9 | 1697.1 | 1686.9 | 1680.1 | 1683.9 | 1685.0 | 1683.9 | 1683.0 |
| 5° | 1676.1 | 1663.3 | 1645.8 | 1628.7 | 1613.0 | 1595.9 | 1586.3 | 1582.0 | 1573.5 | 1568.6 | 1566.2 |
| 7.5° | 1620.1 | 1598.1 | 1573.3 | 1543.6 | 1518.5 | 1492.2 | 1478.7 | 1472.0 | 1454.6 | 1445.2 | 1436.9 |
| 10° | 1578.3 | 1543.7 | 1518.9 | 1480.0 | 1456.3 | 1421.7 | 1398.0 | 1398.7 | 1375.0 | 1361.6 | 1351.9 |
| 12.5° | 1532.2 | 1494.2 | 1452.8 | 1417.8 | 1385.0 | 1357.2 | 1328.6 | 1317.1 | 1292.0 | 1279.1 | 1252.8 |
| 15° | 1455.7 | 1411.4 | 1367.7 | 1320.3 | 1287.0 | 1243.9 | 1202.6 | 1152.2 | 1111.5 | 1076.3 | 1066.6 |
| 17.5° | 1372.2 | 1317.3 | 1273.5 | 1217.9 | 1160.7 | 1088.2 | 1040.4 | 1011.1 | 986.6 | 968.0 | 954.2 |
| 20° | 1314.9 | 1259.0 | 1212.3 | 1128.5 | 1051.4 | 1002.3 | 967.0 | 944.6 | 919.1 | 899.0 | 888.1 |
| 22.5° | 1254.7 | 1196.4 | 1132.7 | 1039.2 | 979.1 | 939.6 | 908.2 | 882.4 | 865.1 | 849.5 | 839.6 |
| 25° | 1169.2 | 1105.4 | 1000.4 | 936.0 | 887.5 | 846.2 | 824.3 | 808.6 | 790.4 | 769.1 | 759.5 |
| 27.5° | 1078.9 | 977.5 | 902.1 | 854.2 | 807.9 | 781.0 | 761.4 | 737.8 | 721.5 | 711.9 | 701.9 |
| 30° | 1011.4 | 910.0 | 851.1 | 798.9 | 766.1 | 736.3 | 713.3 | 700.0 | 684.1 | 667.7 | 661.1 |
| 32.5° | 936.0 | 855.1 | 798.7 | 755.2 | 721.9 | 696.6 | 678.3 | 656.7 | 645.3 | 635.3 | 621.2 |
| 35° | 842.6 | 781.3 | 729.7 | 694.5 | 662.9 | 642.3 | 621.0 | 608.2 | 587.6 | 579.2 | 573.7 |
| 37.5° | 763.4 | 710.3 | 671.8 | 634.6 | 609.6 | 586.8 | 573.8 | 553.5 | 544.5 | 532.7 | 521.3 |
| 40° | 718.7 | 666.5 | 629.5 | 599.1 | 571.2 | 554.2 | 537.8 | 521.5 | 508.1 | 502.6 | 488.7 |
| 42.5° | 673.1 | 630.6 | 593.6 | 560.3 | 541.6 | 523.6 | 502.9 | 490.8 | 477.1 | 468.2 | 459.5 |
| 45° | 610.1 | 572.4 | 540.9 | 513.6 | 492.9 | 474.1 | 460.7 | 440.7 | 432.8 | 415.3 | 408.0 |
| 47.5° | 554.8 | 519.8 | 489.6 | 463.7 | 443.5 | 431.3 | 411.7 | 396.0 | 383.4 | 372.6 | 363.3 |
| 50° | 515.4 | 486.2 | 457.1 | 434.0 | 415.8 | 398.2 | 378.2 | 370.3 | 350.9 | 345.4 | 339.9 |
| 52.5° | 479.4 | 451.8 | 425.1 | 402.5 | 384.3 | 367.2 | 349.5 | 339.2 | 326.1 | 320.7 | 316.6 |
| 55° | 429.2 | 402.5 | 377.0 | 357.0 | 338.7 | 321.2 | 310.2 | 297.5 | 291.4 | 287.2 | 282.3 |
| 57.5° | 378.7 | 354.7 | 335.1 | 314.8 | 296.5 | 282.5 | 269.9 | 262.2 | 256.0 | 250.3 | 244.5 |
| 60° | 346.7 | 323.5 | 305.9 | 287.2 | 268.3 | 256.7 | 247.1 | 238.0 | 230.7 | 222.2 | 219.8 |
| 62.5° | 312.6 | 292.5 | 276.3 | 258.0 | 241.6 | 231.1 | 221.8 | 213.2 | 204.5 | 192.1 | 188.7 |
| 65° | 265.9 | 250.1 | 233.1 | 217.9 | 203.4 | 193.1 | 179.7 | 170.0 | 166.4 | 165.1 | 164.5 |
| 67.5° | 223.6 | 208.7 | 194.2 | 178.6 | 165.3 | 155.7 | 149.0 | 147.5 | 145.0 | 144.3 | 142.5 |
| 70° | 195.5 | 181.5 | 166.9 | 152.3 | 139.7 | 137.8 | 135.4 | 132.9 | 129.9 | 128.7 | 127.5 |
| 72.5° | 170.2 | 155.7 | 141.2 | 129.5 | 124.1 | 121.8 | 119.4 | 116.9 | 114.9 | 113.7 | 112.9 |
| 75° | 130.6 | 117.2 | 107.4 | 103.2 | 100.1 | 98.3 | 94.7 | 92.8 | 91.7 | 89.8 | 89.2 |
| 77.5° | 94.0 | 86.4 | 82.0 | 79.3 | 76.1 | 74.1 | 72.1 | 70.3 | 69.0 | 68.6 | 67.7 |
| 80° | 71.6 | 68.0 | 65.0 | 61.3 | 60.1 | 57.7 | 57.0 | 55.2 | 55.8 | 54.0 | 54.0 |
| 82.5° | 55.6 | 51.0 | 48.5 | 46.7 | 45.6 | 43.6 | 43.0 | 42.1 | 42.2 | 40.9 | 40.9 |
| 85° | 28.5 | 27.3 | 26.1 | 24.9 | 24.9 | 23.1 | 23.7 | 23.1 | 23.1 | 21.9 | 21.2 |
| 87.5° | 11.0 | 10.9 | 10.2 | 10.5 | 10.9 | 10.6 | 10.9 | 10.5 | 10.7 | 10.9 | 10.5 |
| 90° | 9.1 | 10.9 | 12.4 | 13.9 | 15.4 | 16.9 | 17.7 | 18.7 | 19.6 | 20.6 | 21.2 |
| 92.5° | 16.2 | 16.6 | 17.3 | 18.1 | 18.8 | 19.6 | 20.0 | 20.5 | 21.0 | 21.5 | 21.9 |
| 95° | 30.0 | 27.6 | 28.9 | 30.3 | 31.5 | 32.9 | 33.7 | 34.7 | 35.6 | 36.6 | 37.0 |
| 97.5° | 39.1 | 31.8 | 34.9 | 37.9 | 41.0 | 44.0 | 44.7 | 45.5 | 46.2 | 47.0 | 47.5 |
| 100° | 46.5 | 35.3 | 38.4 | 41.7 | 44.8 | 48.0 | 49.5 | 51.0 | 52.5 | 54.0 | 54.9 |
| 102.5° | 171.8 | 155.8 | 129.2 | 102.6 | 76.0 | 49.4 | 51.3 | 53.2 | 55.2 | 57.1 | 58.4 |
| 105° | 278.5 | 255.7 | 204.6 | 153.5 | 102.4 | 51.3 | 53.4 | 55.5 | 57.5 | 59.6 | 61.0 |
| 107.5° | 345.4 | 317.0 | 255.7 | 194.5 | 133.2 | 71.9 | 69.8 | 67.7 | 65.6 | 63.5 | 62.9 |
| 110° | 388.8 | 363.7 | 309.6 | 255.6 | 201.5 | 147.3 | 128.7 | 110.0 | 91.3 | 72.5 | 63.5 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 110° | 115° | 120° | 125° | 130° | 135° | 140° | 145° | 150° | 155° | 160° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 112.5° | 430.1 | 425.2 | 411.8 | 398.5 | 385.1 | 371.7 | 303.5 | 235.2 | 166.9 | 98.6 | 64.8 |
| 115° | 496.9 | 500.9 | 505.6 | 510.2 | 514.9 | 519.6 | 432.9 | 346.3 | 259.7 | 173.0 | 122.9 |
| 117.5° | 559.3 | 562.6 | 565.9 | 569.1 | 572.3 | 575.5 | 554.5 | 533.6 | 512.6 | 491.7 | 459.1 |
| 120° | 600.7 | 603.8 | 607.2 | 610.5 | 613.9 | 617.3 | 619.5 | 621.8 | 624.0 | 626.3 | 614.7 |
| 122.5° | 639.1 | 642.4 | 646.0 | 649.7 | 653.4 | 657.0 | 658.4 | 659.7 | 661.1 | 662.4 | 660.6 |
| 125° | 694.3 | 697.4 | 700.9 | 704.5 | 708.1 | 711.6 | 712.9 | 714.2 | 715.5 | 716.8 | 717.8 |
| 127.5° | 747.5 | 750.1 | 752.8 | 755.4 | 758.1 | 760.8 | 762.7 | 764.6 | 766.5 | 768.4 | 769.4 |
| 130° | 781.6 | 784.2 | 786.2 | 788.3 | 790.4 | 792.4 | 794.5 | 796.5 | 798.6 | 800.7 | 801.6 |
| 132.5° | 813.6 | 815.9 | 817.9 | 820.0 | 822.0 | 824.1 | 825.9 | 827.6 | 829.4 | 831.2 | 831.9 |
| 135° | 859.1 | 861.5 | 863.2 | 864.8 | 866.6 | 868.2 | 870.1 | 872.0 | 873.9 | 875.7 | 876.5 |
| 137.5° | 899.8 | 901.8 | 903.8 | 905.7 | 907.6 | 909.5 | 911.3 | 913.1 | 915.0 | 916.8 | 917.4 |
| 140° | 926.5 | 928.2 | 930.3 | 932.3 | 934.4 | 936.4 | 938.1 | 939.8 | 941.5 | 943.2 | 943.6 |
| 142.5° | 950.1 | 952.0 | 954.3 | 956.6 | 959.0 | 961.4 | 962.9 | 964.4 | 966.0 | 967.5 | 967.8 |
| 145° | 982.0 | 983.5 | 986.7 | 989.8 | 993.1 | 996.2 | 997.5 | 998.9 | 1000.1 | 1001.5 | 1001.6 |
| 147.5° | 1013.1 | 1014.3 | 1017.5 | 1020.6 | 1023.7 | 1026.9 | 1027.9 | 1028.8 | 1029.8 | 1030.8 | 1030.9 |
| 150° | 1032.3 | 1033.1 | 1036.1 | 1039.1 | 1042.1 | 1045.0 | 1046.2 | 1047.3 | 1048.5 | 1049.6 | 1049.6 |
| 152.5° | 1049.9 | 1050.5 | 1053.4 | 1056.2 | 1059.1 | 1061.9 | 1063.0 | 1064.1 | 1065.3 | 1066.4 | 1066.4 |
| 155° | 1075.4 | 1075.7 | 1077.9 | 1080.1 | 1082.4 | 1084.7 | 1085.8 | 1086.9 | 1088.1 | 1089.2 | 1088.9 |
| 157.5° | 1097.2 | 1097.3 | 1098.8 | 1100.3 | 1101.9 | 1103.5 | 1104.8 | 1106.0 | 1107.3 | 1108.6 | 1108.5 |
| 160° | 1110.5 | 1110.5 | 1111.6 | 1112.7 | 1113.9 | 1115.0 | 1116.1 | 1117.2 | 1118.3 | 1119.4 | 1119.4 |
| 162.5° | 1121.3 | 1121.2 | 1122.1 | 1123.2 | 1124.1 | 1125.1 | 1126.3 | 1127.6 | 1128.9 | 1130.2 | 1130.0 |
| 165° | 1135.8 | 1135.4 | 1136.0 | 1136.6 | 1137.2 | 1137.7 | 1139.0 | 1140.3 | 1141.6 | 1143.0 | 1143.0 |
| 167.5° | 1146.5 | 1146.2 | 1146.8 | 1147.2 | 1147.8 | 1148.3 | 1149.6 | 1151.0 | 1152.2 | 1153.6 | 1153.3 |
| 170° | 1152.6 | 1152.2 | 1152.6 | 1152.9 | 1153.3 | 1153.7 | 1155.0 | 1156.3 | 1157.6 | 1159.0 | 1158.7 |
| 172.5° | 1156.7 | 1156.3 | 1156.7 | 1157.0 | 1157.4 | 1157.8 | 1159.0 | 1160.4 | 1161.7 | 1163.0 | 1162.8 |
| 175° | 1161.1 | 1160.6 | 1161.0 | 1161.4 | 1161.7 | 1162.1 | 1163.5 | 1164.7 | 1166.1 | 1167.4 | 1167.1 |
| 177.5° | 1163.0 | 1162.5 | 1162.7 | 1162.8 | 1163.0 | 1163.2 | 1164.2 | 1165.2 | 1166.3 | 1167.4 | 1167.2 |
| 180° | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 165° | 170° | 175° | 180° | 185° | 190° | 195° | 200° | 205° | 210° | 215° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 |
| 2.5° | 1677.7 | 1678.6 | 1677.2 | 1678.2 | 1677.2 | 1678.6 | 1677.7 | 1683.0 | 1683.9 | 1685.0 | 1683.9 |
| 5° | 1563.1 | 1555.8 | 1554.7 | 1552.8 | 1554.7 | 1555.8 | 1563.1 | 1566.2 | 1568.6 | 1573.5 | 1582.0 |
| 7.5° | 1426.5 | 1425.4 | 1422.4 | 1418.1 | 1422.4 | 1425.4 | 1426.5 | 1436.9 | 1445.2 | 1454.6 | 1472.0 |
| 10° | 1338.6 | 1335.5 | 1334.9 | 1330.6 | 1334.9 | 1335.5 | 1338.6 | 1351.9 | 1361.6 | 1375.0 | 1398.7 |
| 12.5° | 1235.6 | 1216.1 | 1214.0 | 1203.4 | 1214.0 | 1216.1 | 1235.6 | 1252.8 | 1279.1 | 1292.0 | 1317.1 |
| 15° | 1052.0 | 1048.4 | 1036.3 | 1028.3 | 1036.3 | 1048.4 | 1052.0 | 1066.6 | 1076.3 | 1111.5 | 1152.2 |
| 17.5° | 947.1 | 935.3 | 931.4 | 929.8 | 931.4 | 935.3 | 947.1 | 954.2 | 968.0 | 986.6 | 1011.1 |
| 20° | 879.6 | 868.7 | 866.9 | 865.7 | 866.9 | 868.7 | 879.6 | 888.1 | 899.0 | 919.1 | 944.6 |
| 22.5° | 833.0 | 821.6 | 816.8 | 813.2 | 816.8 | 821.6 | 833.0 | 839.6 | 849.5 | 865.1 | 882.4 |
| 25° | 753.4 | 749.1 | 746.7 | 745.4 | 746.7 | 749.1 | 753.4 | 759.5 | 769.1 | 790.4 | 808.6 |
| 27.5° | 691.1 | 681.8 | 679.9 | 676.8 | 679.9 | 681.8 | 691.1 | 701.9 | 711.9 | 721.5 | 737.8 |
| 30° | 655.6 | 652.6 | 648.3 | 644.7 | 648.3 | 652.6 | 655.6 | 661.1 | 667.7 | 684.1 | 700.0 |
| 32.5° | 613.9 | 611.3 | 607.5 | 605.9 | 607.5 | 611.3 | 613.9 | 621.2 | 635.3 | 645.3 | 656.7 |
| 35° | 567.6 | 559.1 | 555.5 | 550.0 | 555.5 | 559.1 | 567.6 | 573.7 | 579.2 | 587.6 | 608.2 |
| 37.5° | 518.6 | 514.2 | 509.1 | 510.9 | 509.1 | 514.2 | 518.6 | 521.3 | 532.7 | 544.5 | 553.5 |
| 40° | 480.8 | 477.8 | 476.6 | 475.9 | 476.6 | 477.8 | 480.8 | 488.7 | 502.6 | 508.1 | 521.5 |
| 42.5° | 450.7 | 442.3 | 439.1 | 439.0 | 439.1 | 442.3 | 450.7 | 459.5 | 468.2 | 477.1 | 490.8 |
| 45° | 404.9 | 397.0 | 391.6 | 392.1 | 391.6 | 397.0 | 404.9 | 408.0 | 415.3 | 432.8 | 440.7 |
| 47.5° | 358.1 | 357.8 | 354.4 | 355.5 | 354.4 | 357.8 | 358.1 | 363.3 | 372.6 | 383.4 | 396.0 |
| 50° | 335.7 | 332.1 | 329.6 | 330.3 | 329.6 | 332.1 | 335.7 | 339.9 | 345.4 | 350.9 | 370.3 |
| 52.5° | 314.3 | 311.2 | 309.3 | 311.8 | 309.3 | 311.2 | 314.3 | 316.6 | 320.7 | 326.1 | 339.2 |
| 55° | 279.2 | 275.6 | 275.0 | 274.4 | 275.0 | 275.6 | 279.2 | 282.3 | 287.2 | 291.4 | 297.5 |
| 57.5° | 240.0 | 237.6 | 233.9 | 232.3 | 233.9 | 237.6 | 240.0 | 244.5 | 250.3 | 256.0 | 262.2 |
| 60° | 211.8 | 207.0 | 200.9 | 200.3 | 200.9 | 207.0 | 211.8 | 219.8 | 222.2 | 230.7 | 238.0 |
| 62.5° | 186.1 | 185.1 | 183.9 | 183.8 | 183.9 | 185.1 | 186.1 | 188.7 | 192.1 | 204.5 | 213.2 |
| 65° | 163.3 | 162.7 | 163.3 | 163.9 | 163.3 | 162.7 | 163.3 | 164.5 | 165.1 | 166.4 | 170.0 |
| 67.5° | 142.3 | 141.2 | 140.1 | 140.6 | 140.1 | 141.2 | 142.3 | 142.5 | 144.3 | 145.0 | 147.5 |
| 70° | 126.3 | 125.6 | 125.1 | 125.1 | 125.1 | 125.6 | 126.3 | 127.5 | 128.7 | 129.9 | 132.9 |
| 72.5° | 110.7 | 110.6 | 110.0 | 109.5 | 110.0 | 110.6 | 110.7 | 112.9 | 113.7 | 114.9 | 116.9 |
| 75° | 88.6 | 87.4 | 87.4 | 87.4 | 87.4 | 87.4 | 88.6 | 89.2 | 89.8 | 91.7 | 92.8 |
| 77.5° | 67.5 | 66.9 | 66.3 | 65.8 | 66.3 | 66.9 | 67.5 | 67.7 | 68.6 | 69.0 | 70.3 |
| 80° | 53.4 | 52.8 | 52.2 | 52.2 | 52.2 | 52.8 | 53.4 | 54.0 | 54.0 | 55.8 | 55.2 |
| 82.5° | 40.8 | 40.2 | 40.1 | 39.6 | 40.1 | 40.2 | 40.8 | 40.9 | 40.9 | 42.2 | 42.1 |
| 85° | 21.9 | 22.5 | 21.9 | 23.1 | 21.9 | 22.5 | 21.9 | 21.2 | 21.9 | 23.1 | 23.1 |
| 87.5° | 10.6 | 10.2 | 10.8 | 10.4 | 10.8 | 10.2 | 10.6 | 10.5 | 10.9 | 10.7 | 10.5 |
| 90° | 21.6 | 22.0 | 22.3 | 22.7 | 22.3 | 22.0 | 21.6 | 21.2 | 20.6 | 19.6 | 18.7 |
| 92.5° | 22.1 | 22.3 | 22.5 | 22.7 | 22.5 | 22.3 | 22.1 | 21.9 | 21.5 | 21.0 | 20.5 |
| 95° | 36.8 | 36.6 | 36.4 | 36.2 | 36.4 | 36.6 | 36.8 | 37.0 | 36.6 | 35.6 | 34.7 |
| 97.5° | 47.7 | 47.9 | 48.1 | 48.3 | 48.1 | 47.9 | 47.7 | 47.5 | 47.0 | 46.2 | 45.5 |
| 100° | 55.3 | 55.7 | 56.1 | 56.4 | 56.1 | 55.7 | 55.3 | 54.9 | 54.0 | 52.5 | 51.0 |
| 102.5° | 58.9 | 59.4 | 60.0 | 60.4 | 60.0 | 59.4 | 58.9 | 58.4 | 57.1 | 55.2 | 53.2 |
| 105° | 61.8 | 62.5 | 63.2 | 64.0 | 63.2 | 62.5 | 61.8 | 61.0 | 59.6 | 57.5 | 55.5 |
| 107.5° | 63.6 | 64.3 | 65.1 | 65.8 | 65.1 | 64.3 | 63.6 | 62.9 | 63.5 | 65.6 | 67.7 |
| 110° | 64.2 | 65.0 | 65.8 | 66.5 | 65.8 | 65.0 | 64.2 | 63.5 | 72.5 | 91.3 | 110.0 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 165° | 170° | 175° | 180° | 185° | 190° | 195° | 200° | 205° | 210° | 215° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 112.5° | 65.4 | 66.0 | 66.6 | 67.2 | 66.6 | 66.0 | 65.4 | 64.8 | 98.6 | 166.9 | 235.2 |
| 115° | 109.5 | 96.0 | 82.5 | 69.1 | 82.5 | 96.0 | 109.5 | 122.9 | 173.0 | 259.7 | 346.3 |
| 117.5° | 414.8 | 370.5 | 326.2 | 281.9 | 326.2 | 370.5 | 414.8 | 459.1 | 491.7 | 512.6 | 533.6 |
| 120° | 589.5 | 564.2 | 538.9 | 513.7 | 538.9 | 564.2 | 589.5 | 614.7 | 626.3 | 624.0 | 621.8 |
| 122.5° | 655.8 | 650.9 | 645.9 | 641.0 | 645.9 | 650.9 | 655.8 | 660.6 | 662.4 | 661.1 | 659.7 |
| 125° | 718.4 | 718.9 | 719.5 | 720.0 | 719.5 | 718.9 | 718.4 | 717.8 | 716.8 | 715.5 | 714.2 |
| 127.5° | 769.5 | 769.7 | 769.8 | 769.8 | 769.8 | 769.7 | 769.5 | 769.4 | 768.4 | 766.5 | 764.6 |
| 130° | 801.5 | 801.2 | 801.1 | 800.9 | 801.1 | 801.2 | 801.5 | 801.6 | 800.7 | 798.6 | 796.5 |
| 132.5° | 831.7 | 831.6 | 831.4 | 831.2 | 831.4 | 831.6 | 831.7 | 831.9 | 831.2 | 829.4 | 827.6 |
| 135° | 876.1 | 875.7 | 875.4 | 875.0 | 875.4 | 875.7 | 876.1 | 876.5 | 875.7 | 873.9 | 872.0 |
| 137.5° | 916.8 | 916.2 | 915.5 | 914.9 | 915.5 | 916.2 | 916.8 | 917.4 | 916.8 | 915.0 | 913.1 |
| 140° | 942.6 | 941.7 | 940.7 | 939.8 | 940.7 | 941.7 | 942.6 | 943.6 | 943.2 | 941.5 | 939.8 |
| 142.5° | 966.9 | 965.9 | 965.0 | 964.1 | 965.0 | 965.9 | 966.9 | 967.8 | 967.5 | 966.0 | 964.4 |
| 145° | 1000.8 | 999.8 | 998.9 | 997.9 | 998.9 | 999.8 | 1000.8 | 1001.6 | 1001.5 | 1000.1 | 998.9 |
| 147.5° | 1030.1 | 1029.3 | 1028.5 | 1027.7 | 1028.5 | 1029.3 | 1030.1 | 1030.9 | 1030.8 | 1029.8 | 1028.8 |
| 150° | 1048.7 | 1047.8 | 1046.9 | 1045.9 | 1046.9 | 1047.8 | 1048.7 | 1049.6 | 1049.6 | 1048.5 | 1047.3 |
| 152.5° | 1065.1 | 1063.9 | 1062.6 | 1061.4 | 1062.6 | 1063.9 | 1065.1 | 1066.4 | 1066.4 | 1065.3 | 1064.1 |
| 155° | 1087.4 | 1086.0 | 1084.5 | 1083.0 | 1084.5 | 1086.0 | 1087.4 | 1088.9 | 1089.2 | 1088.1 | 1086.9 |
| 157.5° | 1107.1 | 1105.6 | 1104.1 | 1102.6 | 1104.1 | 1105.6 | 1107.1 | 1108.5 | 1108.6 | 1107.3 | 1106.0 |
| 160° | 1118.1 | 1116.7 | 1115.5 | 1114.1 | 1115.5 | 1116.7 | 1118.1 | 1119.4 | 1119.4 | 1118.3 | 1117.2 |
| 162.5° | 1128.4 | 1126.8 | 1125.1 | 1123.6 | 1125.1 | 1126.8 | 1128.4 | 1130.0 | 1130.2 | 1128.9 | 1127.6 |
| 165° | 1141.6 | 1140.3 | 1139.0 | 1137.7 | 1139.0 | 1140.3 | 1141.6 | 1143.0 | 1143.0 | 1141.6 | 1140.3 |
| 167.5° | 1151.7 | 1150.0 | 1148.3 | 1146.6 | 1148.3 | 1150.0 | 1151.7 | 1153.3 | 1153.6 | 1152.2 | 1151.0 |
| 170° | 1157.1 | 1155.4 | 1153.7 | 1152.0 | 1153.7 | 1155.4 | 1157.1 | 1158.7 | 1159.0 | 1157.6 | 1156.3 |
| 172.5° | 1161.1 | 1159.4 | 1157.8 | 1156.0 | 1157.8 | 1159.4 | 1161.1 | 1162.8 | 1163.0 | 1161.7 | 1160.4 |
| 175° | 1165.2 | 1163.3 | 1161.5 | 1159.6 | 1161.5 | 1163.3 | 1165.2 | 1167.1 | 1167.4 | 1166.1 | 1164.7 |
| 177.5° | 1165.9 | 1164.5 | 1163.2 | 1161.8 | 1163.2 | 1164.5 | 1165.9 | 1167.2 | 1167.4 | 1166.3 | 1165.2 |
| 180° | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 220° | 225° | 230° | 235° | 240° | 245° | 250° | 255° | 260° | 265° | 270° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 |
| 2.5° | 1680.1 | 1686.9 | 1697.1 | 1702.9 | 1712.6 | 1719.0 | 1722.4 | 1728.6 | 1732.0 | 1744.2 | 1756.8 |
| 5° | 1586.3 | 1595.9 | 1613.0 | 1628.7 | 1645.8 | 1663.3 | 1676.1 | 1690.7 | 1704.0 | 1727.0 | 1751.4 |
| 7.5° | 1478.7 | 1492.2 | 1518.5 | 1543.6 | 1573.3 | 1598.1 | 1620.1 | 1645.0 | 1667.2 | 1700.3 | 1734.7 |
| 10° | 1398.0 | 1421.7 | 1456.3 | 1480.0 | 1518.9 | 1543.7 | 1578.3 | 1605.7 | 1636.6 | 1680.3 | 1719.2 |
| 12.5° | 1328.6 | 1357.2 | 1385.0 | 1417.8 | 1452.8 | 1494.2 | 1532.2 | 1567.3 | 1604.1 | 1649.2 | 1694.9 |
| 15° | 1202.6 | 1243.9 | 1287.0 | 1320.3 | 1367.7 | 1411.4 | 1455.7 | 1503.1 | 1548.0 | 1602.0 | 1661.5 |
| 17.5° | 1040.4 | 1088.2 | 1160.7 | 1217.9 | 1273.5 | 1317.3 | 1372.2 | 1429.5 | 1482.4 | 1547.6 | 1613.8 |
| 20° | 967.0 | 1002.3 | 1051.4 | 1128.5 | 1212.3 | 1259.0 | 1314.9 | 1378.0 | 1438.7 | 1509.7 | 1580.8 |
| 22.5° | 908.2 | 939.6 | 979.1 | 1039.2 | 1132.7 | 1196.4 | 1254.7 | 1318.7 | 1389.2 | 1461.7 | 1540.5 |
| 25° | 824.3 | 846.2 | 887.5 | 936.0 | 1000.4 | 1105.4 | 1169.2 | 1233.5 | 1310.0 | 1387.7 | 1477.6 |
| 27.5° | 761.4 | 781.0 | 807.9 | 854.2 | 902.1 | 977.5 | 1078.9 | 1149.1 | 1225.3 | 1312.7 | 1406.0 |
| 30° | 713.3 | 736.3 | 766.1 | 798.9 | 851.1 | 910.0 | 1011.4 | 1092.7 | 1168.0 | 1257.8 | 1357.4 |
| 32.5° | 678.3 | 696.6 | 721.9 | 755.2 | 798.7 | 855.1 | 936.0 | 1034.9 | 1108.3 | 1202.9 | 1306.9 |
| 35° | 621.0 | 642.3 | 662.9 | 694.5 | 729.7 | 781.3 | 842.6 | 948.2 | 1021.0 | 1114.5 | 1218.9 |
| 37.5° | 573.8 | 586.8 | 609.6 | 634.6 | 671.8 | 710.3 | 763.4 | 858.2 | 936.9 | 1028.7 | 1135.6 |
| 40° | 537.8 | 554.2 | 571.2 | 599.1 | 629.5 | 666.5 | 718.7 | 789.2 | 879.6 | 969.5 | 1073.9 |
| 42.5° | 502.9 | 523.6 | 541.6 | 560.3 | 593.6 | 630.6 | 673.1 | 732.8 | 825.2 | 910.2 | 1011.7 |
| 45° | 460.7 | 474.1 | 492.9 | 513.6 | 540.9 | 572.4 | 610.1 | 662.3 | 750.9 | 824.3 | 919.7 |
| 47.5° | 411.7 | 431.3 | 443.5 | 463.7 | 489.6 | 519.8 | 554.8 | 599.9 | 671.6 | 740.5 | 828.9 |
| 50° | 378.2 | 398.2 | 415.8 | 434.0 | 457.1 | 486.2 | 515.4 | 559.1 | 616.8 | 689.0 | 771.6 |
| 52.5° | 349.5 | 367.2 | 384.3 | 402.5 | 425.1 | 451.8 | 479.4 | 517.8 | 567.2 | 633.7 | 713.8 |
| 55° | 310.2 | 321.2 | 338.7 | 357.0 | 377.0 | 402.5 | 429.2 | 461.4 | 503.8 | 559.7 | 624.6 |
| 57.5° | 269.9 | 282.5 | 296.5 | 314.8 | 335.1 | 354.7 | 378.7 | 407.8 | 441.3 | 491.9 | 547.5 |
| 60° | 247.1 | 256.7 | 268.3 | 287.2 | 305.9 | 323.5 | 346.7 | 370.9 | 402.5 | 446.2 | 493.5 |
| 62.5° | 221.8 | 231.1 | 241.6 | 258.0 | 276.3 | 292.5 | 312.6 | 338.3 | 365.1 | 404.9 | 446.4 |
| 65° | 179.7 | 193.1 | 203.4 | 217.9 | 233.1 | 250.1 | 265.9 | 286.5 | 310.2 | 341.7 | 378.8 |
| 67.5° | 149.0 | 155.7 | 165.3 | 178.6 | 194.2 | 208.7 | 223.6 | 239.8 | 260.3 | 284.7 | 314.1 |
| 70° | 135.4 | 137.8 | 139.7 | 152.3 | 166.9 | 181.5 | 195.5 | 210.6 | 228.2 | 248.3 | 273.8 |
| 72.5° | 119.4 | 121.8 | 124.1 | 129.5 | 141.2 | 155.7 | 170.2 | 181.5 | 198.1 | 214.8 | 235.4 |
| 75° | 94.7 | 98.3 | 100.1 | 103.2 | 107.4 | 117.2 | 130.6 | 141.4 | 151.1 | 163.9 | 180.3 |
| 77.5° | 72.1 | 74.1 | 76.1 | 79.3 | 82.0 | 86.4 | 94.0 | 103.8 | 112.9 | 120.3 | 131.6 |
| 80° | 57.0 | 57.7 | 60.1 | 61.3 | 65.0 | 68.0 | 71.6 | 79.5 | 88.6 | 91.7 | 99.6 |
| 82.5° | 43.0 | 43.6 | 45.6 | 46.7 | 48.5 | 51.0 | 55.6 | 57.7 | 64.8 | 68.8 | 73.8 |
| 85° | 23.7 | 23.1 | 24.9 | 24.9 | 26.1 | 27.3 | 28.5 | 31.5 | 33.4 | 38.3 | 39.5 |
| 87.5° | 10.9 | 10.6 | 10.9 | 10.5 | 10.2 | 10.9 | 11.0 | 11.1 | 11.6 | 12.8 | 14.3 |
| 90° | 17.7 | 16.9 | 15.4 | 13.9 | 12.4 | 10.9 | 9.1 | 7.1 | 5.0 | 2.9 | 0.9 |
| 92.5° | 20.0 | 19.6 | 18.8 | 18.1 | 17.3 | 16.6 | 16.2 | 16.5 | 16.6 | 16.8 | 17.0 |
| 95° | 33.7 | 32.9 | 31.5 | 30.3 | 28.9 | 27.6 | 30.0 | 36.2 | 42.4 | 48.6 | 54.7 |
| 97.5° | 44.7 | 44.0 | 41.0 | 37.9 | 34.9 | 31.8 | 39.1 | 56.4 | 73.8 | 91.3 | 108.6 |
| 100° | 49.5 | 48.0 | 44.8 | 41.7 | 38.4 | 35.3 | 46.5 | 72.2 | 97.8 | 123.4 | 149.1 |
| 102.5° | 51.3 | 49.4 | 76.0 | 102.6 | 129.2 | 155.8 | 171.8 | 177.2 | 182.7 | 188.1 | 193.5 |
| 105° | 53.4 | 51.3 | 102.4 | 153.5 | 204.6 | 255.7 | 278.5 | 272.8 | 267.2 | 261.7 | 256.0 |
| 107.5° | 69.8 | 71.9 | 133.2 | 194.5 | 255.7 | 317.0 | 345.4 | 340.8 | 336.3 | 331.8 | 327.3 |
| 110° | 128.7 | 147.3 | 201.5 | 255.6 | 309.6 | 363.7 | 388.8 | 384.8 | 381.0 | 377.0 | 373.0 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 220° | 225° | 230° | 235° | 240° | 245° | 250° | 255° | 260° | 265° | 270° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 112.5° | 303.5 | 371.7 | 385.1 | 398.5 | 411.8 | 425.2 | 430.1 | 426.6 | 423.1 | 419.7 | 416.2 |
| 115° | 432.9 | 519.6 | 514.9 | 510.2 | 505.6 | 500.9 | 496.9 | 493.8 | 490.6 | 487.4 | 484.3 |
| 117.5° | 554.5 | 575.5 | 572.3 | 569.1 | 565.9 | 562.6 | 559.3 | 555.7 | 552.2 | 548.6 | 545.0 |
| 120° | 619.5 | 617.3 | 613.9 | 610.5 | 607.2 | 603.8 | 600.7 | 597.9 | 595.1 | 592.3 | 589.5 |
| 122.5° | 658.4 | 657.0 | 653.4 | 649.7 | 646.0 | 642.4 | 639.1 | 636.1 | 633.1 | 630.2 | 627.2 |
| 125° | 712.9 | 711.6 | 708.1 | 704.5 | 700.9 | 697.4 | 694.3 | 692.0 | 689.5 | 687.1 | 684.7 |
| 127.5° | 762.7 | 760.8 | 758.1 | 755.4 | 752.8 | 750.1 | 747.5 | 744.8 | 742.1 | 739.4 | 736.7 |
| 130° | 794.5 | 792.4 | 790.4 | 788.3 | 786.2 | 784.2 | 781.6 | 778.7 | 775.7 | 772.7 | 769.7 |
| 132.5° | 825.9 | 824.1 | 822.0 | 820.0 | 817.9 | 815.9 | 813.6 | 811.0 | 808.5 | 806.0 | 803.4 |
| 135° | 870.1 | 868.2 | 866.6 | 864.8 | 863.2 | 861.5 | 859.1 | 856.2 | 853.2 | 850.2 | 847.2 |
| 137.5° | 911.3 | 909.5 | 907.6 | 905.7 | 903.8 | 901.8 | 899.8 | 897.8 | 895.6 | 893.6 | 891.4 |
| 140° | 938.1 | 936.4 | 934.4 | 932.3 | 930.3 | 928.2 | 926.5 | 925.0 | 923.4 | 921.9 | 920.4 |
| 142.5° | 962.9 | 961.4 | 959.0 | 956.6 | 954.3 | 952.0 | 950.1 | 948.7 | 947.4 | 946.0 | 944.7 |
| 145° | 997.5 | 996.2 | 993.1 | 989.8 | 986.7 | 983.5 | 982.0 | 982.2 | 982.4 | 982.5 | 982.8 |
| 147.5° | 1027.9 | 1026.9 | 1023.7 | 1020.6 | 1017.5 | 1014.3 | 1013.1 | 1013.8 | 1014.5 | 1015.3 | 1016.0 |
| 150° | 1046.2 | 1045.0 | 1042.1 | 1039.1 | 1036.1 | 1033.1 | 1032.3 | 1033.6 | 1034.9 | 1036.2 | 1037.5 |
| 152.5° | 1063.0 | 1061.9 | 1059.1 | 1056.2 | 1053.4 | 1050.5 | 1049.9 | 1051.3 | 1052.7 | 1054.2 | 1055.7 |
| 155° | 1085.8 | 1084.7 | 1082.4 | 1080.1 | 1077.9 | 1075.7 | 1075.4 | 1077.1 | 1078.8 | 1080.5 | 1082.1 |
| 157.5° | 1104.8 | 1103.5 | 1101.9 | 1100.3 | 1098.8 | 1097.3 | 1097.2 | 1098.6 | 1100.0 | 1101.5 | 1102.9 |
| 160° | 1116.1 | 1115.0 | 1113.9 | 1112.7 | 1111.6 | 1110.5 | 1110.5 | 1111.6 | 1112.7 | 1113.9 | 1115.0 |
| 162.5° | 1126.3 | 1125.1 | 1124.1 | 1123.2 | 1122.1 | 1121.2 | 1121.3 | 1122.4 | 1123.5 | 1124.7 | 1125.8 |
| 165° | 1139.0 | 1137.7 | 1137.2 | 1136.6 | 1136.0 | 1135.4 | 1135.8 | 1136.9 | 1138.0 | 1139.1 | 1140.3 |
| 167.5° | 1149.6 | 1148.3 | 1147.8 | 1147.2 | 1146.8 | 1146.2 | 1146.5 | 1147.6 | 1148.7 | 1149.9 | 1151.0 |
| 170° | 1155.0 | 1153.7 | 1153.3 | 1152.9 | 1152.6 | 1152.2 | 1152.6 | 1153.7 | 1154.8 | 1156.0 | 1157.1 |
| 172.5° | 1159.0 | 1157.8 | 1157.4 | 1157.0 | 1156.7 | 1156.3 | 1156.7 | 1157.8 | 1158.9 | 1160.0 | 1161.1 |
| 175° | 1163.5 | 1162.1 | 1161.7 | 1161.4 | 1161.0 | 1160.6 | 1161.1 | 1162.4 | 1163.7 | 1165.1 | 1166.3 |
| 177.5° | 1164.2 | 1163.2 | 1163.0 | 1162.8 | 1162.7 | 1162.5 | 1163.0 | 1164.0 | 1165.1 | 1166.2 | 1167.2 |
| 180° | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 275° | 280° | 285° | 290° | 295° | 300° | 305° | 310° | 315° | 320° | 325° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 |
| 2.5° | 1757.3 | 1758.7 | 1768.5 | 1772.8 | 1781.6 | 1784.9 | 1788.9 | 1787.9 | 1787.9 | 1789.9 | 1803.4 |
| 5° | 1761.1 | 1773.2 | 1791.4 | 1809.0 | 1826.1 | 1840.6 | 1850.3 | 1860.0 | 1863.7 | 1881.3 | 1897.0 |
| 7.5° | 1754.8 | 1777.1 | 1807.2 | 1834.1 | 1866.2 | 1891.3 | 1912.2 | 1931.0 | 1943.9 | 1969.5 | 1995.7 |
| 10° | 1746.5 | 1778.1 | 1812.0 | 1846.7 | 1890.9 | 1924.4 | 1958.4 | 1984.5 | 1993.0 | 2031.2 | 2053.1 |
| 12.5° | 1730.0 | 1772.3 | 1815.4 | 1860.3 | 1903.6 | 1949.6 | 1987.0 | 2013.1 | 2043.0 | 2077.3 | 2117.7 |
| 15° | 1705.3 | 1753.8 | 1810.2 | 1867.9 | 1929.8 | 1985.7 | 2025.8 | 2071.2 | 2104.0 | 2141.7 | 2176.9 |
| 17.5° | 1669.7 | 1732.2 | 1804.0 | 1870.7 | 1942.4 | 2002.3 | 2057.5 | 2101.1 | 2124.2 | 2145.7 | 2150.9 |
| 20° | 1641.5 | 1708.9 | 1793.3 | 1872.2 | 1943.8 | 2013.0 | 2067.6 | 2104.0 | 2110.1 | 2110.7 | 2078.5 |
| 22.5° | 1610.9 | 1687.0 | 1775.3 | 1856.2 | 1941.9 | 2018.8 | 2061.3 | 2076.9 | 2052.8 | 2011.7 | 1949.4 |
| 25° | 1554.7 | 1642.7 | 1745.3 | 1837.5 | 1931.0 | 2003.9 | 2018.5 | 1991.2 | 1906.8 | 1818.1 | 1705.8 |
| 27.5° | 1493.7 | 1592.7 | 1702.6 | 1805.2 | 1904.8 | 1950.0 | 1918.5 | 1820.0 | 1668.1 | 1536.0 | 1375.9 |
| 30° | 1449.1 | 1560.1 | 1668.2 | 1782.9 | 1875.2 | 1894.6 | 1822.4 | 1677.3 | 1500.0 | 1300.9 | 1141.3 |
| 32.5° | 1398.0 | 1514.5 | 1633.2 | 1751.8 | 1829.1 | 1810.1 | 1690.8 | 1512.2 | 1304.3 | 1108.6 | 957.7 |
| 35° | 1325.2 | 1445.4 | 1573.5 | 1692.5 | 1741.6 | 1659.7 | 1481.2 | 1248.7 | 1036.3 | 853.5 | 749.7 |
| 37.5° | 1241.0 | 1372.0 | 1505.1 | 1614.4 | 1610.9 | 1474.3 | 1231.2 | 991.2 | 812.6 | 704.6 | 630.6 |
| 40° | 1181.3 | 1313.7 | 1457.5 | 1549.8 | 1510.4 | 1332.5 | 1069.1 | 842.6 | 712.1 | 625.9 | 571.9 |
| 42.5° | 1124.0 | 1256.9 | 1399.8 | 1473.1 | 1404.5 | 1185.8 | 923.4 | 745.9 | 638.3 | 571.0 | 527.2 |
| 45° | 1026.5 | 1166.7 | 1299.1 | 1339.7 | 1217.1 | 976.1 | 746.7 | 618.0 | 546.4 | 496.5 | 466.2 |
| 47.5° | 931.2 | 1069.1 | 1189.9 | 1190.6 | 1024.8 | 791.6 | 629.9 | 534.8 | 473.6 | 435.1 | 413.0 |
| 50° | 872.9 | 1004.1 | 1105.4 | 1089.6 | 901.5 | 704.2 | 563.3 | 481.4 | 430.4 | 400.7 | 377.6 |
| 52.5° | 807.4 | 934.6 | 1022.4 | 977.5 | 797.1 | 619.6 | 503.6 | 434.7 | 392.5 | 366.6 | 346.0 |
| 55° | 712.1 | 825.0 | 886.9 | 818.9 | 650.1 | 515.4 | 425.6 | 371.5 | 339.9 | 318.1 | 300.5 |
| 57.5° | 618.5 | 711.6 | 750.6 | 671.4 | 535.5 | 427.4 | 360.0 | 319.4 | 288.1 | 272.4 | 263.3 |
| 60° | 559.7 | 639.2 | 666.5 | 579.2 | 465.6 | 373.9 | 318.7 | 281.1 | 258.0 | 247.7 | 238.6 |
| 62.5° | 501.9 | 566.9 | 578.1 | 498.0 | 405.9 | 327.3 | 279.9 | 248.0 | 232.7 | 222.9 | 214.3 |
| 65° | 416.5 | 463.2 | 457.7 | 393.4 | 321.2 | 259.8 | 225.2 | 205.8 | 194.2 | 180.3 | 165.1 |
| 67.5° | 342.9 | 371.4 | 354.2 | 305.9 | 245.1 | 201.9 | 179.4 | 164.6 | 150.3 | 137.0 | 133.6 |
| 70° | 296.3 | 312.6 | 294.5 | 250.1 | 200.9 | 169.4 | 151.1 | 133.6 | 125.1 | 122.0 | 116.5 |
| 72.5° | 251.6 | 257.3 | 237.6 | 199.6 | 163.5 | 140.2 | 122.5 | 112.6 | 108.1 | 105.5 | 102.0 |
| 75° | 188.8 | 184.6 | 167.5 | 137.8 | 113.5 | 97.8 | 92.3 | 88.6 | 85.6 | 83.2 | 81.4 |
| 77.5° | 132.6 | 126.4 | 111.2 | 91.8 | 79.1 | 71.5 | 68.2 | 66.3 | 64.8 | 63.6 | 61.8 |
| 80° | 99.6 | 95.3 | 80.2 | 65.6 | 60.1 | 56.5 | 54.7 | 52.2 | 52.2 | 51.0 | 49.2 |
| 82.5° | 72.9 | 68.1 | 54.9 | 48.1 | 45.1 | 42.9 | 41.5 | 40.1 | 39.6 | 39.8 | 38.5 |
| 85° | 38.3 | 31.0 | 27.3 | 26.1 | 24.3 | 23.1 | 23.7 | 22.5 | 22.5 | 22.5 | 21.9 |
| 87.5° | 12.2 | 10.2 | 10.1 | 10.1 | 10.9 | 11.2 | 11.0 | 11.3 | 12.1 | 11.8 | 12.5 |
| 90° | 2.9 | 5.0 | 7.1 | 9.1 | 10.9 | 12.4 | 13.9 | 15.4 | 16.9 | 17.7 | 18.7 |
| 92.5° | 16.8 | 16.6 | 16.5 | 16.2 | 16.6 | 17.3 | 18.1 | 18.8 | 19.6 | 20.0 | 20.5 |
| 95° | 48.6 | 42.4 | 36.2 | 30.0 | 27.6 | 28.9 | 30.3 | 31.5 | 32.9 | 33.7 | 34.7 |
| 97.5° | 91.3 | 73.8 | 56.4 | 39.1 | 31.8 | 34.9 | 37.9 | 41.0 | 44.0 | 44.7 | 45.5 |
| 100° | 123.4 | 97.8 | 72.2 | 46.5 | 35.3 | 38.4 | 41.7 | 44.8 | 48.0 | 49.5 | 51.0 |
| 102.5° | 188.1 | 182.7 | 177.2 | 171.8 | 155.8 | 129.2 | 102.6 | 76.0 | 49.4 | 51.3 | 53.2 |
| 105° | 261.7 | 267.2 | 272.8 | 278.5 | 255.7 | 204.6 | 153.5 | 102.4 | 51.3 | 53.4 | 55.5 |
| 107.5° | 331.8 | 336.3 | 340.8 | 345.4 | 317.0 | 255.7 | 194.5 | 133.2 | 71.9 | 69.8 | 67.7 |
| 110° | 377.0 | 381.0 | 384.8 | 388.8 | 363.7 | 309.6 | 255.6 | 201.5 | 147.3 | 128.7 | 110.0 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 275° | 280° | 285° | 290° | 295° | 300° | 305° | 310° | 315° | 320° | 325° |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 112.5° | 419.7 | 423.1 | 426.6 | 430.1 | 425.2 | 411.8 | 398.5 | 385.1 | 371.7 | 303.5 | 235.2 |
| 115° | 487.4 | 490.6 | 493.8 | 496.9 | 500.9 | 505.6 | 510.2 | 514.9 | 519.6 | 432.9 | 346.3 |
| 117.5° | 548.6 | 552.2 | 555.7 | 559.3 | 562.6 | 565.9 | 569.1 | 572.3 | 575.5 | 554.5 | 533.6 |
| 120° | 592.3 | 595.1 | 597.9 | 600.7 | 603.8 | 607.2 | 610.5 | 613.9 | 617.3 | 619.5 | 621.8 |
| 122.5° | 630.2 | 633.1 | 636.1 | 639.1 | 642.4 | 646.0 | 649.7 | 653.4 | 657.0 | 658.4 | 659.7 |
| 125° | 687.1 | 689.5 | 692.0 | 694.3 | 697.4 | 700.9 | 704.5 | 708.1 | 711.6 | 712.9 | 714.2 |
| 127.5° | 739.4 | 742.1 | 744.8 | 747.5 | 750.1 | 752.8 | 755.4 | 758.1 | 760.8 | 762.7 | 764.6 |
| 130° | 772.7 | 775.7 | 778.7 | 781.6 | 784.2 | 786.2 | 788.3 | 790.4 | 792.4 | 794.5 | 796.5 |
| 132.5° | 806.0 | 808.5 | 811.0 | 813.6 | 815.9 | 817.9 | 820.0 | 822.0 | 824.1 | 825.9 | 827.6 |
| 135° | 850.2 | 853.2 | 856.2 | 859.1 | 861.5 | 863.2 | 864.8 | 866.6 | 868.2 | 870.1 | 872.0 |
| 137.5° | 893.6 | 895.6 | 897.8 | 899.8 | 901.8 | 903.8 | 905.7 | 907.6 | 909.5 | 911.3 | 913.1 |
| 140° | 921.9 | 923.4 | 925.0 | 926.5 | 928.2 | 930.3 | 932.3 | 934.4 | 936.4 | 938.1 | 939.8 |
| 142.5° | 946.0 | 947.4 | 948.7 | 950.1 | 952.0 | 954.3 | 956.6 | 959.0 | 961.4 | 962.9 | 964.4 |
| 145° | 982.5 | 982.4 | 982.2 | 982.0 | 983.5 | 986.7 | 989.8 | 993.1 | 996.2 | 997.5 | 998.9 |
| 147.5° | 1015.3 | 1014.5 | 1013.8 | 1013.1 | 1014.3 | 1017.5 | 1020.6 | 1023.7 | 1026.9 | 1027.9 | 1028.8 |
| 150° | 1036.2 | 1034.9 | 1033.6 | 1032.3 | 1033.1 | 1036.1 | 1039.1 | 1042.1 | 1045.0 | 1046.2 | 1047.3 |
| 152.5° | 1054.2 | 1052.7 | 1051.3 | 1049.9 | 1050.5 | 1053.4 | 1056.2 | 1059.1 | 1061.9 | 1063.0 | 1064.1 |
| 155° | 1080.5 | 1078.8 | 1077.1 | 1075.4 | 1075.7 | 1077.9 | 1080.1 | 1082.4 | 1084.7 | 1085.8 | 1086.9 |
| 157.5° | 1101.5 | 1100.0 | 1098.6 | 1097.2 | 1097.3 | 1098.8 | 1100.3 | 1101.9 | 1103.5 | 1104.8 | 1106.0 |
| 160° | 1113.9 | 1112.7 | 1111.6 | 1110.5 | 1110.5 | 1111.6 | 1112.7 | 1113.9 | 1115.0 | 1116.1 | 1117.2 |
| 162.5° | 1124.7 | 1123.5 | 1122.4 | 1121.3 | 1121.2 | 1122.1 | 1123.2 | 1124.1 | 1125.1 | 1126.3 | 1127.6 |
| 165° | 1139.1 | 1138.0 | 1136.9 | 1135.8 | 1135.4 | 1136.0 | 1136.6 | 1137.2 | 1137.7 | 1139.0 | 1140.3 |
| 167.5° | 1149.9 | 1148.7 | 1147.6 | 1146.5 | 1146.2 | 1146.8 | 1147.2 | 1147.8 | 1148.3 | 1149.6 | 1151.0 |
| 170° | 1156.0 | 1154.8 | 1153.7 | 1152.6 | 1152.2 | 1152.6 | 1152.9 | 1153.3 | 1153.7 | 1155.0 | 1156.3 |
| 172.5° | 1160.0 | 1158.9 | 1157.8 | 1156.7 | 1156.3 | 1156.7 | 1157.0 | 1157.4 | 1157.8 | 1159.0 | 1160.4 |
| 175° | 1165.1 | 1163.7 | 1162.4 | 1161.1 | 1160.6 | 1161.0 | 1161.4 | 1161.7 | 1162.1 | 1163.5 | 1164.7 |
| 177.5° | 1166.2 | 1165.1 | 1164.0 | 1163.0 | 1162.5 | 1162.7 | 1162.8 | 1163.0 | 1163.2 | 1164.2 | 1165.2 |
| 180° | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 330° | 335° | 340° | 345° | 350° | 355° | 360° |
|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 | 1747.1 |
| 2.5° | 1808.3 | 1814.6 | 1817.5 | 1817.5 | 1820.9 | 1819.5 | 1818.0 |
| 5° | 1912.2 | 1923.7 | 1926.2 | 1937.1 | 1945.0 | 1942.6 | 1943.8 |
| 7.5° | 2015.5 | 2034.1 | 2052.5 | 2060.9 | 2062.1 | 2067.0 | 2068.9 |
| 10° | 2079.2 | 2094.4 | 2122.9 | 2118.6 | 2139.8 | 2152.0 | 2132.0 |
| 12.5° | 2140.3 | 2160.8 | 2180.6 | 2186.1 | 2198.1 | 2202.0 | 2194.1 |
| 15° | 2195.7 | 2206.6 | 2207.9 | 2204.8 | 2208.4 | 2205.4 | 2193.9 |
| 17.5° | 2144.0 | 2126.3 | 2090.3 | 2073.3 | 2059.8 | 2039.9 | 2031.9 |
| 20° | 2058.5 | 2006.3 | 1945.6 | 1921.4 | 1892.8 | 1836.9 | 1850.3 |
| 22.5° | 1874.0 | 1814.5 | 1753.8 | 1682.9 | 1649.0 | 1596.1 | 1592.9 |
| 25° | 1586.8 | 1484.2 | 1371.3 | 1292.4 | 1246.3 | 1193.5 | 1170.4 |
| 27.5° | 1233.7 | 1104.6 | 1012.1 | 965.2 | 922.6 | 880.7 | 879.0 |
| 30° | 1001.6 | 904.5 | 832.9 | 792.8 | 766.7 | 749.1 | 752.7 |
| 32.5° | 844.3 | 777.8 | 729.4 | 696.2 | 676.8 | 663.6 | 663.4 |
| 35° | 690.2 | 644.7 | 613.7 | 599.8 | 585.8 | 576.1 | 576.7 |
| 37.5° | 590.7 | 563.3 | 546.1 | 530.7 | 522.0 | 517.2 | 514.5 |
| 40° | 539.6 | 517.2 | 503.8 | 494.7 | 487.4 | 480.8 | 479.6 |
| 42.5° | 499.4 | 480.8 | 467.5 | 460.3 | 453.4 | 448.8 | 447.5 |
| 45° | 443.1 | 427.9 | 415.8 | 408.0 | 404.9 | 400.7 | 400.7 |
| 47.5° | 394.2 | 379.3 | 369.8 | 364.9 | 359.7 | 356.8 | 356.7 |
| 50° | 361.2 | 349.7 | 341.2 | 338.1 | 333.9 | 332.1 | 331.4 |
| 52.5° | 331.6 | 323.0 | 316.9 | 314.8 | 313.0 | 310.7 | 311.1 |
| 55° | 291.4 | 286.5 | 284.1 | 282.3 | 279.2 | 275.6 | 278.1 |
| 57.5° | 257.5 | 253.4 | 246.8 | 241.1 | 238.4 | 235.8 | 236.8 |
| 60° | 233.7 | 225.2 | 216.7 | 210.0 | 208.2 | 202.7 | 202.7 |
| 62.5° | 203.6 | 191.7 | 181.3 | 177.5 | 175.7 | 173.2 | 172.6 |
| 65° | 156.6 | 151.8 | 149.3 | 146.9 | 145.7 | 145.7 | 144.5 |
| 67.5° | 129.8 | 127.9 | 125.2 | 124.5 | 123.3 | 123.0 | 122.6 |
| 70° | 114.7 | 112.3 | 111.1 | 110.5 | 109.2 | 109.9 | 108.1 |
| 72.5° | 100.1 | 98.2 | 98.0 | 96.4 | 95.7 | 95.8 | 94.4 |
| 75° | 78.9 | 78.9 | 78.3 | 77.7 | 76.5 | 75.9 | 76.5 |
| 77.5° | 60.7 | 60.8 | 59.7 | 59.7 | 59.5 | 59.7 | 59.0 |
| 80° | 48.6 | 49.2 | 48.6 | 47.9 | 47.4 | 47.9 | 47.4 |
| 82.5° | 38.3 | 37.5 | 37.4 | 37.3 | 37.2 | 36.8 | 36.7 |
| 85° | 21.9 | 22.5 | 21.9 | 21.2 | 21.2 | 21.2 | 21.9 |
| 87.5° | 12.2 | 12.4 | 12.5 | 12.6 | 12.7 | 12.8 | 12.3 |
| 90° | 19.6 | 20.6 | 21.2 | 21.6 | 22.0 | 22.3 | 22.7 |
| 92.5° | 21.0 | 21.5 | 21.9 | 22.1 | 22.3 | 22.5 | 22.7 |
| 95° | 35.6 | 36.6 | 37.0 | 36.8 | 36.6 | 36.4 | 36.2 |
| 97.5° | 46.2 | 47.0 | 47.5 | 47.7 | 47.9 | 48.1 | 48.3 |
| 100° | 52.5 | 54.0 | 54.9 | 55.3 | 55.7 | 56.1 | 56.4 |
| 102.5° | 55.2 | 57.1 | 58.4 | 58.9 | 59.4 | 60.0 | 60.4 |
| 105° | 57.5 | 59.6 | 61.0 | 61.8 | 62.5 | 63.2 | 64.0 |
| 107.5° | 65.6 | 63.5 | 62.9 | 63.6 | 64.3 | 65.1 | 65.8 |
| 110° | 91.3 | 72.5 | 63.5 | 64.2 | 65.0 | 65.8 | 66.5 |



TEST NUMBER: P331759-927

CATALOG NUMBER: SA2XXRDIP-C1005D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

| | 330° | 335° | 340° | 345° | 350° | 355° | 360° |
|--------|--------|--------|--------|--------|--------|--------|--------|
| 112.5° | 166.9 | 98.6 | 64.8 | 65.4 | 66.0 | 66.6 | 67.2 |
| 115° | 259.7 | 173.0 | 122.9 | 109.5 | 96.0 | 82.5 | 69.1 |
| 117.5° | 512.6 | 491.7 | 459.1 | 414.8 | 370.5 | 326.2 | 281.9 |
| 120° | 624.0 | 626.3 | 614.7 | 589.5 | 564.2 | 538.9 | 513.7 |
| 122.5° | 661.1 | 662.4 | 660.6 | 655.8 | 650.9 | 645.9 | 641.0 |
| 125° | 715.5 | 716.8 | 717.8 | 718.4 | 718.9 | 719.5 | 720.0 |
| 127.5° | 766.5 | 768.4 | 769.4 | 769.5 | 769.7 | 769.8 | 769.8 |
| 130° | 798.6 | 800.7 | 801.6 | 801.5 | 801.2 | 801.1 | 800.9 |
| 132.5° | 829.4 | 831.2 | 831.9 | 831.7 | 831.6 | 831.4 | 831.2 |
| 135° | 873.9 | 875.7 | 876.5 | 876.1 | 875.7 | 875.4 | 875.0 |
| 137.5° | 915.0 | 916.8 | 917.4 | 916.8 | 916.2 | 915.5 | 914.9 |
| 140° | 941.5 | 943.2 | 943.6 | 942.6 | 941.7 | 940.7 | 939.8 |
| 142.5° | 966.0 | 967.5 | 967.8 | 966.9 | 965.9 | 965.0 | 964.1 |
| 145° | 1000.1 | 1001.5 | 1001.6 | 1000.8 | 999.8 | 998.9 | 997.9 |
| 147.5° | 1029.8 | 1030.8 | 1030.9 | 1030.1 | 1029.3 | 1028.5 | 1027.7 |
| 150° | 1048.5 | 1049.6 | 1049.6 | 1048.7 | 1047.8 | 1046.9 | 1045.9 |
| 152.5° | 1065.3 | 1066.4 | 1066.4 | 1065.1 | 1063.9 | 1062.6 | 1061.4 |
| 155° | 1088.1 | 1089.2 | 1088.9 | 1087.4 | 1086.0 | 1084.5 | 1083.0 |
| 157.5° | 1107.3 | 1108.6 | 1108.5 | 1107.1 | 1105.6 | 1104.1 | 1102.6 |
| 160° | 1118.3 | 1119.4 | 1119.4 | 1118.1 | 1116.7 | 1115.5 | 1114.1 |
| 162.5° | 1128.9 | 1130.2 | 1130.0 | 1128.4 | 1126.8 | 1125.1 | 1123.6 |
| 165° | 1141.6 | 1143.0 | 1143.0 | 1141.6 | 1140.3 | 1139.0 | 1137.7 |
| 167.5° | 1152.2 | 1153.6 | 1153.3 | 1151.7 | 1150.0 | 1148.3 | 1146.6 |
| 170° | 1157.6 | 1159.0 | 1158.7 | 1157.1 | 1155.4 | 1153.7 | 1152.0 |
| 172.5° | 1161.7 | 1163.0 | 1162.8 | 1161.1 | 1159.4 | 1157.8 | 1156.0 |
| 175° | 1166.1 | 1167.4 | 1167.1 | 1165.2 | 1163.3 | 1161.5 | 1159.6 |
| 177.5° | 1166.3 | 1167.4 | 1167.2 | 1165.9 | 1164.5 | 1163.2 | 1161.8 |
| 180° | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 | 1163.8 |

(END OF REPORT)