

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: STREETWORKS

Report Number: P945995

Luminaire Tested: **GLAN-SB1D-740-U-SLL**

Issue Date: 1/21/2025

### Test Information

Test Method: LM-79-08  
Report Number: P945995  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/21/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: STREETWORKS  
Catalog Number: GLAN-SB1D-740-U-SLL  
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE  
(1) 70 CRI, 4000K, 900mA LIGHTSQUARE WITH 26 LEDS AND SPILL LIGHT  
ELIMINATOR LEFT OPTICS  
Light Source: -  
Ballast/Driver: -

### Summary

Lumens per Lamp: N/A  
Luminaire Lumens: 10731 lumens  
Efficiency: N/A  
Efficacy: 134.8 lumens/watt  
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')  
IES Classification: Type IV - Short  
BUG Rating: B2 - U0 - G3


Input Watts (W): 79.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



REPORT NUMBER: P945995  
 CATALOG NUMBER: GLAN-SB1D-740-U-SLL

## Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

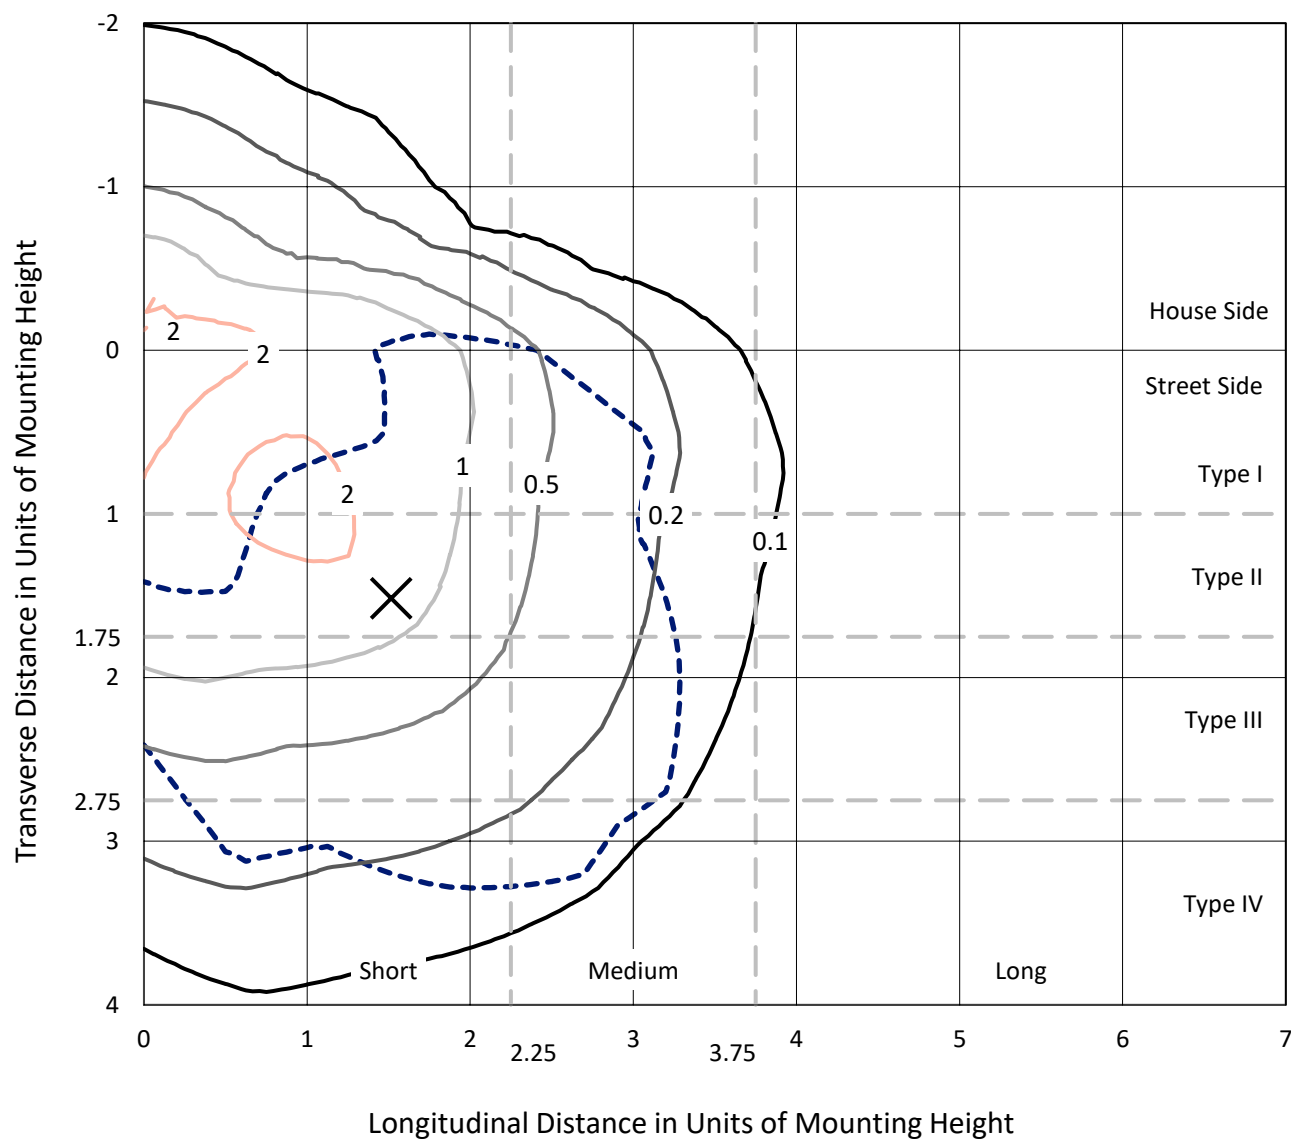

Based on 25 foot mounting height. Maximum calculated value = 3.3 fc  
 Type IV - Short - N/A

REPORT NUMBER: P945995  
CATALOG NUMBER: GLAN-SB1D-740-U-SLL

Luminous Intensity Polar Plot

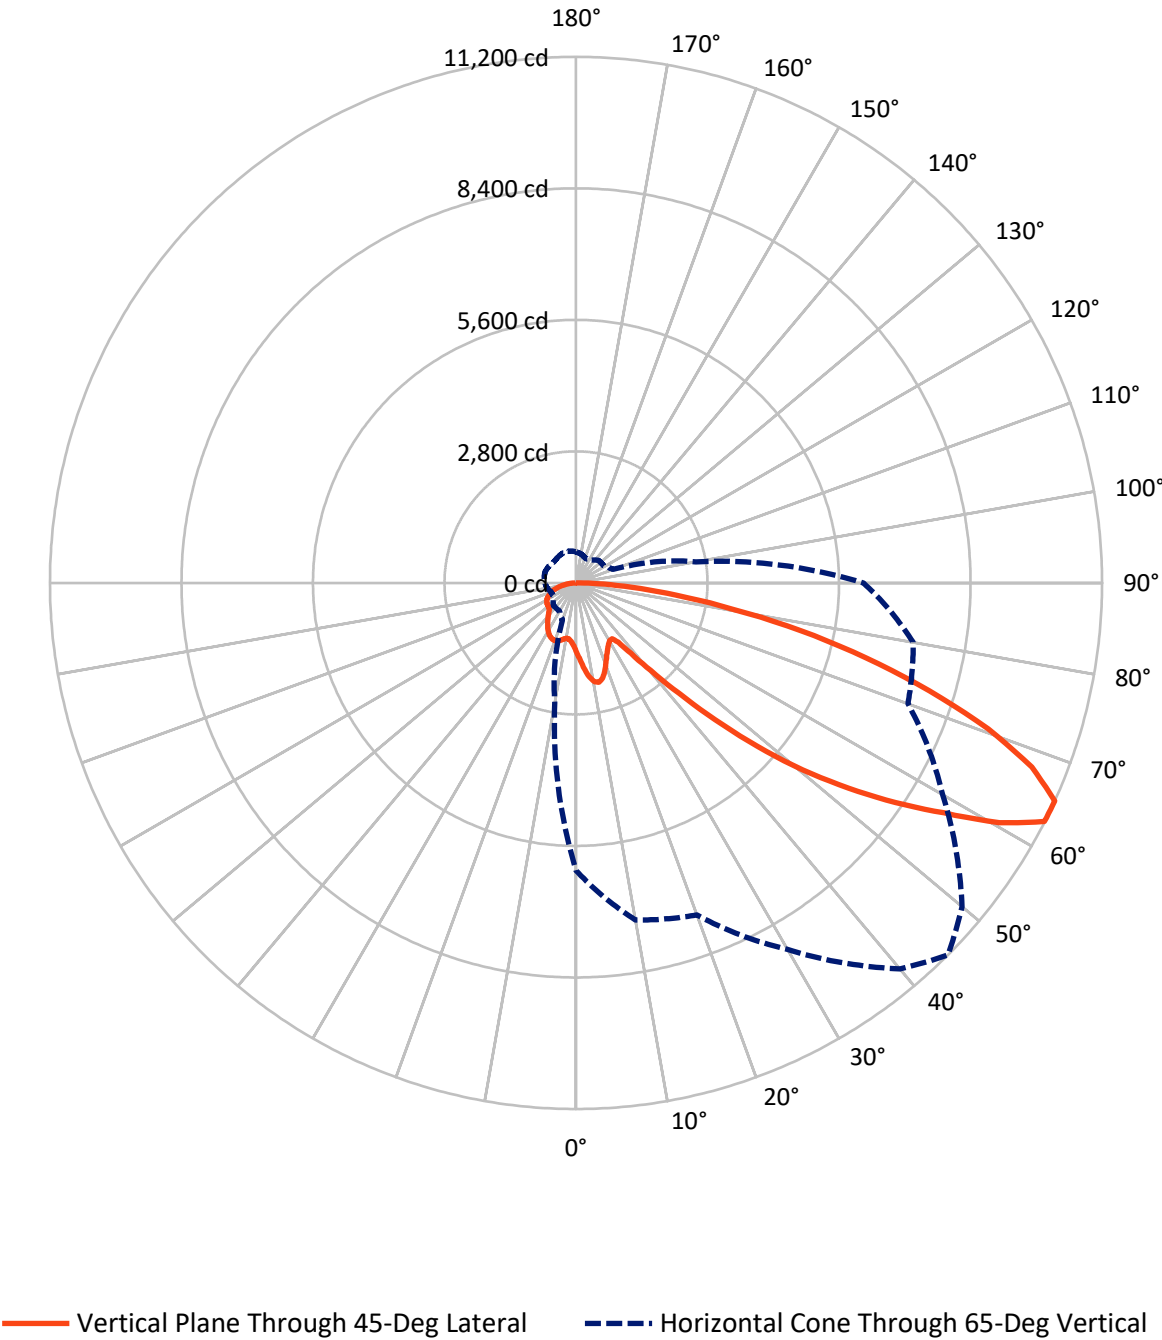

REPORT NUMBER: P945995

CATALOG NUMBER: GLAN-SB1D-740-U-SLL

**FLUX DISTRIBUTION:**

|                    |           | Downward | Upward | Total   |
|--------------------|-----------|----------|--------|---------|
| <b>House Side</b>  | Lumens    | 2727.3   | 0.0    | 2727.3  |
|                    | % Fixture | 25.4     | 0.0    | 25.4    |
| <b>Street Side</b> | Lumens    | 8003.7   | 0.0    | 8003.7  |
|                    | % Fixture | 74.6     | 0.0    | 74.6    |
| <b>Total</b>       | Lumens    | 10731.0  | 0.0    | 10731.0 |
|                    | % Fixture | 100.0    | 0.0    | 100.0   |

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 146.4   | 1.4       |
| 10°-20°   | 459.5   | 4.3       |
| 20°-30°   | 709.8   | 6.6       |
| 30°-40°   | 899.5   | 8.4       |
| 40°-50°   | 1356.6  | 12.6      |
| 50°-60°   | 2191.9  | 20.4      |
| 60°-70°   | 2732.5  | 25.5      |
| 70°-80°   | 1791.8  | 16.7      |
| 80°-90°   | 443.0   | 4.1       |
| 90°-100°  | 0.0     | 0.0       |
| 100°-110° | 0.0     | 0.0       |
| 110°-120° | 0.0     | 0.0       |
| 120°-130° | 0.0     | 0.0       |
| 130°-140° | 0.0     | 0.0       |
| 140°-150° | 0.0     | 0.0       |
| 150°-160° | 0.0     | 0.0       |
| 160°-170° | 0.0     | 0.0       |
| 170°-180° | 0.0     | 0.0       |
| 0°-90°    | 10731.0 | 100.0     |
| 0°-180°   | 10731.0 | 100.0     |

**Coefficient of Utilization**



REPORT NUMBER: P945995


CATALOG NUMBER: GLAN-SB1D-740-U-SLL

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

| Zone |             | Lumens | % Fixture | Zone Rating/Lumen Limit |      |         |
|------|-------------|--------|-----------|-------------------------|------|---------|
|      |             |        |           | B                       | U    | G       |
| FL   | (0°-30°)    | 721.8  | 6.7       |                         |      |         |
| FM   | (30°-60°)   | 3130.0 | 29.2      |                         |      |         |
| FH   | (60°-80°)   | 3787.0 | 35.3      |                         |      | G2/5000 |
| FVH  | (80°-90°)   | 364.9  | 3.4       |                         |      | G3/500  |
| BL   | (0°-30°)    | 593.9  | 5.5       | B2/1000                 |      |         |
| BM   | (30°-60°)   | 1318.0 | 12.3      | B2/2500                 |      |         |
| BH   | (60°-80°)   | 737.3  | 6.9       | B2/1000                 |      | G2/1000 |
| BVH  | (80°-90°)   | 78.1   | 0.7       |                         |      | G1/100  |
| UL   | (90°-100°)  | 0.0    | 0.0       |                         | U0/0 |         |
| UH   | (100°-180°) | 0.0    | 0.0       |                         | U0/0 |         |

**BUG Rating: B2-U0-G3**

Type IV Short

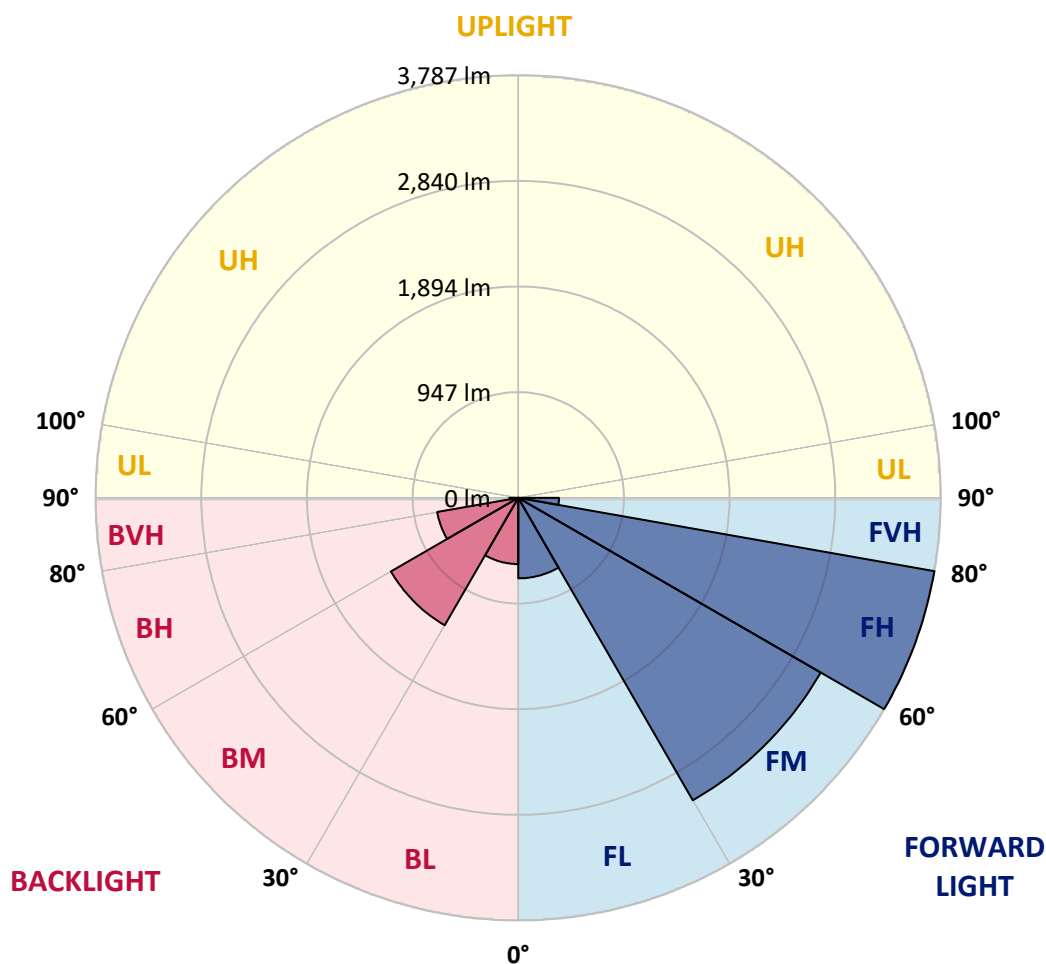

REPORT NUMBER: P945995

CATALOG NUMBER: GLAN-SB1D-740-U-SLL

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     | 5°     | 10°    | 15°    | 20°    | 25°    | 30°    | 35°    | 40°     | 45°     |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|---------|---------|
| 0°    | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6  | 1475.6  |
| 2.5°  | 1586.9 | 1592.9 | 1598.9 | 1607.5 | 1616.0 | 1621.1 | 1626.2 | 1628.8 | 1631.3  | 1630.2  |
| 5°    | 1706.3 | 1727.4 | 1748.4 | 1769.3 | 1790.1 | 1801.5 | 1812.8 | 1819.6 | 1826.6  | 1831.8  |
| 7.5°  | 1826.4 | 1860.6 | 1894.7 | 1925.5 | 1956.2 | 1974.7 | 1993.3 | 2003.3 | 2013.2  | 2018.1  |
| 10°   | 1918.4 | 1958.8 | 1999.3 | 2035.3 | 2071.4 | 2093.3 | 2115.0 | 2124.7 | 2134.4  | 2138.1  |
| 12.5° | 1974.7 | 2018.6 | 2062.3 | 2095.0 | 2127.5 | 2143.3 | 2159.2 | 2164.5 | 2169.8  | 2170.4  |
| 15°   | 2009.0 | 2046.8 | 2084.6 | 2105.0 | 2125.5 | 2126.1 | 2126.7 | 2121.0 | 2115.3  | 2108.7  |
| 17.5° | 2028.2 | 2053.8 | 2079.3 | 2079.7 | 2080.1 | 2057.1 | 2034.2 | 2013.2 | 1992.1  | 1977.3  |
| 20°   | 2049.5 | 2058.4 | 2067.3 | 2040.4 | 2013.5 | 1962.9 | 1912.3 | 1875.4 | 1838.6  | 1815.9  |
| 22.5° | 2074.1 | 2062.4 | 2050.8 | 1995.1 | 1939.4 | 1864.9 | 1790.4 | 1744.3 | 1698.2  | 1673.2  |
| 25°   | 2105.8 | 2069.0 | 2032.2 | 1947.6 | 1863.0 | 1772.6 | 1682.2 | 1633.7 | 1585.3  | 1561.7  |
| 27.5° | 2148.9 | 2083.1 | 2017.2 | 1905.1 | 1793.1 | 1692.9 | 1592.7 | 1545.0 | 1497.4  | 1475.0  |
| 30°   | 2206.9 | 2108.8 | 2010.7 | 1872.8 | 1734.8 | 1630.4 | 1526.0 | 1481.8 | 1437.6  | 1416.7  |
| 32.5° | 2275.4 | 2141.0 | 2006.7 | 1850.7 | 1694.6 | 1596.5 | 1498.4 | 1463.7 | 1428.9  | 1413.9  |
| 35°   | 2358.6 | 2194.2 | 2029.8 | 1867.2 | 1704.6 | 1636.5 | 1568.4 | 1560.3 | 1552.2  | 1550.9  |
| 37.5° | 2498.8 | 2305.4 | 2111.9 | 1964.2 | 1816.4 | 1811.9 | 1807.5 | 1844.6 | 1881.6  | 1900.8  |
| 40°   | 2710.6 | 2500.2 | 2289.8 | 2179.9 | 2070.0 | 2147.6 | 2225.2 | 2315.2 | 2405.2  | 2450.1  |
| 42.5° | 2991.4 | 2782.7 | 2574.0 | 2510.7 | 2447.4 | 2616.6 | 2785.8 | 2949.5 | 3113.3  | 3209.4  |
| 45°   | 3338.2 | 3150.8 | 2963.2 | 2935.3 | 2907.3 | 3178.4 | 3449.5 | 3718.6 | 3987.7  | 4151.1  |
| 47.5° | 3772.0 | 3589.6 | 3407.1 | 3401.5 | 3395.8 | 3786.9 | 4177.8 | 4571.7 | 4965.6  | 5196.9  |
| 50°   | 4340.5 | 4115.2 | 3889.9 | 3890.9 | 3891.8 | 4395.8 | 4899.7 | 5419.7 | 5939.7  | 6254.1  |
| 52.5° | 4993.0 | 4720.2 | 4447.5 | 4419.9 | 4392.3 | 4994.2 | 5596.2 | 6239.6 | 6882.9  | 7259.7  |
| 55°   | 5687.8 | 5418.3 | 5148.8 | 5041.2 | 4933.7 | 5603.7 | 6273.6 | 7040.5 | 7807.5  | 8255.7  |
| 57.5° | 6319.7 | 6173.0 | 6026.1 | 5810.5 | 5594.8 | 6271.3 | 6947.8 | 7816.5 | 8685.2  | 9240.9  |
| 60°   | 6701.7 | 6929.6 | 7157.6 | 6889.8 | 6622.0 | 7262.2 | 7902.4 | 8832.5 | 9762.5  | 10363.2 |
| 62.5° | 6507.7 | 7130.6 | 7753.6 | 7723.4 | 7693.1 | 8279.6 | 8866.1 | 9751.0 | 10635.8 | 11191.0 |
| 65°   | 6119.6 | 6704.2 | 7288.8 | 7404.5 | 7520.1 | 8265.4 | 9010.8 | 9868.8 | 10726.8 | 11199.5 |
| 67.5° | 5599.5 | 6155.5 | 6711.6 | 6765.8 | 6820.0 | 7596.5 | 8373.0 | 9234.8 | 10096.5 | 10466.8 |
| 70°   | 4974.6 | 5579.4 | 6184.3 | 6208.5 | 6232.8 | 6927.2 | 7621.6 | 8363.2 | 9104.8  | 9310.6  |
| 72.5° | 4230.0 | 4924.1 | 5618.2 | 5635.6 | 5653.0 | 6196.3 | 6739.6 | 7295.0 | 7850.4  | 7871.2  |
| 75°   | 3288.1 | 4006.4 | 4724.8 | 4789.3 | 4853.8 | 5276.4 | 5699.1 | 6090.1 | 6481.1  | 6376.4  |
| 77.5° | 2349.3 | 3019.8 | 3690.4 | 3782.7 | 3875.0 | 4196.4 | 4517.7 | 4795.0 | 5072.3  | 4892.3  |
| 80°   | 1537.6 | 2101.7 | 2665.8 | 2780.5 | 2895.3 | 3138.0 | 3380.5 | 3526.2 | 3671.7  | 3382.1  |
| 82.5° | 893.8  | 1279.5 | 1665.2 | 1793.3 | 1921.5 | 2088.6 | 2255.6 | 2316.3 | 2377.0  | 2149.4  |
| 85°   | 393.2  | 597.9  | 802.6  | 911.6  | 1020.6 | 1157.9 | 1295.1 | 1329.6 | 1364.1  | 1181.7  |
| 87.5° | 121.7  | 190.5  | 259.3  | 320.1  | 381.0  | 449.6  | 518.2  | 521.2  | 524.0   | 440.0   |
| 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0     | 0.0     |

REPORT NUMBER: P945995

CATALOG NUMBER: GLAN-SB1D-740-U-SLL

**CANDELA DISTRIBUTION (continued):**

| 50°     |       | 55°    | 60°    | 65°    | 70°    | 75°    | 80°    | 85°    | 90°    | 95°    | 100°   |
|---------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1475.6  | 0°    | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 |
| 1631.3  | 2.5°  | 1628.8 | 1626.2 | 1621.1 | 1616.0 | 1607.5 | 1598.9 | 1592.9 | 1586.9 | 1574.7 | 1562.5 |
| 1826.6  | 5°    | 1819.6 | 1812.8 | 1801.5 | 1790.1 | 1769.3 | 1748.4 | 1727.4 | 1706.3 | 1679.4 | 1652.6 |
| 2013.2  | 7.5°  | 2003.3 | 1993.3 | 1974.7 | 1956.2 | 1925.5 | 1894.7 | 1860.6 | 1826.4 | 1782.0 | 1737.7 |
| 2134.4  | 10°   | 2124.7 | 2115.0 | 2093.3 | 2071.4 | 2035.3 | 1999.3 | 1958.8 | 1918.4 | 1862.3 | 1806.2 |
| 2169.8  | 12.5° | 2164.5 | 2159.2 | 2143.3 | 2127.5 | 2095.0 | 2062.3 | 2018.6 | 1974.7 | 1913.1 | 1851.5 |
| 2115.3  | 15°   | 2121.0 | 2126.7 | 2126.1 | 2125.5 | 2105.0 | 2084.6 | 2046.8 | 2009.0 | 1944.7 | 1880.5 |
| 1992.1  | 17.5° | 2013.2 | 2034.2 | 2057.1 | 2080.1 | 2079.7 | 2079.3 | 2053.8 | 2028.2 | 1963.1 | 1897.9 |
| 1838.6  | 20°   | 1875.4 | 1912.3 | 1962.9 | 2013.5 | 2040.4 | 2067.3 | 2058.4 | 2049.5 | 1981.8 | 1914.0 |
| 1698.2  | 22.5° | 1744.3 | 1790.4 | 1864.9 | 1939.4 | 1995.1 | 2050.8 | 2062.4 | 2074.1 | 2004.9 | 1935.7 |
| 1585.3  | 25°   | 1633.7 | 1682.2 | 1772.6 | 1863.0 | 1947.6 | 2032.2 | 2069.0 | 2105.8 | 2038.0 | 1970.2 |
| 1497.4  | 27.5° | 1545.0 | 1592.7 | 1692.9 | 1793.1 | 1905.1 | 2017.2 | 2083.1 | 2148.9 | 2084.2 | 2019.5 |
| 1437.6  | 30°   | 1481.8 | 1526.0 | 1630.4 | 1734.8 | 1872.8 | 2010.7 | 2108.8 | 2206.9 | 2144.4 | 2081.9 |
| 1428.9  | 32.5° | 1463.7 | 1498.4 | 1596.5 | 1694.6 | 1850.7 | 2006.7 | 2141.0 | 2275.4 | 2213.5 | 2151.7 |
| 1552.2  | 35°   | 1560.3 | 1568.4 | 1636.5 | 1704.6 | 1867.2 | 2029.8 | 2194.2 | 2358.6 | 2299.4 | 2240.1 |
| 1881.6  | 37.5° | 1844.6 | 1807.5 | 1811.9 | 1816.4 | 1964.2 | 2111.9 | 2305.4 | 2498.8 | 2423.3 | 2347.7 |
| 2405.2  | 40°   | 2315.2 | 2225.2 | 2147.6 | 2070.0 | 2179.9 | 2289.8 | 2500.2 | 2710.6 | 2600.5 | 2490.4 |
| 3113.3  | 42.5° | 2949.5 | 2785.8 | 2616.6 | 2447.4 | 2510.7 | 2574.0 | 2782.7 | 2991.4 | 2832.5 | 2673.6 |
| 3987.7  | 45°   | 3718.6 | 3449.5 | 3178.4 | 2907.3 | 2935.3 | 2963.2 | 3150.8 | 3338.2 | 3123.9 | 2909.6 |
| 4965.6  | 47.5° | 4571.7 | 4177.8 | 3786.9 | 3395.8 | 3401.5 | 3407.1 | 3589.6 | 3772.0 | 3470.3 | 3168.6 |
| 5939.7  | 50°   | 5419.7 | 4899.7 | 4395.8 | 3891.8 | 3890.9 | 3889.9 | 4115.2 | 4340.5 | 3885.7 | 3430.9 |
| 6882.9  | 52.5° | 6239.6 | 5596.2 | 4994.2 | 4392.3 | 4419.9 | 4447.5 | 4720.2 | 4993.0 | 4322.1 | 3651.1 |
| 7807.5  | 55°   | 7040.5 | 6273.6 | 5603.7 | 4933.7 | 5041.2 | 5148.8 | 5418.3 | 5687.8 | 4708.9 | 3730.1 |
| 8685.2  | 57.5° | 7816.5 | 6947.8 | 6271.3 | 5594.8 | 5810.5 | 6026.1 | 6173.0 | 6319.7 | 4983.1 | 3646.4 |
| 9762.5  | 60°   | 8832.5 | 7902.4 | 7262.2 | 6622.0 | 6889.8 | 7157.6 | 6929.6 | 6701.7 | 5051.6 | 3401.5 |
| 10635.8 | 62.5° | 9751.0 | 8866.1 | 8279.6 | 7693.1 | 7723.4 | 7753.6 | 7130.6 | 6507.7 | 4763.1 | 3018.5 |
| 10726.8 | 65°   | 9868.8 | 9010.8 | 8265.4 | 7520.1 | 7404.5 | 7288.8 | 6704.2 | 6119.6 | 4354.9 | 2590.2 |
| 10096.5 | 67.5° | 9234.8 | 8373.0 | 7596.5 | 6820.0 | 6765.8 | 6711.6 | 6155.5 | 5599.5 | 3869.1 | 2138.8 |
| 9104.8  | 70°   | 8363.2 | 7621.6 | 6927.2 | 6232.8 | 6208.5 | 6184.3 | 5579.4 | 4974.6 | 3339.1 | 1703.5 |
| 7850.4  | 72.5° | 7295.0 | 6739.6 | 6196.3 | 5653.0 | 5635.6 | 5618.2 | 4924.1 | 4230.0 | 2764.5 | 1298.9 |
| 6481.1  | 75°   | 6090.1 | 5699.1 | 5276.4 | 4853.8 | 4789.3 | 4724.8 | 4006.4 | 3288.1 | 2105.8 | 923.4  |
| 5072.3  | 77.5° | 4795.0 | 4517.7 | 4196.4 | 3875.0 | 3782.7 | 3690.4 | 3019.8 | 2349.3 | 1473.8 | 598.4  |
| 3671.7  | 80°   | 3526.2 | 3380.5 | 3138.0 | 2895.3 | 2780.5 | 2665.8 | 2101.7 | 1537.6 | 949.6  | 361.5  |
| 2377.0  | 82.5° | 2316.3 | 2255.6 | 2088.6 | 1921.5 | 1793.3 | 1665.2 | 1279.5 | 893.8  | 549.6  | 205.4  |
| 1364.1  | 85°   | 1329.6 | 1295.1 | 1157.9 | 1020.6 | 911.6  | 802.6  | 597.9  | 393.2  | 247.2  | 101.2  |
| 524.0   | 87.5° | 521.2  | 518.2  | 449.6  | 381.0  | 320.1  | 259.3  | 190.5  | 121.7  | 81.0   | 40.2   |
| 0.0     | 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

REPORT NUMBER: P945995

CATALOG NUMBER: GLAN-SB1D-740-U-SLL

**CANDELA DISTRIBUTION (continued):**

| 105°   |       | 110°   | 115°   | 120°   | 125°   | 130°   | 135°   | 140°   | 145°   | 150°   | 155°   |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1475.6 | 0°    | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 |
| 1549.6 | 2.5°  | 1536.6 | 1523.6 | 1510.6 | 1498.1 | 1485.7 | 1473.6 | 1460.2 | 1449.3 | 1438.5 | 1428.7 |
| 1625.7 | 5°    | 1598.9 | 1571.9 | 1545.0 | 1519.8 | 1494.6 | 1470.8 | 1447.3 | 1426.8 | 1406.2 | 1389.0 |
| 1696.7 | 7.5°  | 1655.7 | 1615.7 | 1575.8 | 1540.7 | 1505.5 | 1473.1 | 1442.7 | 1415.4 | 1388.1 | 1365.5 |
| 1752.0 | 10°   | 1697.9 | 1649.4 | 1600.9 | 1559.3 | 1517.6 | 1477.6 | 1444.9 | 1416.2 | 1387.4 | 1364.7 |
| 1790.1 | 12.5° | 1728.7 | 1671.5 | 1614.3 | 1567.3 | 1520.2 | 1478.2 | 1447.7 | 1424.2 | 1400.7 | 1385.7 |
| 1813.9 | 15°   | 1747.3 | 1681.4 | 1615.6 | 1561.1 | 1506.6 | 1460.0 | 1435.7 | 1424.4 | 1413.2 | 1415.2 |
| 1825.3 | 17.5° | 1752.6 | 1676.2 | 1599.7 | 1534.2 | 1468.7 | 1413.9 | 1398.9 | 1403.0 | 1407.1 | 1431.8 |
| 1834.1 | 20°   | 1754.3 | 1661.7 | 1569.0 | 1487.8 | 1406.6 | 1342.8 | 1338.9 | 1358.1 | 1377.4 | 1420.2 |
| 1846.1 | 22.5° | 1756.6 | 1643.9 | 1531.2 | 1433.4 | 1335.6 | 1263.0 | 1270.7 | 1299.2 | 1327.7 | 1376.6 |
| 1867.9 | 25°   | 1765.5 | 1626.3 | 1487.2 | 1372.7 | 1258.2 | 1183.7 | 1204.7 | 1237.5 | 1270.3 | 1314.3 |
| 1901.9 | 27.5° | 1784.2 | 1614.6 | 1445.0 | 1317.1 | 1189.2 | 1121.4 | 1146.9 | 1178.6 | 1210.3 | 1246.5 |
| 1945.9 | 30°   | 1809.8 | 1609.1 | 1408.3 | 1270.7 | 1133.0 | 1076.1 | 1096.1 | 1121.3 | 1146.5 | 1176.5 |
| 1991.8 | 32.5° | 1831.9 | 1602.3 | 1372.7 | 1230.7 | 1088.6 | 1042.7 | 1051.6 | 1066.5 | 1081.4 | 1105.3 |
| 2044.1 | 35°   | 1848.1 | 1589.5 | 1331.1 | 1191.3 | 1051.5 | 1013.3 | 1009.6 | 1013.7 | 1017.8 | 1036.1 |
| 2102.7 | 37.5° | 1857.7 | 1567.6 | 1277.5 | 1145.0 | 1012.4 | 979.0  | 965.5  | 961.0  | 956.5  | 969.6  |
| 2177.1 | 40°   | 1863.8 | 1537.4 | 1211.2 | 1089.7 | 968.3  | 938.0  | 917.3  | 907.0  | 896.8  | 906.3  |
| 2274.4 | 42.5° | 1875.3 | 1506.3 | 1137.5 | 1028.7 | 920.0  | 892.1  | 866.1  | 852.5  | 838.9  | 846.6  |
| 2402.5 | 45°   | 1895.5 | 1477.4 | 1059.3 | 964.0  | 868.6  | 840.3  | 815.1  | 801.8  | 788.7  | 795.1  |
| 2539.0 | 47.5° | 1909.3 | 1453.5 | 997.6  | 912.7  | 827.8  | 791.3  | 769.6  | 758.5  | 747.4  | 753.5  |
| 2665.6 | 50°   | 1900.3 | 1427.4 | 954.6  | 878.7  | 802.8  | 754.8  | 729.6  | 719.7  | 709.9  | 719.5  |
| 2747.8 | 52.5° | 1844.5 | 1383.4 | 922.4  | 856.3  | 790.2  | 735.0  | 699.8  | 690.0  | 680.3  | 694.7  |
| 2729.7 | 55°   | 1729.3 | 1310.5 | 891.7  | 840.0  | 788.3  | 737.0  | 683.9  | 668.5  | 653.2  | 673.5  |
| 2602.2 | 57.5° | 1558.0 | 1207.7 | 857.3  | 820.8  | 784.2  | 738.9  | 674.4  | 652.0  | 629.5  | 651.4  |
| 2364.9 | 60°   | 1328.3 | 1074.1 | 820.0  | 791.3  | 762.6  | 732.7  | 665.4  | 636.4  | 607.3  | 626.5  |
| 2044.0 | 62.5° | 1069.5 | 914.4  | 759.2  | 740.1  | 721.1  | 717.4  | 655.0  | 618.7  | 582.4  | 594.5  |
| 1716.6 | 65°   | 843.0  | 770.6  | 698.2  | 689.2  | 680.2  | 680.6  | 633.0  | 594.4  | 555.8  | 560.5  |
| 1395.9 | 67.5° | 653.0  | 632.4  | 611.8  | 616.9  | 621.8  | 620.6  | 593.9  | 561.7  | 529.5  | 528.1  |
| 1099.1 | 70°   | 494.6  | 500.5  | 506.3  | 529.7  | 552.9  | 552.9  | 544.2  | 521.3  | 498.4  | 493.3  |
| 840.2  | 72.5° | 381.5  | 399.3  | 417.0  | 450.1  | 483.1  | 488.7  | 488.8  | 473.1  | 457.4  | 449.9  |
| 609.8  | 75°   | 296.3  | 312.3  | 328.4  | 365.4  | 402.5  | 428.1  | 425.9  | 413.9  | 401.7  | 394.6  |
| 413.2  | 77.5° | 228.1  | 239.0  | 250.0  | 285.9  | 321.9  | 364.1  | 363.0  | 353.3  | 343.6  | 336.3  |
| 266.2  | 80°   | 171.0  | 175.5  | 180.1  | 210.5  | 240.9  | 291.3  | 291.2  | 283.1  | 274.9  | 268.8  |
| 163.8  | 82.5° | 122.2  | 123.0  | 123.9  | 146.3  | 168.7  | 211.8  | 214.1  | 210.2  | 206.2  | 201.9  |
| 87.5   | 85°   | 73.9   | 73.5   | 73.0   | 89.5   | 105.9  | 137.9  | 141.0  | 136.7  | 132.5  | 127.7  |
| 36.3   | 87.5° | 32.4   | 32.0   | 31.6   | 38.3   | 45.0   | 58.3   | 62.3   | 60.6   | 58.9   | 58.0   |
| 0.0    | 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

REPORT NUMBER: P945995

CATALOG NUMBER: GLAN-SB1D-740-U-SLL

**CANDELA DISTRIBUTION (continued):**

| 160°   |       | 165°   | 170°   | 175°   | 180°   | 185°   | 190°   | 195°   | 200°   | 205°   | 210°   |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1475.6 | 0°    | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 |
| 1419.0 | 2.5°  | 1410.4 | 1401.9 | 1393.3 | 1384.7 | 1378.1 | 1371.4 | 1366.0 | 1360.7 | 1356.5 | 1352.3 |
| 1371.9 | 5°    | 1356.7 | 1341.5 | 1327.8 | 1313.9 | 1303.4 | 1292.7 | 1285.3 | 1277.9 | 1272.6 | 1267.3 |
| 1342.8 | 7.5°  | 1323.7 | 1304.6 | 1287.7 | 1270.9 | 1258.3 | 1245.7 | 1236.9 | 1228.0 | 1222.0 | 1216.0 |
| 1342.1 | 10°   | 1321.5 | 1300.9 | 1282.0 | 1263.0 | 1247.9 | 1232.8 | 1223.0 | 1213.0 | 1207.3 | 1201.5 |
| 1370.7 | 12.5° | 1354.5 | 1338.5 | 1318.8 | 1299.2 | 1280.0 | 1260.7 | 1248.0 | 1235.2 | 1228.8 | 1222.5 |
| 1417.3 | 15°   | 1413.1 | 1408.9 | 1391.9 | 1374.8 | 1347.4 | 1320.0 | 1300.6 | 1281.3 | 1272.4 | 1263.6 |
| 1456.5 | 17.5° | 1469.6 | 1482.7 | 1468.9 | 1455.2 | 1418.9 | 1382.6 | 1354.1 | 1325.6 | 1312.4 | 1299.2 |
| 1463.1 | 20°   | 1490.6 | 1518.1 | 1511.7 | 1505.3 | 1463.8 | 1422.4 | 1387.4 | 1352.4 | 1335.6 | 1318.8 |
| 1425.7 | 22.5° | 1461.4 | 1497.1 | 1501.0 | 1504.8 | 1465.1 | 1425.5 | 1389.5 | 1353.4 | 1335.7 | 1317.9 |
| 1358.4 | 25°   | 1393.6 | 1428.7 | 1441.9 | 1454.9 | 1422.4 | 1390.0 | 1357.9 | 1326.0 | 1310.6 | 1295.3 |
| 1282.6 | 27.5° | 1310.8 | 1339.0 | 1353.6 | 1368.3 | 1345.1 | 1322.0 | 1297.2 | 1272.3 | 1262.0 | 1251.7 |
| 1206.5 | 30°   | 1229.9 | 1253.4 | 1265.2 | 1277.1 | 1259.5 | 1241.9 | 1224.1 | 1206.2 | 1200.9 | 1195.6 |
| 1129.4 | 32.5° | 1151.8 | 1174.3 | 1187.4 | 1200.7 | 1184.5 | 1168.3 | 1154.0 | 1139.8 | 1136.4 | 1132.9 |
| 1054.3 | 35°   | 1076.5 | 1098.8 | 1114.6 | 1130.5 | 1118.9 | 1107.4 | 1094.3 | 1081.2 | 1076.0 | 1070.7 |
| 982.7  | 37.5° | 1004.8 | 1027.0 | 1046.6 | 1066.2 | 1060.9 | 1055.6 | 1043.5 | 1031.4 | 1021.8 | 1012.3 |
| 915.7  | 40°   | 937.1  | 958.5  | 981.1  | 1003.6 | 1005.0 | 1006.2 | 995.9  | 985.7  | 971.8  | 958.0  |
| 854.3  | 42.5° | 874.6  | 894.9  | 919.3  | 943.6  | 950.1  | 956.7  | 948.0  | 939.4  | 922.1  | 904.8  |
| 801.7  | 45°   | 820.9  | 840.2  | 865.4  | 890.7  | 900.0  | 909.4  | 901.6  | 893.8  | 874.0  | 854.3  |
| 759.6  | 47.5° | 778.5  | 797.3  | 822.2  | 847.1  | 857.8  | 868.6  | 863.2  | 857.7  | 840.2  | 822.6  |
| 729.0  | 50°   | 746.8  | 764.5  | 786.8  | 809.1  | 823.0  | 836.8  | 836.4  | 836.2  | 822.2  | 808.1  |
| 708.9  | 52.5° | 725.2  | 741.5  | 762.3  | 783.1  | 799.5  | 815.8  | 818.8  | 821.7  | 810.3  | 798.8  |
| 693.7  | 55°   | 711.3  | 728.9  | 747.1  | 765.3  | 782.6  | 800.0  | 804.1  | 808.1  | 798.2  | 788.2  |
| 673.3  | 57.5° | 693.9  | 714.5  | 732.5  | 750.5  | 768.0  | 785.5  | 789.6  | 793.7  | 783.7  | 773.6  |
| 645.6  | 60°   | 669.3  | 693.0  | 711.2  | 729.6  | 747.1  | 764.7  | 769.2  | 773.8  | 763.9  | 754.1  |
| 606.7  | 62.5° | 634.3  | 661.9  | 681.5  | 701.0  | 717.1  | 733.2  | 737.5  | 741.9  | 733.0  | 724.1  |
| 565.1  | 65°   | 594.7  | 624.3  | 643.0  | 661.6  | 675.8  | 690.0  | 694.4  | 698.8  | 690.3  | 681.7  |
| 526.6  | 67.5° | 553.9  | 581.2  | 599.0  | 616.6  | 628.9  | 641.1  | 645.4  | 649.8  | 641.9  | 634.1  |
| 488.2  | 70°   | 512.2  | 536.2  | 551.5  | 566.8  | 577.8  | 588.9  | 593.1  | 597.3  | 590.9  | 584.5  |
| 442.5  | 72.5° | 461.4  | 480.3  | 494.1  | 507.9  | 518.7  | 529.5  | 534.5  | 539.5  | 534.2  | 528.9  |
| 387.4  | 75°   | 401.5  | 415.5  | 428.0  | 440.5  | 450.4  | 460.2  | 465.4  | 470.7  | 468.0  | 465.4  |
| 329.1  | 77.5° | 340.5  | 351.9  | 362.7  | 373.4  | 383.8  | 394.1  | 399.0  | 403.8  | 400.2  | 396.5  |
| 262.7  | 80°   | 272.2  | 281.7  | 290.8  | 299.8  | 307.7  | 315.5  | 322.0  | 328.4  | 326.8  | 325.3  |
| 197.6  | 82.5° | 196.8  | 196.0  | 192.9  | 189.7  | 206.4  | 223.2  | 234.2  | 245.2  | 244.5  | 243.8  |
| 122.9  | 85°   | 118.8  | 114.7  | 105.9  | 97.1   | 112.8  | 128.5  | 142.1  | 155.7  | 154.6  | 153.4  |
| 57.1   | 87.5° | 56.9   | 56.7   | 50.1   | 43.3   | 49.9   | 56.5   | 62.0   | 67.5   | 66.1   | 64.7   |
| 0.0    | 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

REPORT NUMBER: P945995

CATALOG NUMBER: GLAN-SB1D-740-U-SLL

**CANDELA DISTRIBUTION (continued):**

| 215°   |       | 220°   | 225°   | 230°   | 235°   | 240°   | 245°   | 250°   | 255°   | 260°   | 265°   |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1475.6 | 0°    | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 |
| 1348.4 | 2.5°  | 1344.5 | 1339.7 | 1344.5 | 1348.4 | 1352.3 | 1356.5 | 1360.7 | 1366.0 | 1371.4 | 1378.1 |
| 1263.3 | 5°    | 1259.3 | 1255.3 | 1259.3 | 1263.3 | 1267.3 | 1272.6 | 1277.9 | 1285.3 | 1292.7 | 1303.4 |
| 1212.4 | 7.5°  | 1208.8 | 1206.1 | 1208.8 | 1212.4 | 1216.0 | 1222.0 | 1228.0 | 1236.9 | 1245.7 | 1258.3 |
| 1198.5 | 10°   | 1195.4 | 1194.2 | 1195.4 | 1198.5 | 1201.5 | 1207.3 | 1213.0 | 1223.0 | 1232.8 | 1247.9 |
| 1219.9 | 12.5° | 1217.3 | 1216.8 | 1217.3 | 1219.9 | 1222.5 | 1228.8 | 1235.2 | 1248.0 | 1260.7 | 1280.0 |
| 1260.2 | 15°   | 1256.8 | 1256.5 | 1256.8 | 1260.2 | 1263.6 | 1272.4 | 1281.3 | 1300.6 | 1320.0 | 1347.4 |
| 1294.9 | 17.5° | 1290.6 | 1289.9 | 1290.6 | 1294.9 | 1299.2 | 1312.4 | 1325.6 | 1354.1 | 1382.6 | 1418.9 |
| 1313.4 | 20°   | 1308.0 | 1306.3 | 1308.0 | 1313.4 | 1318.8 | 1335.6 | 1352.4 | 1387.4 | 1422.4 | 1463.8 |
| 1312.0 | 22.5° | 1306.0 | 1303.5 | 1306.0 | 1312.0 | 1317.9 | 1335.7 | 1353.4 | 1389.5 | 1425.5 | 1465.1 |
| 1289.7 | 25°   | 1284.1 | 1280.8 | 1284.1 | 1289.7 | 1295.3 | 1310.6 | 1326.0 | 1357.9 | 1390.0 | 1422.4 |
| 1249.1 | 27.5° | 1246.6 | 1245.7 | 1246.6 | 1249.1 | 1251.7 | 1262.0 | 1272.3 | 1297.2 | 1322.0 | 1345.1 |
| 1195.6 | 30°   | 1195.6 | 1196.5 | 1195.6 | 1195.6 | 1195.6 | 1200.9 | 1206.2 | 1224.1 | 1241.9 | 1259.5 |
| 1133.4 | 32.5° | 1133.9 | 1134.7 | 1133.9 | 1133.4 | 1132.9 | 1136.4 | 1139.8 | 1154.0 | 1168.3 | 1184.5 |
| 1069.6 | 35°   | 1068.5 | 1067.9 | 1068.5 | 1069.6 | 1070.7 | 1076.0 | 1081.2 | 1094.3 | 1107.4 | 1118.9 |
| 1007.3 | 37.5° | 1002.2 | 999.4  | 1002.2 | 1007.3 | 1012.3 | 1021.8 | 1031.4 | 1043.5 | 1055.6 | 1060.9 |
| 948.6  | 40°   | 939.3  | 933.7  | 939.3  | 948.6  | 958.0  | 971.8  | 985.7  | 995.9  | 1006.2 | 1005.0 |
| 891.2  | 42.5° | 877.5  | 868.6  | 877.5  | 891.2  | 904.8  | 922.1  | 939.4  | 948.0  | 956.7  | 950.1  |
| 838.3  | 45°   | 822.3  | 812.0  | 822.3  | 838.3  | 854.3  | 874.0  | 893.8  | 901.6  | 909.4  | 900.0  |
| 807.8  | 47.5° | 793.0  | 783.1  | 793.0  | 807.8  | 822.6  | 840.2  | 857.7  | 863.2  | 868.6  | 857.8  |
| 794.4  | 50°   | 780.7  | 771.2  | 780.7  | 794.4  | 808.1  | 822.2  | 836.2  | 836.4  | 836.8  | 823.0  |
| 786.6  | 52.5° | 774.3  | 765.5  | 774.3  | 786.6  | 798.8  | 810.3  | 821.7  | 818.8  | 815.8  | 799.5  |
| 777.4  | 55°   | 766.7  | 758.8  | 766.7  | 777.4  | 788.2  | 798.2  | 808.1  | 804.1  | 800.0  | 782.6  |
| 762.9  | 57.5° | 752.2  | 744.0  | 752.2  | 762.9  | 773.6  | 783.7  | 793.7  | 789.6  | 785.5  | 768.0  |
| 743.1  | 60°   | 732.1  | 723.6  | 732.1  | 743.1  | 754.1  | 763.9  | 773.8  | 769.2  | 764.7  | 747.1  |
| 712.5  | 62.5° | 701.0  | 690.8  | 701.0  | 712.5  | 724.1  | 733.0  | 741.9  | 737.5  | 733.2  | 717.1  |
| 670.5  | 65°   | 659.4  | 650.6  | 659.4  | 670.5  | 681.7  | 690.3  | 698.8  | 694.4  | 690.0  | 675.8  |
| 623.6  | 67.5° | 613.2  | 605.3  | 613.2  | 623.6  | 634.1  | 641.9  | 649.8  | 645.4  | 641.1  | 628.9  |
| 574.5  | 70°   | 564.5  | 555.5  | 564.5  | 574.5  | 584.5  | 590.9  | 597.3  | 593.1  | 588.9  | 577.8  |
| 519.3  | 72.5° | 509.9  | 501.1  | 509.9  | 519.3  | 528.9  | 534.2  | 539.5  | 534.5  | 529.5  | 518.7  |
| 457.5  | 75°   | 449.5  | 441.1  | 449.5  | 457.5  | 465.4  | 468.0  | 470.7  | 465.4  | 460.2  | 450.4  |
| 388.4  | 77.5° | 380.4  | 373.7  | 380.4  | 388.4  | 396.5  | 400.2  | 403.8  | 399.0  | 394.1  | 383.8  |
| 314.5  | 80°   | 303.6  | 291.0  | 303.6  | 314.5  | 325.3  | 326.8  | 328.4  | 322.0  | 315.5  | 307.7  |
| 234.6  | 82.5° | 225.5  | 217.4  | 225.5  | 234.6  | 243.8  | 244.5  | 245.2  | 234.2  | 223.2  | 206.4  |
| 146.3  | 85°   | 139.2  | 131.9  | 139.2  | 146.3  | 153.4  | 154.6  | 155.7  | 142.1  | 128.5  | 112.8  |
| 61.0   | 87.5° | 57.3   | 53.8   | 57.3   | 61.0   | 64.7   | 66.1   | 67.5   | 62.0   | 56.5   | 49.9   |
| 0.0    | 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

REPORT NUMBER: P945995

CATALOG NUMBER: GLAN-SB1D-740-U-SLL

**CANDELA DISTRIBUTION (continued):**

| 270°   |       | 275°   | 280°   | 285°   | 290°   | 295°   | 300°   | 305°   | 310°   | 315°   | 320°   |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1475.6 | 0°    | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 |
| 1384.7 | 2.5°  | 1393.3 | 1401.9 | 1410.4 | 1419.0 | 1428.7 | 1438.5 | 1449.3 | 1460.2 | 1473.6 | 1485.7 |
| 1313.9 | 5°    | 1327.8 | 1341.5 | 1356.7 | 1371.9 | 1389.0 | 1406.2 | 1426.8 | 1447.3 | 1470.8 | 1494.6 |
| 1270.9 | 7.5°  | 1287.7 | 1304.6 | 1323.7 | 1342.8 | 1365.5 | 1388.1 | 1415.4 | 1442.7 | 1473.1 | 1505.5 |
| 1263.0 | 10°   | 1282.0 | 1300.9 | 1321.5 | 1342.1 | 1364.7 | 1387.4 | 1416.2 | 1444.9 | 1477.6 | 1517.6 |
| 1299.2 | 12.5° | 1318.8 | 1338.5 | 1354.5 | 1370.7 | 1385.7 | 1400.7 | 1424.2 | 1447.7 | 1478.2 | 1520.2 |
| 1374.8 | 15°   | 1391.9 | 1408.9 | 1413.1 | 1417.3 | 1415.2 | 1413.2 | 1424.4 | 1435.7 | 1460.0 | 1506.6 |
| 1455.2 | 17.5° | 1468.9 | 1482.7 | 1469.6 | 1456.5 | 1431.8 | 1407.1 | 1403.0 | 1398.9 | 1413.9 | 1468.7 |
| 1505.3 | 20°   | 1511.7 | 1518.1 | 1490.6 | 1463.1 | 1420.2 | 1377.4 | 1358.1 | 1338.9 | 1342.8 | 1406.6 |
| 1504.8 | 22.5° | 1501.0 | 1497.1 | 1461.4 | 1425.7 | 1376.6 | 1327.7 | 1299.2 | 1270.7 | 1263.0 | 1335.6 |
| 1454.9 | 25°   | 1441.9 | 1428.7 | 1393.6 | 1358.4 | 1314.3 | 1270.3 | 1237.5 | 1204.7 | 1183.7 | 1258.2 |
| 1368.3 | 27.5° | 1353.6 | 1339.0 | 1310.8 | 1282.6 | 1246.5 | 1210.3 | 1178.6 | 1146.9 | 1121.4 | 1189.2 |
| 1277.1 | 30°   | 1265.2 | 1253.4 | 1229.9 | 1206.5 | 1176.5 | 1146.5 | 1121.3 | 1096.1 | 1076.1 | 1133.0 |
| 1200.7 | 32.5° | 1187.4 | 1174.3 | 1151.8 | 1129.4 | 1105.3 | 1081.4 | 1066.5 | 1051.6 | 1042.7 | 1088.6 |
| 1130.5 | 35°   | 1114.6 | 1098.8 | 1076.5 | 1054.3 | 1036.1 | 1017.8 | 1013.7 | 1009.6 | 1013.3 | 1051.5 |
| 1066.2 | 37.5° | 1046.6 | 1027.0 | 1004.8 | 982.7  | 969.6  | 956.5  | 961.0  | 965.5  | 979.0  | 1012.4 |
| 1003.6 | 40°   | 981.1  | 958.5  | 937.1  | 915.7  | 906.3  | 896.8  | 907.0  | 917.3  | 938.0  | 968.3  |
| 943.6  | 42.5° | 919.3  | 894.9  | 874.6  | 854.3  | 846.6  | 838.9  | 852.5  | 866.1  | 892.1  | 920.0  |
| 890.7  | 45°   | 865.4  | 840.2  | 820.9  | 801.7  | 795.1  | 788.7  | 801.8  | 815.1  | 840.3  | 868.6  |
| 847.1  | 47.5° | 822.2  | 797.3  | 778.5  | 759.6  | 753.5  | 747.4  | 758.5  | 769.6  | 791.3  | 827.8  |
| 809.1  | 50°   | 786.8  | 764.5  | 746.8  | 729.0  | 719.5  | 709.9  | 719.7  | 729.6  | 754.8  | 802.8  |
| 783.1  | 52.5° | 762.3  | 741.5  | 725.2  | 708.9  | 694.7  | 680.3  | 690.0  | 699.8  | 735.0  | 790.2  |
| 765.3  | 55°   | 747.1  | 728.9  | 711.3  | 693.7  | 673.5  | 653.2  | 668.5  | 683.9  | 737.0  | 788.3  |
| 750.5  | 57.5° | 732.5  | 714.5  | 693.9  | 673.3  | 651.4  | 629.5  | 652.0  | 674.4  | 738.9  | 784.2  |
| 729.6  | 60°   | 711.2  | 693.0  | 669.3  | 645.6  | 626.5  | 607.3  | 636.4  | 665.4  | 732.7  | 762.6  |
| 701.0  | 62.5° | 681.5  | 661.9  | 634.3  | 606.7  | 594.5  | 582.4  | 618.7  | 655.0  | 717.4  | 721.1  |
| 661.6  | 65°   | 643.0  | 624.3  | 594.7  | 565.1  | 560.5  | 555.8  | 594.4  | 633.0  | 680.6  | 680.2  |
| 616.6  | 67.5° | 599.0  | 581.2  | 553.9  | 526.6  | 528.1  | 529.5  | 561.7  | 593.9  | 620.6  | 621.8  |
| 566.8  | 70°   | 551.5  | 536.2  | 512.2  | 488.2  | 493.3  | 498.4  | 521.3  | 544.2  | 552.9  | 552.9  |
| 507.9  | 72.5° | 494.1  | 480.3  | 461.4  | 442.5  | 449.9  | 457.4  | 473.1  | 488.8  | 488.7  | 483.1  |
| 440.5  | 75°   | 428.0  | 415.5  | 401.5  | 387.4  | 394.6  | 401.7  | 413.9  | 425.9  | 428.1  | 402.5  |
| 373.4  | 77.5° | 362.7  | 351.9  | 340.5  | 329.1  | 336.3  | 343.6  | 353.3  | 363.0  | 364.1  | 321.9  |
| 299.8  | 80°   | 290.8  | 281.7  | 272.2  | 262.7  | 268.8  | 274.9  | 283.1  | 291.2  | 291.3  | 240.9  |
| 189.7  | 82.5° | 192.9  | 196.0  | 196.8  | 197.6  | 201.9  | 206.2  | 210.2  | 214.1  | 211.8  | 168.7  |
| 97.1   | 85°   | 105.9  | 114.7  | 118.8  | 122.9  | 127.7  | 132.5  | 136.7  | 141.0  | 137.9  | 105.9  |
| 43.3   | 87.5° | 50.1   | 56.7   | 56.9   | 57.1   | 58.0   | 58.9   | 60.6   | 62.3   | 58.3   | 45.0   |
| 0.0    | 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

REPORT NUMBER: P945995

CATALOG NUMBER: GLAN-SB1D-740-U-SLL

**CANDELA DISTRIBUTION (continued):**

| 325°   |       | 330°   | 335°   | 340°   | 345°   | 350°   | 355°   | 360°   |
|--------|-------|--------|--------|--------|--------|--------|--------|--------|
| 1475.6 | 0°    | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 | 1475.6 |
| 1498.1 | 2.5°  | 1510.6 | 1523.6 | 1536.6 | 1549.6 | 1562.5 | 1574.7 | 1586.9 |
| 1519.8 | 5°    | 1545.0 | 1571.9 | 1598.9 | 1625.7 | 1652.6 | 1679.4 | 1706.3 |
| 1540.7 | 7.5°  | 1575.8 | 1615.7 | 1655.7 | 1696.7 | 1737.7 | 1782.0 | 1826.4 |
| 1559.3 | 10°   | 1600.9 | 1649.4 | 1697.9 | 1752.0 | 1806.2 | 1862.3 | 1918.4 |
| 1567.3 | 12.5° | 1614.3 | 1671.5 | 1728.7 | 1790.1 | 1851.5 | 1913.1 | 1974.7 |
| 1561.1 | 15°   | 1615.6 | 1681.4 | 1747.3 | 1813.9 | 1880.5 | 1944.7 | 2009.0 |
| 1534.2 | 17.5° | 1599.7 | 1676.2 | 1752.6 | 1825.3 | 1897.9 | 1963.1 | 2028.2 |
| 1487.8 | 20°   | 1569.0 | 1661.7 | 1754.3 | 1834.1 | 1914.0 | 1981.8 | 2049.5 |
| 1433.4 | 22.5° | 1531.2 | 1643.9 | 1756.6 | 1846.1 | 1935.7 | 2004.9 | 2074.1 |
| 1372.7 | 25°   | 1487.2 | 1626.3 | 1765.5 | 1867.9 | 1970.2 | 2038.0 | 2105.8 |
| 1317.1 | 27.5° | 1445.0 | 1614.6 | 1784.2 | 1901.9 | 2019.5 | 2084.2 | 2148.9 |
| 1270.7 | 30°   | 1408.3 | 1609.1 | 1809.8 | 1945.9 | 2081.9 | 2144.4 | 2206.9 |
| 1230.7 | 32.5° | 1372.7 | 1602.3 | 1831.9 | 1991.8 | 2151.7 | 2213.5 | 2275.4 |
| 1191.3 | 35°   | 1331.1 | 1589.5 | 1848.1 | 2044.1 | 2240.1 | 2299.4 | 2358.6 |
| 1145.0 | 37.5° | 1277.5 | 1567.6 | 1857.7 | 2102.7 | 2347.7 | 2423.3 | 2498.8 |
| 1089.7 | 40°   | 1211.2 | 1537.4 | 1863.8 | 2177.1 | 2490.4 | 2600.5 | 2710.6 |
| 1028.7 | 42.5° | 1137.5 | 1506.3 | 1875.3 | 2274.4 | 2673.6 | 2832.5 | 2991.4 |
| 964.0  | 45°   | 1059.3 | 1477.4 | 1895.5 | 2402.5 | 2909.6 | 3123.9 | 3338.2 |
| 912.7  | 47.5° | 997.6  | 1453.5 | 1909.3 | 2539.0 | 3168.6 | 3470.3 | 3772.0 |
| 878.7  | 50°   | 954.6  | 1427.4 | 1900.3 | 2665.6 | 3430.9 | 3885.7 | 4340.5 |
| 856.3  | 52.5° | 922.4  | 1383.4 | 1844.5 | 2747.8 | 3651.1 | 4322.1 | 4993.0 |
| 840.0  | 55°   | 891.7  | 1310.5 | 1729.3 | 2729.7 | 3730.1 | 4708.9 | 5687.8 |
| 820.8  | 57.5° | 857.3  | 1207.7 | 1558.0 | 2602.2 | 3646.4 | 4983.1 | 6319.7 |
| 791.3  | 60°   | 820.0  | 1074.1 | 1328.3 | 2364.9 | 3401.5 | 5051.6 | 6701.7 |
| 740.1  | 62.5° | 759.2  | 914.4  | 1069.5 | 2044.0 | 3018.5 | 4763.1 | 6507.7 |
| 689.2  | 65°   | 698.2  | 770.6  | 843.0  | 1716.6 | 2590.2 | 4354.9 | 6119.6 |
| 616.9  | 67.5° | 611.8  | 632.4  | 653.0  | 1395.9 | 2138.8 | 3869.1 | 5599.5 |
| 529.7  | 70°   | 506.3  | 500.5  | 494.6  | 1099.1 | 1703.5 | 3339.1 | 4974.6 |
| 450.1  | 72.5° | 417.0  | 399.3  | 381.5  | 840.2  | 1298.9 | 2764.5 | 4230.0 |
| 365.4  | 75°   | 328.4  | 312.3  | 296.3  | 609.8  | 923.4  | 2105.8 | 3288.1 |
| 285.9  | 77.5° | 250.0  | 239.0  | 228.1  | 413.2  | 598.4  | 1473.8 | 2349.3 |
| 210.5  | 80°   | 180.1  | 175.5  | 171.0  | 266.2  | 361.5  | 949.6  | 1537.6 |
| 146.3  | 82.5° | 123.9  | 123.0  | 122.2  | 163.8  | 205.4  | 549.6  | 893.8  |
| 89.5   | 85°   | 73.0   | 73.5   | 73.9   | 87.5   | 101.2  | 247.2  | 393.2  |
| 38.3   | 87.5° | 31.6   | 32.0   | 32.4   | 36.3   | 40.2   | 81.0   | 121.7  |
| 0.0    | 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

(END OF REPORT)