

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937904

Luminaire Tested: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937904
REPORT IS A COMBINATION OF REPORTS P933613 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12639.5 lumens
Efficiency: N/A
Efficacy: 132.8 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 95.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937904
CATALOG NUMBER: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

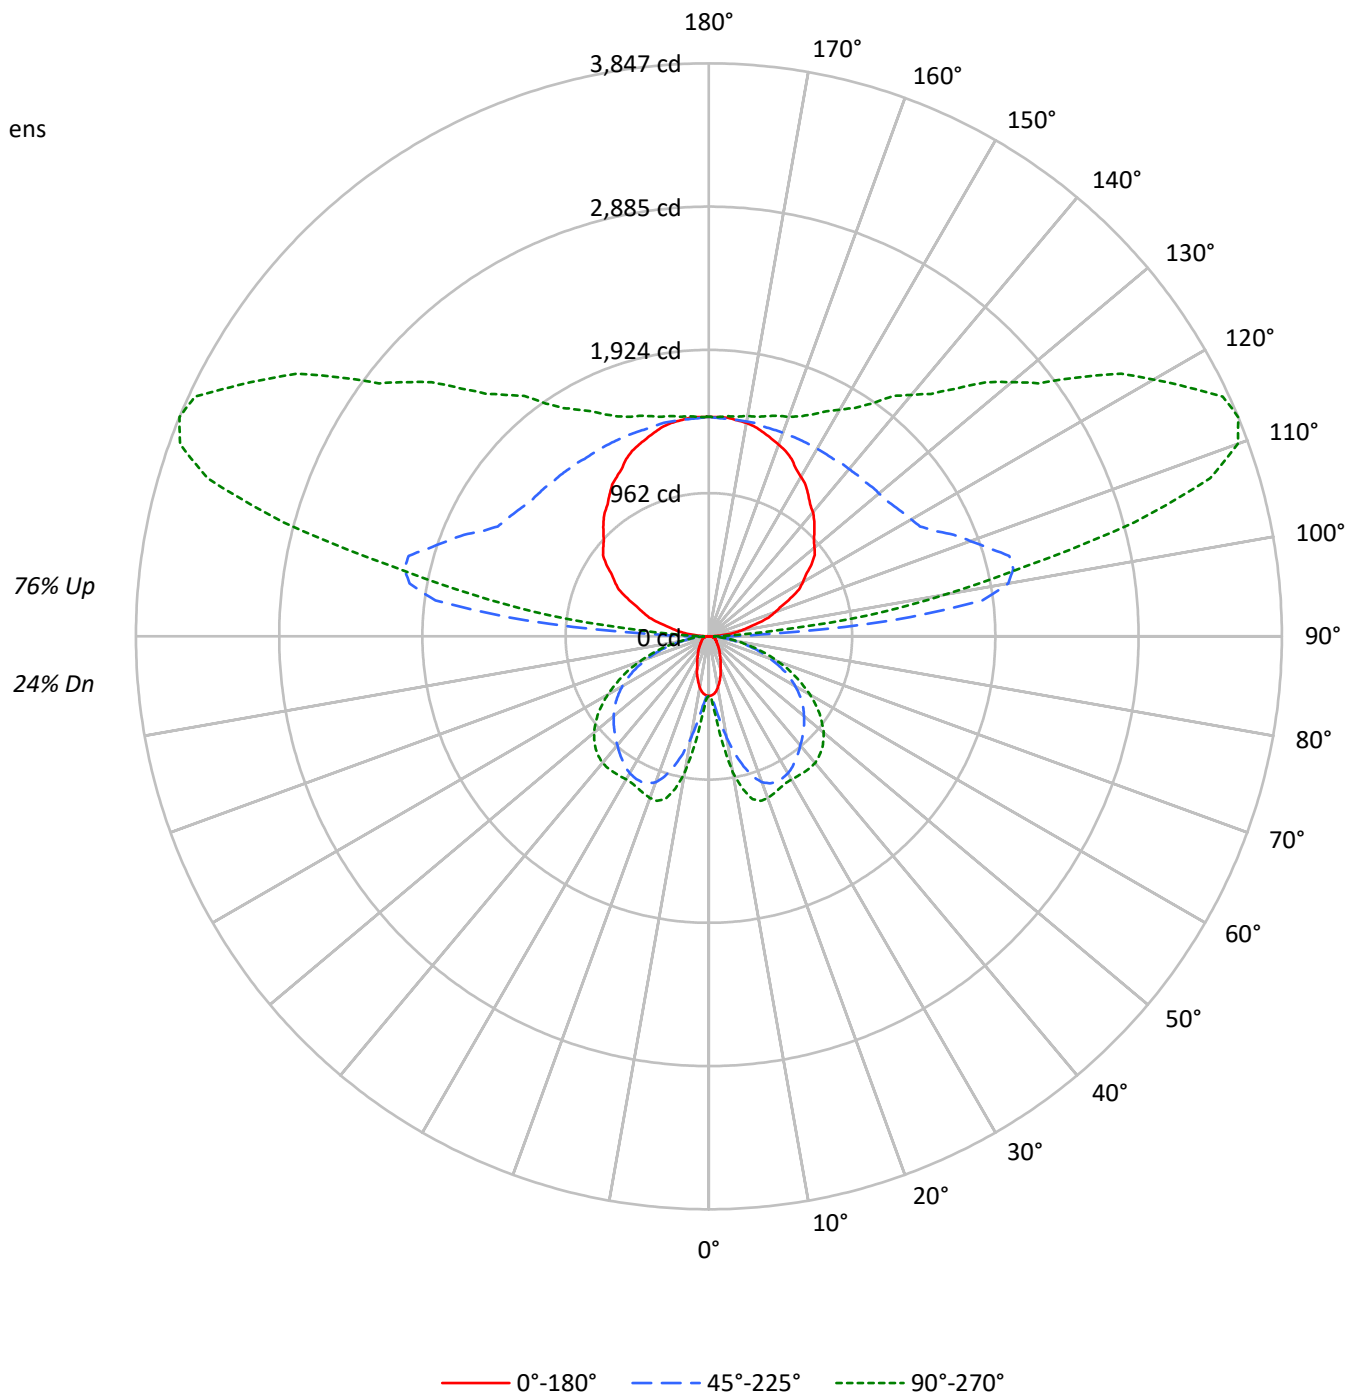



TEST NUMBER: P937904

CATALOG NUMBER: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33	24				24
1	92	88	84	80	81	78	75	72	60	58	56	44	42	41	28	28	27	20				20
2	83	76	70	65	74	68	63	58	52	49	46	38	36	34	25	23	22	16				16
3	76	66	59	54	67	59	53	48	46	42	38	33	30	28	21	20	19	13				13
4	69	58	51	45	61	52	46	41	40	36	32	29	26	24	19	17	16	11				11
5	63	52	44	38	56	46	39	34	36	31	27	26	23	20	17	15	13	10				10
6	58	46	38	33	51	41	34	29	32	27	23	23	20	17	15	13	12	8				8
7	53	41	34	28	47	37	30	26	29	24	20	21	18	15	14	12	10	7				7
8	49	37	30	25	44	33	27	22	26	21	18	19	16	13	12	10	9	6				6
9	46	34	27	22	40	30	24	20	24	19	16	17	14	12	11	9	8	6				6
10	42	31	24	19	38	28	21	17	22	17	14	16	13	10	10	9	7	5				5

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1848	1848	1848
5°	1806	2136	2484
10°	1638	3114	4119
15°	1392	4069	4973
20°	1133	4715	5069
25°	945	4933	4965
30°	797	4965	4956
35°	705	4882	5084
40°	614	4775	5217
45°	557	4696	5237
50°	510	4626	5151
55°	489	4522	4922
60°	500	4324	4562
65°	521	4022	4066
70°	555	3508	3436
75°	615	2860	2681
80°	671	1983	1806
85°	596	1053	925

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 5237 cd/sqm



TEST NUMBER: P937904

CATALOG NUMBER: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.5	0.4
10°-20°	228.4	1.8
20°-30°	399.5	3.2
30°-40°	514.2	4.1
40°-50°	574.4	4.5
50°-60°	550.2	4.4
60°-70°	436.0	3.4
70°-80°	256.4	2.0
80°-90°	76.8	0.6
90°-100°	718.3	5.7
100°-110°	1888.3	14.9
110°-120°	1958.0	15.5
120°-130°	1570.5	12.4
130°-140°	1232.3	9.7
140°-150°	945.9	7.5
150°-160°	681.2	5.4
160°-170°	416.8	3.3
170°-180°	140.8	1.1
0°-30°	679.4	5.4
0°-40°	1193.6	9.4
0°-60°	2318.2	18.3
0°-90°	3087.4	24.4
90°-120°	4564.6	36.1
90°-150°	8313.3	65.8
90°-180°	9552.0	75.6
0°-180°	12639.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	398	398	398	398	398	
5°	388	416	469	530	550	36
15°	291	537	904	1096	1131	81
25°	186	608	1077	1125	1126	86
35°	126	582	1014	1072	1114	78
45°	86	464	897	1027	1073	66
55°	62	295	761	884	908	56
65°	49	156	565	635	644	48
75°	36	96	310	341	342	38
85°	13	29	77	84	86	14
90°	10	28	75	38	38	9
95°	95	372	1237	638	434	105
105°	340	515	2088	3170	2957	361
115°	604	734	1672	3336	3807	597
125°	841	942	1521	2570	3032	746
135°	1002	1103	1474	2075	2353	775
145°	1162	1236	1455	1770	1909	728
155°	1313	1350	1455	1597	1644	603
165°	1417	1436	1455	1512	1531	400
175°	1474	1474	1465	1483	1483	140
180°	1474	1474	1474	1474	1474	



TEST NUMBER: P937904

CATALOG NUMBER: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3	398.3
2.5°	398.3	398.3	400.9	402.2	404.7	406.1	408.6	411.2	418.9	420.1	422.7
5°	388.1	393.3	409.9	416.3	434.2	458.6	468.8	485.4	520.1	530.3	536.7
7.5°	372.7	384.3	425.3	435.5	480.4	544.4	571.3	607.2	662.2	689.1	710.9
10°	348.4	372.7	445.8	470.1	543.1	640.4	690.5	740.4	823.6	860.7	874.9
12.5°	321.5	361.2	467.6	500.8	605.9	748.1	808.3	863.3	958.2	1008.1	1015.7
15°	290.8	344.6	488.0	536.7	672.5	837.7	904.4	972.2	1060.6	1096.4	1105.4
17.5°	263.9	331.8	507.3	558.5	723.7	918.4	986.3	1042.7	1114.4	1138.7	1145.1
20°	230.5	311.2	520.1	586.7	777.6	977.3	1042.7	1086.2	1134.9	1150.3	1152.9
22.5°	206.2	289.5	527.7	596.9	813.4	1013.3	1068.3	1102.9	1136.2	1141.3	1142.6
25°	185.7	265.1	526.5	608.4	844.1	1035.0	1077.2	1102.9	1122.1	1124.7	1124.7
27.5°	166.6	238.3	521.3	611.0	867.2	1040.1	1073.4	1091.4	1100.4	1105.4	1105.4
30°	149.8	212.7	508.5	605.9	877.5	1035.0	1061.9	1070.8	1079.8	1087.6	1091.4
32.5°	137.0	188.3	489.3	595.6	878.7	1022.1	1041.4	1046.5	1059.3	1077.2	1083.6
35°	125.5	164.0	467.6	581.5	871.1	1001.7	1014.5	1019.7	1045.2	1072.2	1081.1
37.5°	114.0	146.0	439.4	557.2	859.5	977.3	986.3	995.3	1035.0	1067.0	1077.2
40°	102.5	130.6	406.1	530.3	841.5	947.9	955.6	969.7	1022.1	1059.3	1069.6
42.5°	93.5	117.8	370.2	502.1	818.5	914.6	926.2	946.6	1006.9	1046.5	1058.0
45°	85.9	105.0	331.8	463.7	789.0	880.0	896.6	924.8	988.9	1027.3	1037.5
47.5°	78.1	96.1	292.0	424.0	757.0	845.5	867.2	899.2	964.6	1001.7	1010.7
50°	71.7	87.1	252.3	381.7	722.5	808.3	833.9	867.2	933.8	968.4	979.9
52.5°	66.6	79.5	215.2	339.4	682.7	769.8	799.3	833.9	896.6	930.0	937.6
55°	61.5	73.1	183.2	294.6	641.8	728.9	760.8	794.2	855.7	883.9	889.0
57.5°	58.9	67.9	156.2	252.3	598.2	682.7	718.6	749.4	807.0	828.7	833.9
60°	55.1	64.1	135.8	216.5	550.8	639.2	669.9	700.7	749.4	767.2	771.2
62.5°	51.3	61.5	120.4	181.9	502.1	588.0	618.6	646.9	687.9	700.7	705.8
65°	48.7	58.9	108.9	156.2	452.2	534.1	564.9	589.2	622.6	635.4	637.9
67.5°	46.1	56.3	99.9	134.5	402.2	480.4	503.4	526.5	552.1	564.9	566.1
70°	42.3	53.8	92.3	119.1	351.0	418.9	438.1	462.4	482.9	489.3	493.2
72.5°	39.7	49.9	87.1	107.6	298.4	359.9	377.9	391.9	409.9	416.3	416.3
75°	35.9	44.8	81.9	96.1	244.7	294.6	310.0	324.0	338.2	340.7	336.9
77.5°	32.0	39.7	70.5	80.7	190.9	233.1	245.9	253.6	265.1	267.7	269.0
80°	26.9	34.6	55.1	62.7	138.4	171.6	180.6	187.0	197.3	197.3	199.8
82.5°	20.5	26.9	39.7	44.8	93.5	117.8	125.5	129.4	135.8	135.8	135.8
85°	12.8	16.6	25.6	29.4	56.3	71.7	76.9	78.1	83.3	84.5	84.5
87.5°	6.4	9.0	16.6	18.0	29.4	37.1	37.1	39.7	39.7	38.4	37.1
90°	9.9	17.9	25.7	27.7	43.5	64.7	75.2	66.8	50.0	37.5	37.5
92.5°	39.5	106.8	174.1	190.9	268.4	371.6	423.3	370.9	266.3	187.8	180.4
95°	94.9	218.0	341.1	371.9	660.3	1044.9	1237.1	1104.0	837.6	637.8	615.2
97.5°	164.2	272.7	381.3	408.5	889.4	1530.7	1851.3	1767.1	1598.8	1472.5	1429.4
100°	217.5	316.0	414.5	439.1	972.8	1684.3	2040.2	2046.3	2058.6	2067.9	2016.6
102.5°	263.0	354.9	446.7	469.8	1011.1	1732.8	2093.6	2200.8	2415.3	2576.1	2532.2
105°	340.2	418.0	495.7	515.2	1039.3	1738.2	2087.6	2328.0	2808.8	3169.5	3145.9
107.5°	419.3	491.8	564.3	582.5	1044.6	1660.8	1968.9	2304.3	2975.0	3478.0	3483.7
110°	472.7	538.2	603.8	620.1	1036.7	1592.3	1870.1	2245.0	2994.8	3557.1	3581.7



TEST NUMBER: P937904

CATALOG NUMBER: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	525.2	587.5	650.0	665.5	1037.0	1532.4	1780.0	2163.7	2931.1	3506.7	3544.5
115°	604.2	661.8	719.3	733.7	1046.6	1463.7	1672.3	2041.9	2781.2	3335.6	3388.1
117.5°	682.3	734.7	786.9	800.0	1066.1	1420.8	1598.1	1931.7	2598.8	3099.3	3157.4
120°	727.8	777.1	826.3	838.6	1081.8	1406.2	1568.4	1873.2	2482.8	2940.1	2996.5
122.5°	772.3	822.0	871.6	884.0	1104.6	1398.6	1545.7	1820.1	2369.2	2780.9	2836.5
125°	840.6	885.9	931.1	942.4	1135.2	1392.4	1520.9	1754.1	2220.5	2570.2	2621.5
127.5°	896.0	941.7	987.4	998.8	1166.0	1388.8	1500.2	1700.4	2100.8	2401.1	2444.3
130°	925.6	974.9	1024.0	1036.4	1188.3	1391.0	1492.3	1670.5	2027.0	2294.3	2334.3
132.5°	956.2	1005.5	1054.7	1067.0	1206.5	1392.4	1485.3	1644.9	1964.0	2203.3	2239.1
135°	1001.8	1046.6	1091.5	1102.6	1226.2	1391.1	1473.5	1607.1	1874.3	2074.7	2105.6
137.5°	1048.2	1092.6	1137.0	1148.1	1255.9	1399.6	1471.5	1584.4	1810.4	1979.8	2005.1
140°	1086.8	1127.7	1168.5	1178.8	1274.1	1401.1	1464.6	1562.2	1757.3	1903.7	1927.3
142.5°	1116.5	1154.3	1192.0	1201.5	1289.2	1406.1	1464.6	1550.3	1721.7	1850.2	1870.6
145°	1161.9	1194.9	1227.9	1236.2	1309.0	1406.1	1454.7	1524.8	1665.0	1770.2	1785.6
147.5°	1207.5	1239.6	1271.7	1279.7	1338.1	1415.8	1454.7	1509.9	1620.2	1703.0	1715.7
150°	1237.1	1266.1	1295.2	1302.4	1353.1	1420.8	1454.7	1501.3	1594.5	1664.4	1674.7
152.5°	1267.8	1289.7	1311.7	1317.2	1363.1	1424.1	1454.7	1494.5	1574.0	1633.7	1641.5
155°	1313.3	1329.6	1345.8	1349.9	1384.8	1431.4	1454.7	1486.4	1549.7	1597.1	1602.3
157.5°	1346.9	1362.7	1378.5	1382.5	1406.5	1438.6	1454.7	1479.3	1528.5	1565.4	1569.1
160°	1369.7	1382.0	1394.3	1397.4	1416.5	1442.0	1454.7	1475.8	1518.0	1549.6	1551.7
162.5°	1392.4	1401.6	1410.8	1413.1	1427.0	1445.4	1454.7	1472.4	1508.0	1534.8	1536.8
165°	1417.1	1425.5	1433.8	1435.9	1442.1	1450.5	1454.7	1467.5	1493.0	1512.1	1514.2
167.5°	1439.9	1443.8	1447.8	1448.7	1454.0	1461.1	1464.6	1472.9	1489.6	1502.1	1503.0
170°	1454.7	1458.7	1462.7	1463.6	1463.9	1464.4	1464.6	1472.9	1489.6	1502.1	1502.1
172.5°	1462.6	1463.4	1464.4	1464.6	1464.6	1464.6	1464.6	1471.2	1484.4	1494.3	1493.5
175°	1473.5	1473.5	1473.5	1473.5	1470.5	1466.6	1464.6	1468.8	1477.1	1483.4	1483.4
177.5°	1473.5	1473.5	1473.5	1473.5	1471.2	1468.1	1466.6	1469.8	1476.4	1481.4	1480.5
180°	1473.5	1473.5	1473.5	1473.5	1473.5	1473.5	1473.5	1473.5	1473.5	1473.5	1473.5



TEST NUMBER: P937904

CATALOG NUMBER: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	398.3	398.3
2.5°	425.3	422.7
5°	546.9	549.5
7.5°	736.5	735.3
10°	915.8	927.4
12.5°	1046.5	1049.1
15°	1125.9	1131.1
17.5°	1156.7	1157.9
20°	1157.9	1155.4
22.5°	1143.9	1141.3
25°	1127.2	1125.9
27.5°	1111.8	1113.1
30°	1105.4	1109.3
32.5°	1105.4	1111.8
35°	1108.0	1114.4
37.5°	1106.7	1114.4
40°	1101.6	1110.6
42.5°	1087.6	1094.0
45°	1065.8	1073.4
47.5°	1037.5	1042.7
50°	1001.7	1006.9
52.5°	956.8	958.2
55°	903.0	908.2
57.5°	845.5	846.7
60°	781.4	785.2
62.5°	713.5	713.5
65°	641.8	644.3
67.5°	567.5	573.9
70°	491.9	493.2
72.5°	417.6	417.6
75°	340.7	342.0
77.5°	267.7	267.7
80°	198.5	199.8
82.5°	137.0	139.6
85°	85.9	85.9
87.5°	39.7	35.9
90°	37.5	37.5
92.5°	150.5	120.6
95°	524.7	434.1
97.5°	1257.2	1084.9
100°	1811.3	1606.0
102.5°	2356.4	2180.6
105°	3051.3	2956.9
107.5°	3506.6	3529.4
110°	3680.2	3778.6



TEST NUMBER: P937904

CATALOG NUMBER: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	3695.7	3846.8
115°	3597.7	3807.3
117.5°	3389.9	3622.4
120°	3222.5	3448.3
122.5°	3059.4	3282.2
125°	2826.8	3032.0
127.5°	2617.6	2790.7
130°	2494.3	2654.2
132.5°	2382.4	2525.7
135°	2229.2	2352.6
137.5°	2106.2	2207.3
140°	2021.8	2116.3
142.5°	1951.8	2033.2
145°	1847.1	1908.6
147.5°	1766.7	1817.7
150°	1716.0	1757.3
152.5°	1672.7	1703.9
155°	1622.9	1643.6
157.5°	1583.6	1598.1
160°	1560.0	1568.4
162.5°	1544.7	1552.6
165°	1522.5	1530.9
167.5°	1506.5	1510.0
170°	1502.1	1502.1
172.5°	1490.4	1487.3
175°	1483.4	1483.4
177.5°	1477.0	1473.5
180°	1473.5	1473.5



TEST NUMBER: P937904
 CATALOG NUMBER: SQ4-FB-125U-050D-B40-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.12	0.81	1.27	1.95	3.54	13.30	13.99	14.45	15.13	16.72
	3H	0.81	1.43	1.97	2.58	4.18	15.13	15.75	16.28	16.89	18.50
	4H	1.10	1.69	2.27	2.83	4.45	15.77	16.35	16.93	17.50	19.11
	6H	1.35	1.88	2.51	3.03	4.66	16.19	16.73	17.36	17.87	19.50
	8H	1.41	1.92	2.58	3.08	4.70	16.30	16.82	17.48	17.98	19.60
	12H	1.42	1.91	2.60	3.06	4.70	16.37	16.85	17.54	18.01	19.65
4H	2H	7.32	7.90	8.49	9.05	10.66	13.56	14.14	14.73	15.29	16.90
	3H	8.87	9.36	10.04	10.53	12.15	15.59	16.07	16.76	17.25	18.87
	4H	8.96	9.41	10.13	10.57	12.21	16.34	16.80	17.52	17.95	19.60
	6H	8.96	9.34	10.14	10.52	12.16	16.87	17.26	18.05	18.44	20.07
	8H	8.93	9.29	10.11	10.46	12.11	17.03	17.39	18.21	18.56	20.21
	12H	8.88	9.20	10.07	10.39	12.04	17.11	17.44	18.31	18.63	20.28
8H	4H	10.39	10.75	11.57	11.92	13.57	16.39	16.75	17.57	17.92	19.57
	6H	10.62	10.92	11.82	12.13	13.78	17.01	17.31	18.21	18.52	20.17
	8H	10.64	10.89	11.84	12.09	13.75	17.23	17.49	18.43	18.68	20.35
	12H	10.59	10.82	11.80	12.01	13.71	17.36	17.59	18.57	18.78	20.48
12H	4H	10.52	10.85	11.72	12.03	13.69	16.33	16.66	17.53	17.84	19.50
	6H	10.88	11.14	12.08	12.33	14.00	16.99	17.25	18.20	18.44	20.11
	8H	10.94	11.16	12.15	12.36	14.05	17.21	17.44	18.42	18.63	20.33