

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365925

Luminaire Tested: **FLD6BX10D010-FEU6B12-8035-F6LBXVM1-WMH-BTR84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365925
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-WMH-BTR84
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 1000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 816.0 lumens
Efficiency: N/A
Efficacy: 81.6 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365925

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-WMH-BTR84

Luminous Intensity Polar Plot

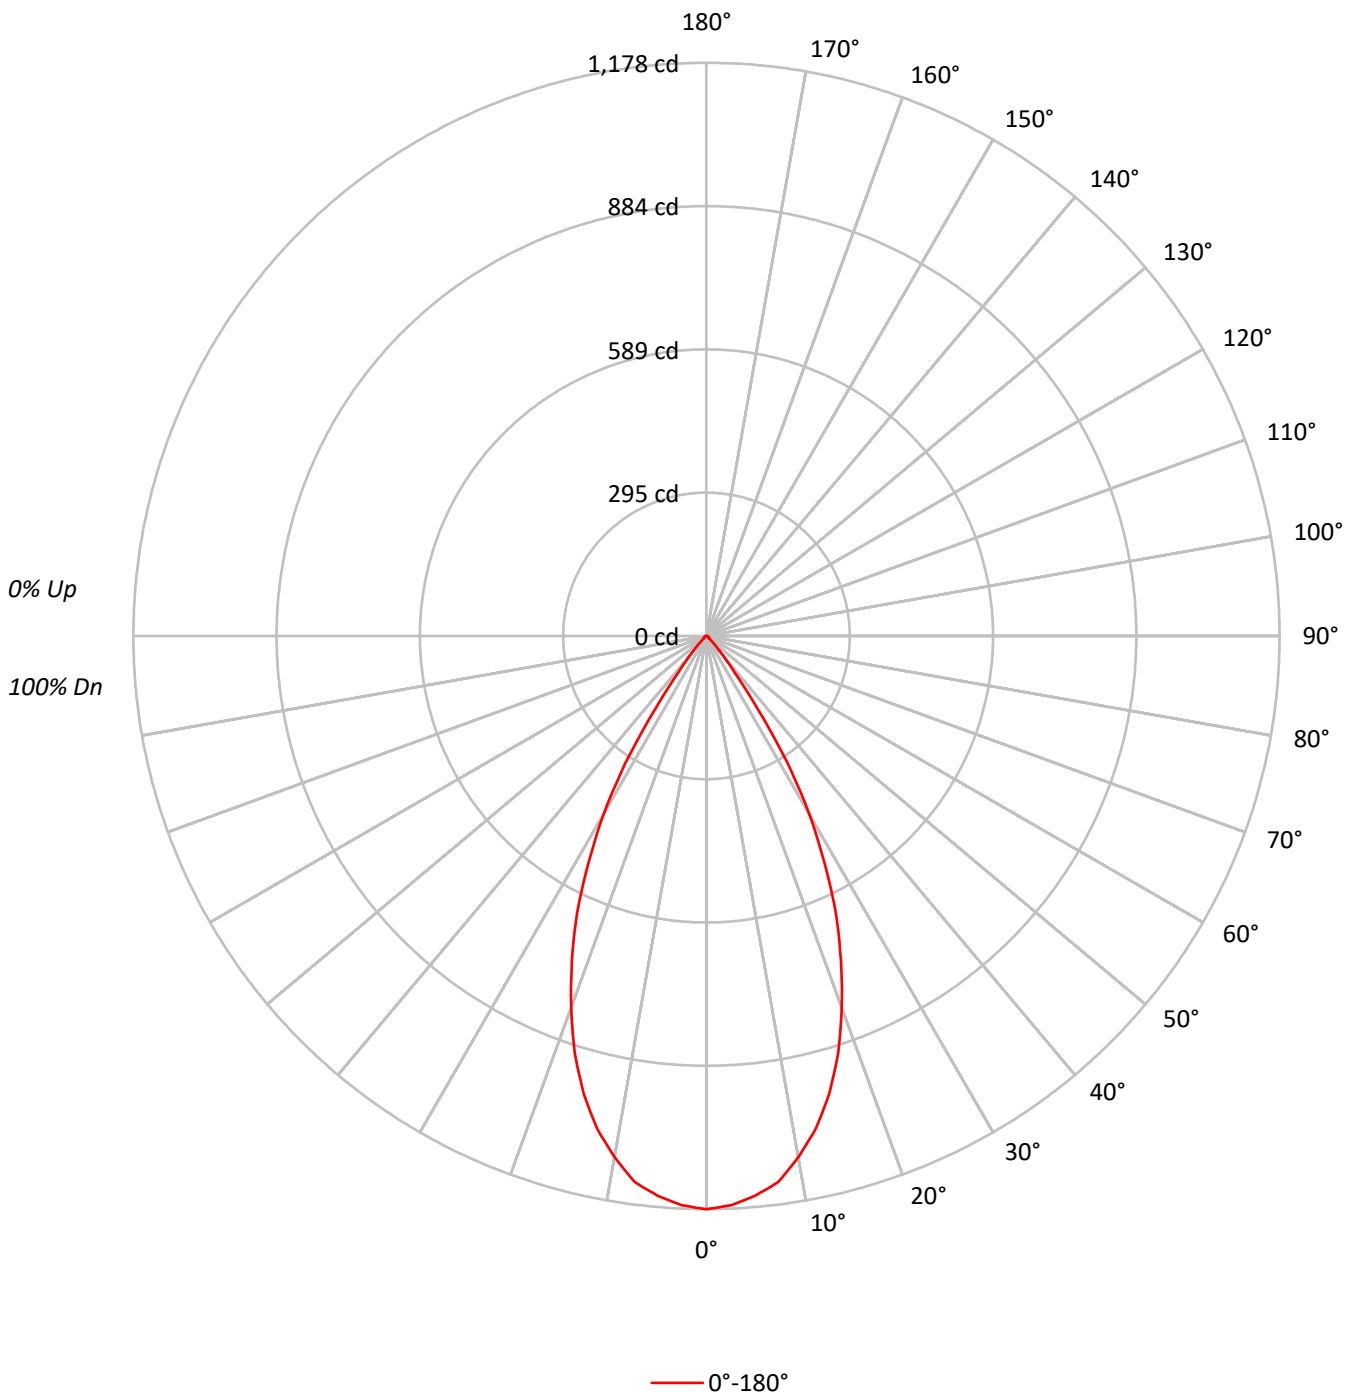



TEST NUMBER: P365925

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-WMH-BTR84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87		91	88	86		89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76		82	79	76		81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72		78	74	71		77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68		75	70	67		73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64		71	67	64		70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60		68	63	60		67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57		65	60	57		64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	84368
5°	82980
10°	79061
15°	72245
20°	61956
25°	49709
30°	34857
35°	16101
40°	5169
45°	1671
50°	780
55°	687
60°	687
65°	627
70°	607
75°	719
80°	907
85°	1479



TEST NUMBER: P365925

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-WMH-BTR84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.3	13.3
10°-20°	269.7	33.1
20°-30°	283.2	34.7
30°-40°	125.7	15.4
40°-50°	16.2	2.0
50°-60°	5.1	0.6
60°-70°	3.6	0.4
70°-80°	2.6	0.3
80°-90°	1.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	661.2	81.0
0°-40°	786.9	96.4
0°-60°	808.2	99.0
0°-90°	816.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	816.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1178	
5°	1154	108
15°	975	270
25°	629	283
35°	184	126
45°	16	16
55°	6	5
65°	4	4
75°	3	3
85°	2	2
90°	0	



TEST NUMBER: P365925

CATALOG NUMBER: FLD6BX10D010-FEU6B12-8035-F6LBXVM1-WMH-BTR84

CANDELA DISTRIBUTION (FULL):

	0°
0°	1178.3
2.5°	1170.9
5°	1154.5
7.5°	1132.1
10°	1087.4
12.5°	1037.3
15°	974.6
17.5°	899.5
20°	813.1
22.5°	722.3
25°	629.2
27.5°	524.9
30°	421.6
32.5°	309.9
35°	184.2
37.5°	98.2
40°	55.3
42.5°	30.4
45°	16.5
47.5°	8.4
50°	7.0
52.5°	6.2
55°	5.5
57.5°	5.1
60°	4.8
62.5°	4.0
65°	3.7
67.5°	2.9
70°	2.9
72.5°	2.6
75°	2.6
77.5°	2.2
80°	2.2
82.5°	1.8
85°	1.8
87.5°	1.1
90°	0.0

(END OF REPORT)