

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365997

Luminaire Tested: **FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365997
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR84
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1089.0 lumens
Efficiency: N/A
Efficacy: 76.7 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365997

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR84

Luminous Intensity Polar Plot

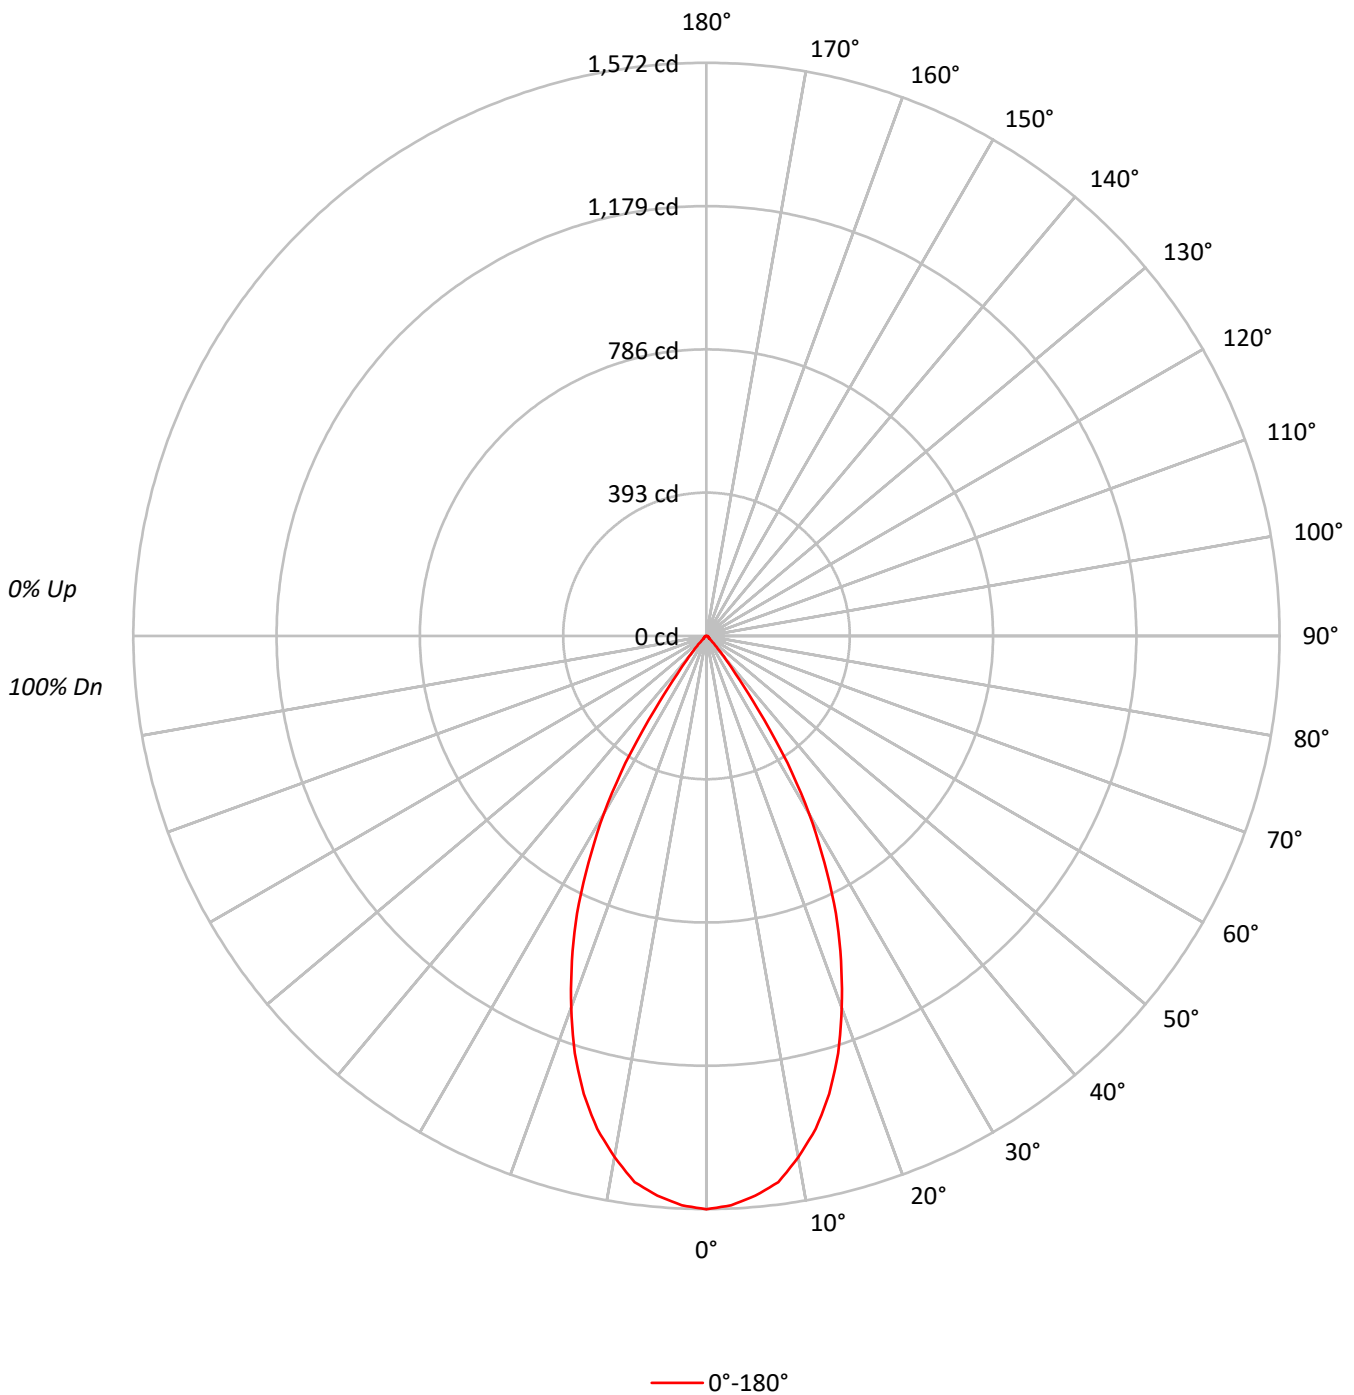



TEST NUMBER: P365997

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	112594
5°	110738
10°	105512
15°	96418
20°	82681
25°	66347
30°	46515
35°	21494
40°	6898
45°	2228
50°	1036
55°	911
60°	917
65°	830
70°	816
75°	941
80°	1196
85°	1972



TEST NUMBER: P365997

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.5	13.3
10°-20°	359.9	33.1
20°-30°	378.0	34.7
30°-40°	167.7	15.4
40°-50°	21.7	2.0
50°-60°	6.8	0.6
60°-70°	4.8	0.4
70°-80°	3.5	0.3
80°-90°	2.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	882.4	81.0
0°-40°	1050.2	96.4
0°-60°	1078.6	99.0
0°-90°	1089.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1089.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1572	
5°	1541	144
15°	1301	360
25°	840	378
35°	246	168
45°	22	22
55°	7	7
65°	5	5
75°	3	3
85°	2	2
90°	0	



TEST NUMBER: P365997

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8030-F6LBXVM1-WMH-BTR84

CANDELA DISTRIBUTION (FULL):

	0°
0°	1572.5
2.5°	1562.7
5°	1540.7
7.5°	1510.9
10°	1451.2
12.5°	1384.3
15°	1300.7
17.5°	1200.5
20°	1085.1
22.5°	963.9
25°	839.8
27.5°	700.4
30°	562.6
32.5°	413.5
35°	245.9
37.5°	131.0
40°	73.8
42.5°	40.6
45°	22.0
47.5°	11.2
50°	9.3
52.5°	8.3
55°	7.3
57.5°	6.8
60°	6.4
62.5°	5.4
65°	4.9
67.5°	3.9
70°	3.9
72.5°	3.4
75°	3.4
77.5°	2.9
80°	2.9
82.5°	2.4
85°	2.4
87.5°	1.5
90°	0.0

(END OF REPORT)