

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364570

Luminaire Tested: **FLD6BX15D010-FEU6B12-8035-F6LBXVM1-LI-BL89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364570
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-41)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-LI-BL89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,
BOTTOM LENS ACRYLIC, CLEAR 0.125", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1390.0 lumens
Efficiency: N/A
Efficacy: 97.9 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.82
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364570

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-LI-BL89BV

Luminous Intensity Polar Plot

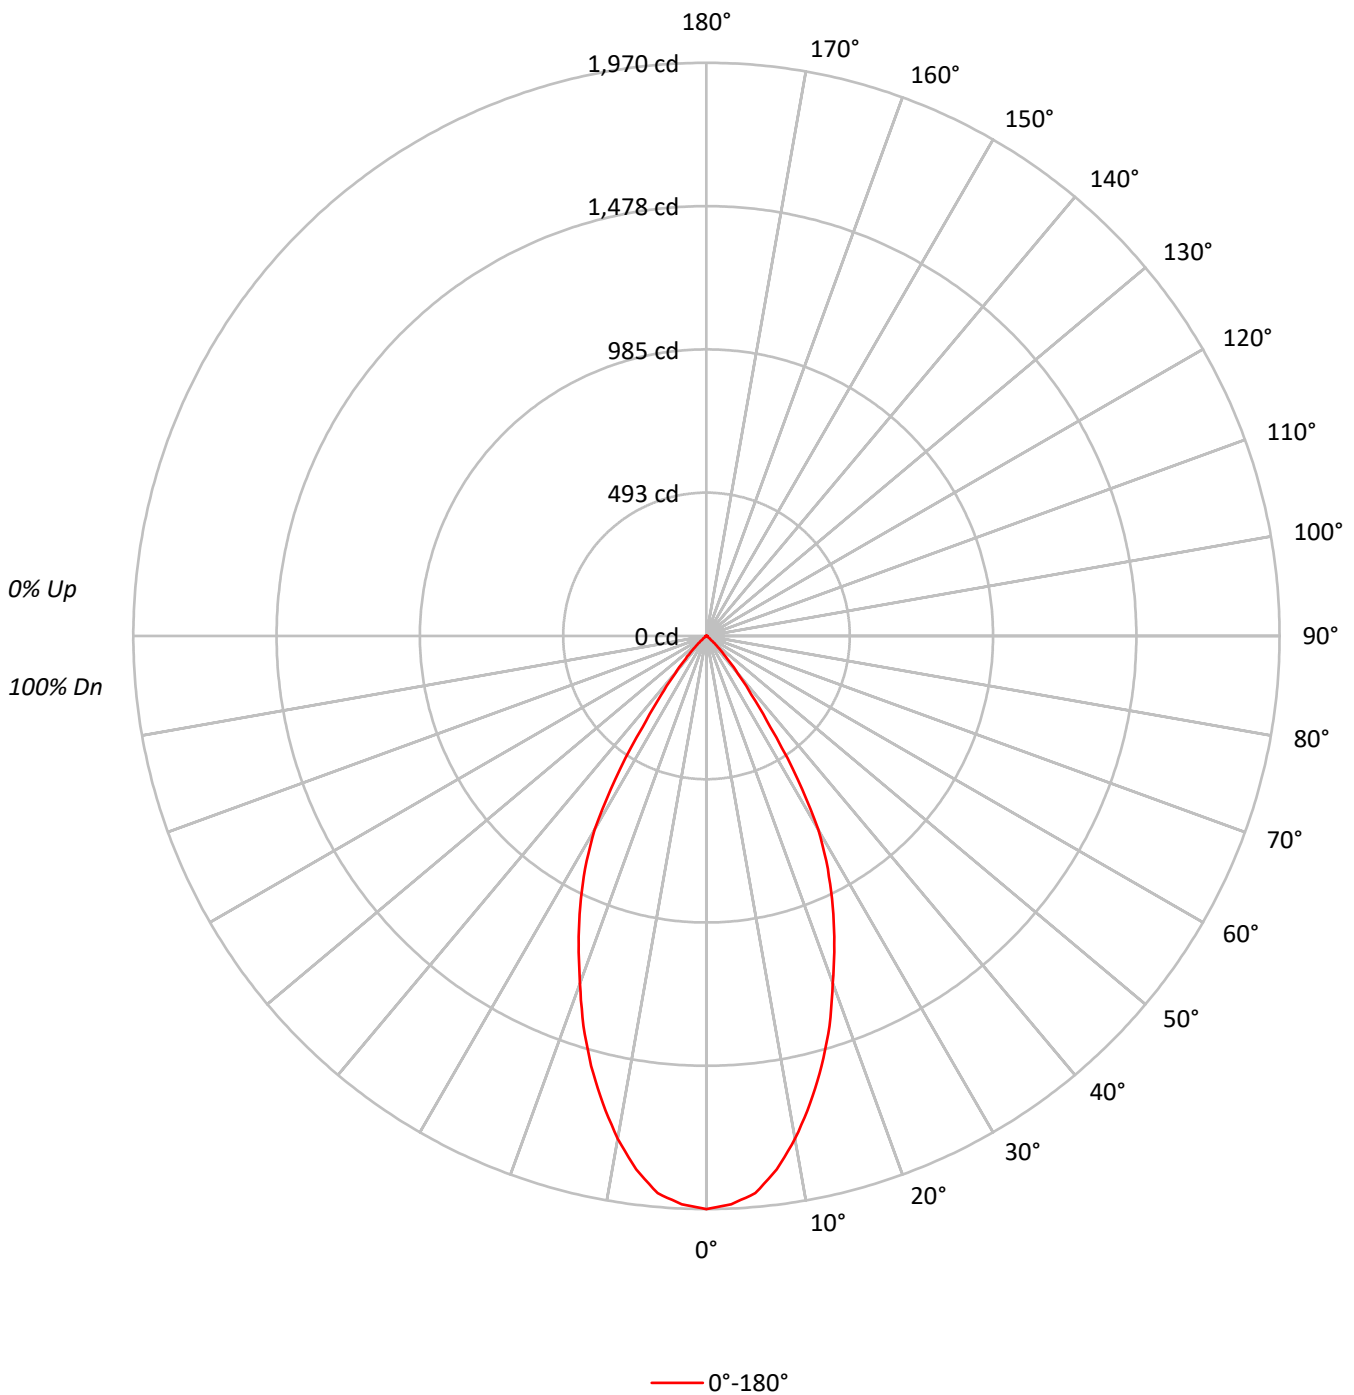



TEST NUMBER: P364570

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-LI-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87		91	88	85		89	86	84	83
4	99	91	86	82	97	90	85	82	88	84	81		86	83	80		84	81	79	77
5	94	86	81	76	92	85	80	76	83	79	75		82	78	75		80	77	74	73
6	90	81	75	71	88	80	75	71	79	74	71		77	73	70		76	73	70	68
7	85	77	71	67	84	76	71	67	75	70	66		74	69	66		72	69	66	64
8	82	73	67	63	80	72	67	63	71	66	63		70	65	62		69	65	62	61
9	78	69	63	59	77	68	63	59	67	62	59		66	62	59		66	62	59	57
10	74	65	60	56	74	65	60	56	64	59	56		63	59	56		63	59	56	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	53817
5°	52722
10°	48672
15°	43267
20°	36925
25°	30938
30°	24246
35°	12785
40°	5973
45°	2349
50°	616
55°	167
60°	109
65°	97
70°	80
75°	106
80°	79
85°	157



TEST NUMBER: P364570

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-LI-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	177.9	12.8
10°-20°	424.9	30.6
20°-30°	467.4	33.6
30°-40°	258.0	18.6
40°-50°	54.4	3.9
50°-60°	4.5	0.3
60°-70°	1.4	0.1
70°-80°	1.1	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1070.2	77.0
0°-40°	1328.2	95.6
0°-60°	1387.1	99.8
0°-90°	1390.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1390.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1970	
5°	1923	178
15°	1530	425
25°	1026	467
35°	383	258
45°	61	54
55°	4	4
65°	2	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P364570

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8035-F6LBXVM1-LI-BL89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	1970.2
2.5°	1955.2
5°	1922.8
7.5°	1849.5
10°	1754.8
12.5°	1646.1
15°	1530.0
17.5°	1405.4
20°	1270.3
22.5°	1147.6
25°	1026.5
27.5°	903.3
30°	768.7
32.5°	585.3
35°	383.4
37.5°	254.7
40°	167.5
42.5°	105.7
45°	60.8
47.5°	31.9
50°	14.5
52.5°	6.0
55°	3.5
57.5°	2.5
60°	2.0
62.5°	1.5
65°	1.5
67.5°	1.0
70°	1.0
72.5°	1.5
75°	1.0
77.5°	1.0
80°	0.5
82.5°	0.5
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)