

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364610

Luminaire Tested: **FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364610
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-26)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 1500LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1127.0 lumens
Efficiency: N/A
Efficacy: 79.4 lumens/watt
Spacing Criteria (0/90/45): 1.07 / 1.07 / 1.07
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 14.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364610

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR82

Luminous Intensity Polar Plot

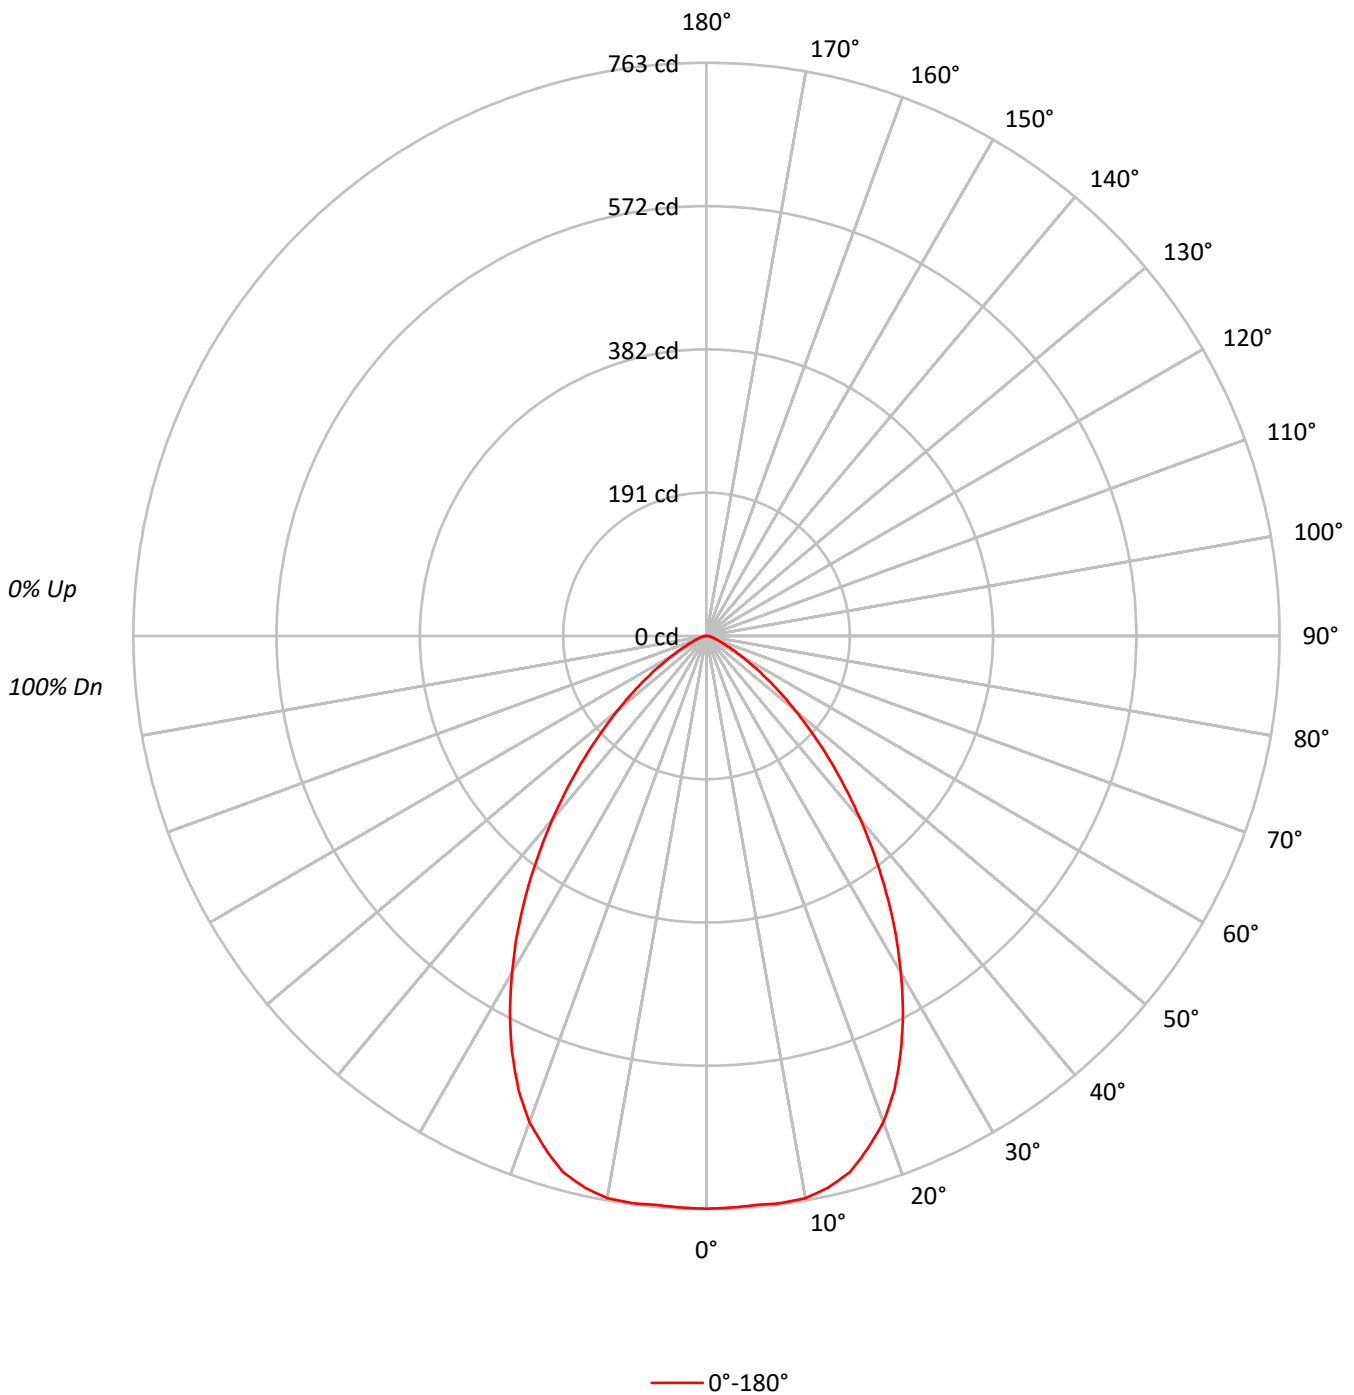



TEST NUMBER: P364610

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	90	84	79	96	89	83	79	86	81	77		84	80	76		81	78	75	73
4	92	83	76	71	90	81	75	70	79	74	69		77	72	69		75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63		71	66	62		69	65	61	60
6	81	70	63	57	79	69	62	57	67	61	57		66	60	56		64	60	56	54
7	76	65	57	52	74	64	57	52	62	56	52		61	56	52		60	55	51	50
8	71	60	53	48	70	59	53	48	58	52	48		57	51	47		56	51	47	46
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	43	42
10	63	52	45	41	62	52	45	41	51	45	41		50	44	40		49	44	40	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	54604
5°	54661
10°	55257
15°	54766
20°	52485
25°	48342
30°	42786
35°	36485
40°	29807
45°	23300
50°	17188
55°	11922
60°	7604
65°	4625
70°	3140
75°	2435
80°	2144
85°	2958



TEST NUMBER: P364610

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.6	6.4
10°-20°	206.6	18.3
20°-30°	279.5	24.8
30°-40°	260.0	23.1
40°-50°	178.1	15.8
50°-60°	87.8	7.8
60°-70°	29.3	2.6
70°-80°	9.7	0.9
80°-90°	3.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	558.7	49.6
0°-40°	818.7	72.6
0°-60°	1084.6	96.2
0°-90°	1127.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1127.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	763	
5°	760	73
15°	739	207
25°	612	279
35°	417	260
45°	230	178
55°	96	88
65°	27	29
75°	9	10
85°	4	3
90°	0	



TEST NUMBER: P364610

CATALOG NUMBER: FLD6BX15D010-FEU6B12-8050-F6LBXVM1-LI-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	762.6
2.5°	761.5
5°	760.5
7.5°	761.5
10°	760.0
12.5°	751.7
15°	738.8
17.5°	715.1
20°	688.8
22.5°	653.7
25°	611.9
27.5°	566.5
30°	517.5
32.5°	468.5
35°	417.4
37.5°	366.8
40°	318.9
42.5°	272.4
45°	230.1
47.5°	189.9
50°	154.3
52.5°	123.3
55°	95.5
57.5°	72.7
60°	53.1
62.5°	38.2
65°	27.3
67.5°	19.6
70°	15.0
72.5°	11.4
75°	8.8
77.5°	6.7
80°	5.2
82.5°	4.1
85°	3.6
87.5°	2.1
90°	0.0

(END OF REPORT)