

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364647

Luminaire Tested: **FLD6BX20D010-FEU6B12-8030-F6LBXVM1-LI-BTR84**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P364647  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX20D010-FEU6B12-8030-F6LBXVM1-LI-BTR84  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 2000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1521.0 lumens  
Efficiency: N/A  
Efficacy: 74.9 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P364647

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8030-F6LBXVM1-LI-BTR84

### Luminous Intensity Polar Plot

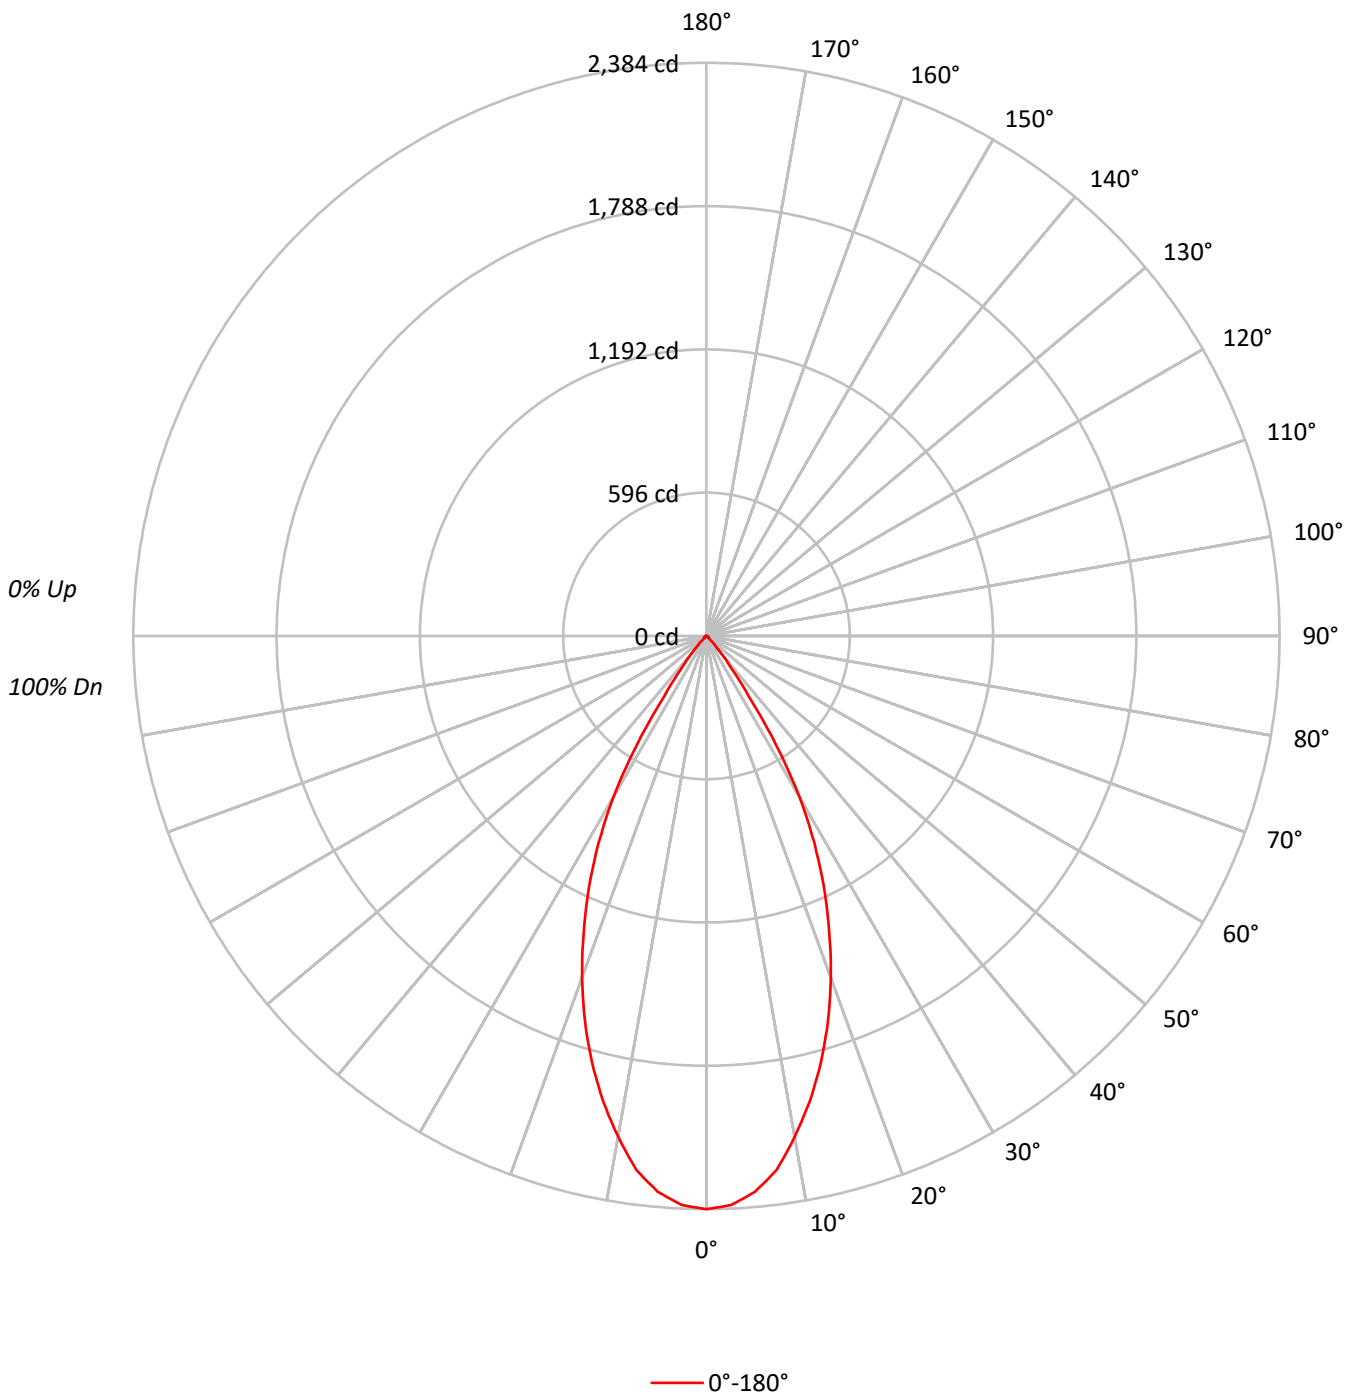



TEST NUMBER: P364647

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8030-F6LBXVM1-LI-BTR84

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	170713
5°	166823
10°	153796
15°	136217
20°	115324
25°	91368
30°	64208
35°	26739
40°	9179
45°	2450
50°	1348
55°	1261
60°	1160
65°	1135
70°	1130
75°	1300
80°	1649
85°	2793



TEST NUMBER: P364647

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8030-F6LBXVM1-LI-BTR84

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	215.1	14.1
10°-20°	509.8	33.5
20°-30°	523.3	34.4
30°-40°	221.6	14.6
40°-50°	27.3	1.8
50°-60°	9.0	0.6
60°-70°	6.7	0.4
70°-80°	5.2	0.3
80°-90°	3.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1248.2	82.1
0°-40°	1469.8	96.6
0°-60°	1506.1	99.0
0°-90°	1521.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1521.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2384	
5°	2321	215
15°	1838	510
25°	1156	523
35°	306	222
45°	24	27
55°	10	9
65°	7	7
75°	5	5
85°	3	3
90°	0	



TEST NUMBER: P364647

CATALOG NUMBER: FLD6BX20D010-FEU6B12-8030-F6LBXVM1-LI-BTR84

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2384.2
2.5°	2368.7
5°	2321.0
7.5°	2239.0
10°	2115.3
12.5°	1983.5
15°	1837.6
17.5°	1680.9
20°	1513.5
22.5°	1335.3
25°	1156.5
27.5°	971.6
30°	776.6
32.5°	547.3
35°	305.9
37.5°	175.5
40°	98.2
42.5°	51.8
45°	24.2
47.5°	14.1
50°	12.1
52.5°	10.8
55°	10.1
57.5°	9.4
60°	8.1
62.5°	7.4
65°	6.7
67.5°	6.1
70°	5.4
72.5°	5.4
75°	4.7
77.5°	4.7
80°	4.0
82.5°	4.0
85°	3.4
87.5°	2.0
90°	0.0

(END OF REPORT)