

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366203

Luminaire Tested: **FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BL84**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P366203  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BL84  
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.125", 3000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2649.0 lumens  
Efficiency: N/A  
Efficacy: 98.1 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
CIE Type: Direct


Input Watts (W): 27  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P366203

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BL84

### Luminous Intensity Polar Plot

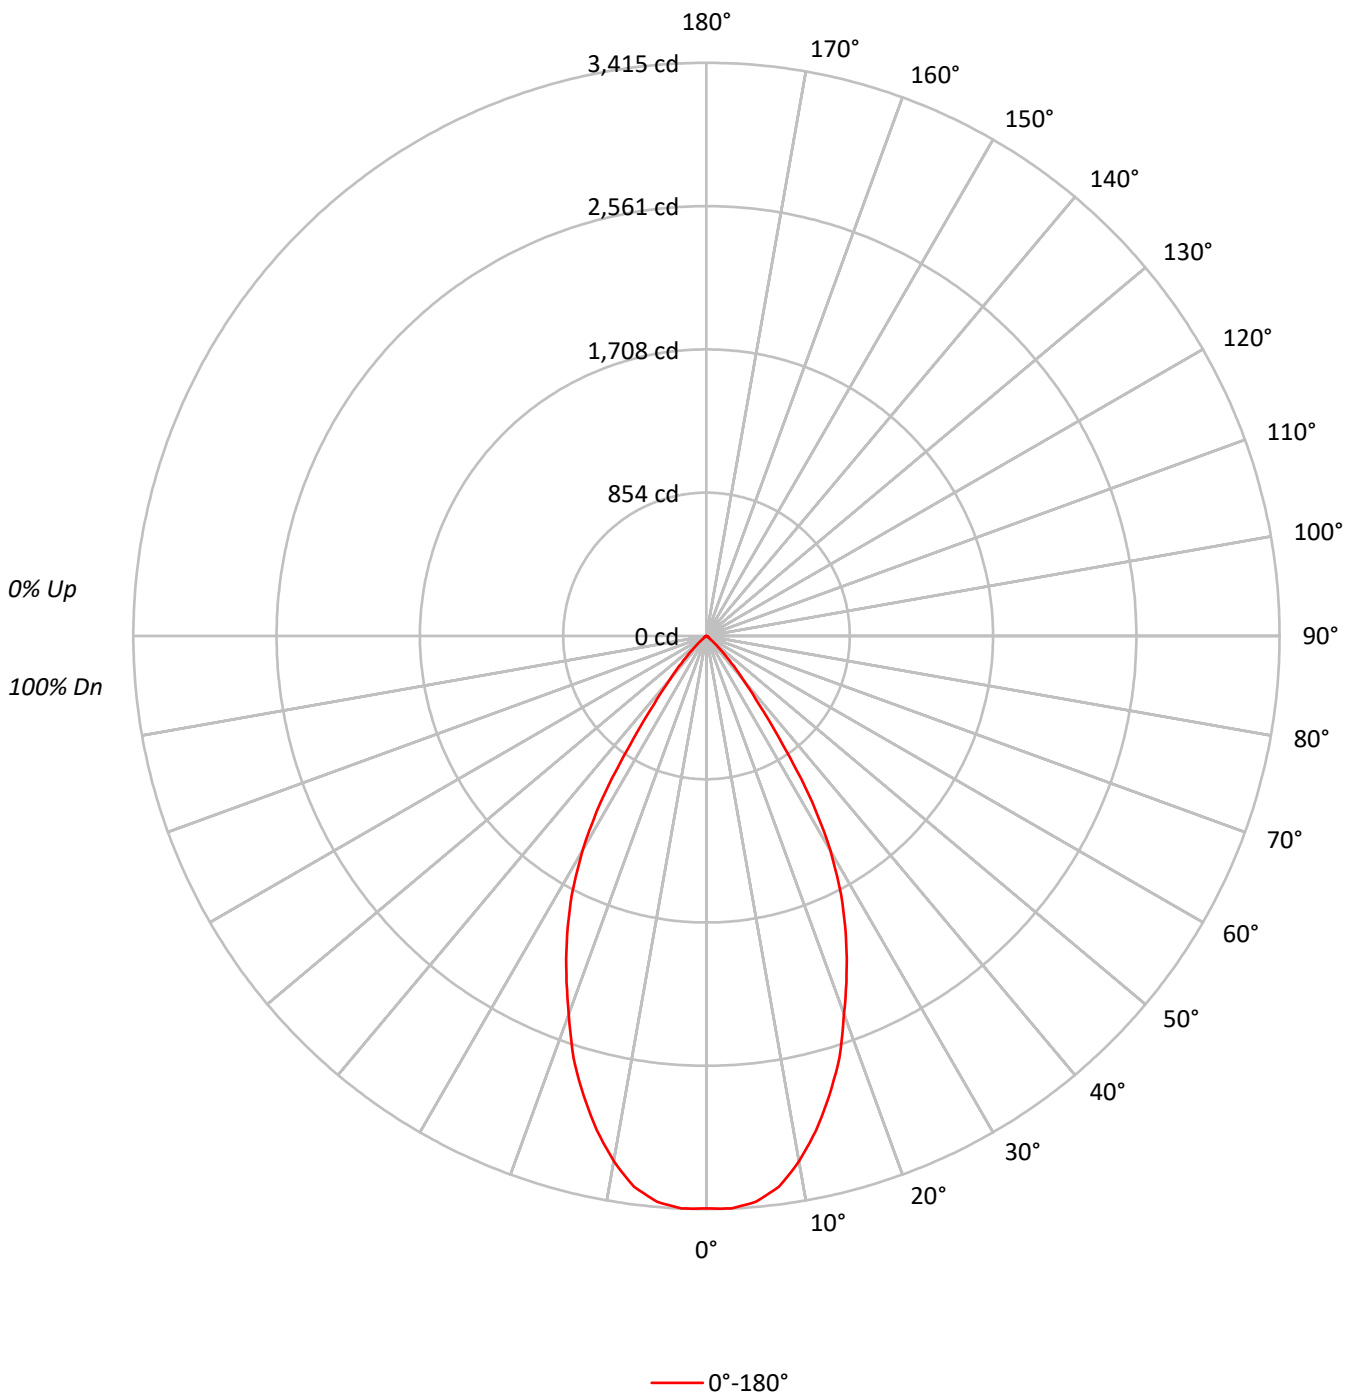



TEST NUMBER: P366203

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BL84

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86	91	88	85	88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80	86	82	79	84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75	81	77	74	80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70	77	73	69	76	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65	73	68	65	72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62	69	65	61	68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58	66	61	58	65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55	62	58	55	62	58	55	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	93189
5°	92799
10°	88153
15°	80074
20°	69677
25°	59238
30°	46599
35°	26587
40°	11963
45°	5037
50°	1589
55°	481
60°	333
65°	259
70°	240
75°	317
80°	157
85°	313



TEST NUMBER: P366203

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BL84

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	316.6	12.0
10°-20°	787.7	29.7
20°-30°	892.5	33.7
30°-40°	517.4	19.5
40°-50°	114.8	4.3
50°-60°	12.6	0.5
60°-70°	4.1	0.2
70°-80°	2.6	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1996.8	75.4
0°-40°	2514.2	94.9
0°-60°	2641.6	99.7
0°-90°	2649.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2649.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3412	
5°	3384	317
15°	2832	788
25°	1966	893
35°	797	517
45°	130	115
55°	10	13
65°	4	4
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P366203

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BL84

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3411.6
2.5°	3414.7
5°	3384.4
7.5°	3310.6
10°	3178.2
12.5°	3017.5
15°	2831.6
17.5°	2635.5
20°	2397.0
22.5°	2181.8
25°	1965.5
27.5°	1735.1
30°	1477.4
32.5°	1173.3
35°	797.3
37.5°	512.4
40°	335.5
42.5°	219.3
45°	130.4
47.5°	72.8
50°	37.4
52.5°	17.2
55°	10.1
57.5°	8.1
60°	6.1
62.5°	5.1
65°	4.0
67.5°	3.0
70°	3.0
72.5°	3.0
75°	3.0
77.5°	2.0
80°	1.0
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)