

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366213

Luminaire Tested: **FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BTR84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366213
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BTR84
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2251.1 lumens
Efficiency: N/A
Efficacy: 83.4 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366213

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BTR84

Luminous Intensity Polar Plot

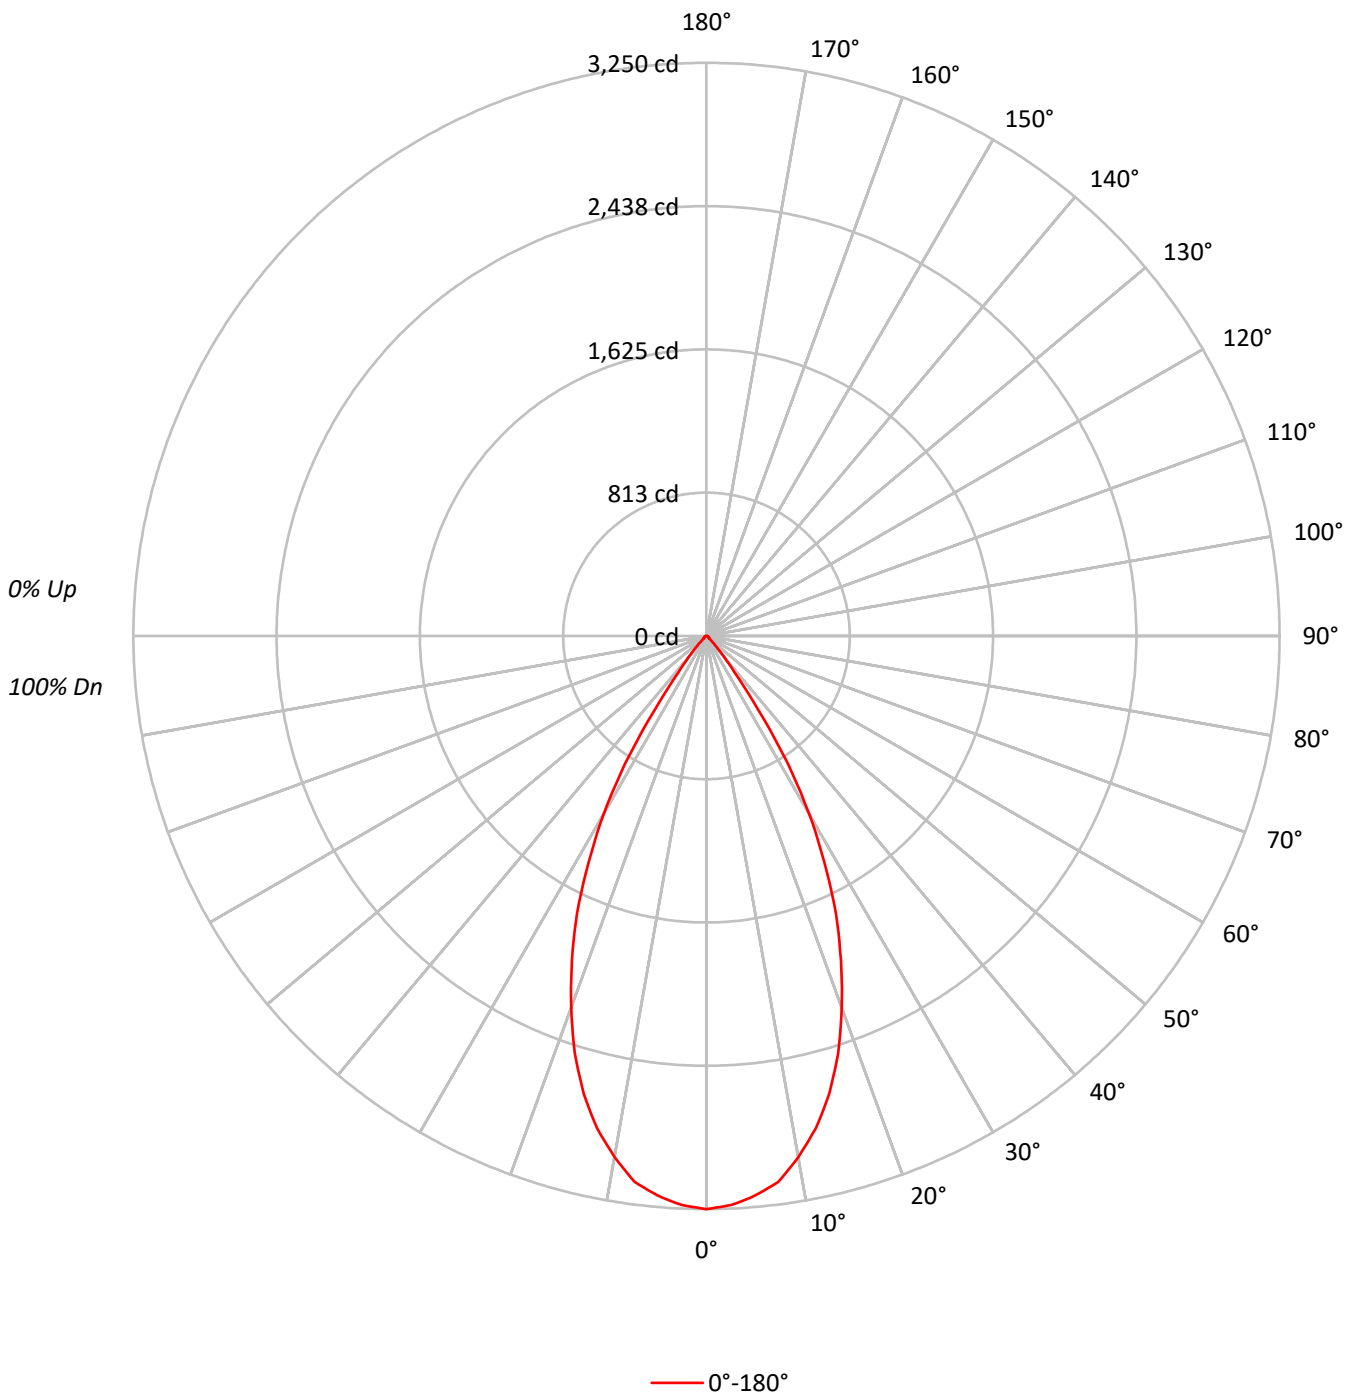



TEST NUMBER: P366213

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BTR84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87		91	88	86		89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76		82	79	76		81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72		78	74	71		77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68		75	70	67		73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64		71	67	64		70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60		68	63	60		67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57		65	60	57		64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	232728
5°	228901
10°	218105
15°	199300
20°	170910
25°	137135
30°	96147
35°	44422
40°	14263
45°	4607
50°	2139
55°	1897
60°	1876
65°	1711
70°	1696
75°	1964
80°	2515
85°	4190



TEST NUMBER: P366213

CATALOG NUMBER: FLD6BX30D010-FEUGB35-8040-F6LBXVM1-WMH-BTR84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	298.7	13.3
10°-20°	744.0	33.1
20°-30°	781.3	34.7
30°-40°	346.7	15.4
40°-50°	44.8	2.0
50°-60°	14.0	0.6
60°-70°	9.9	0.4
70°-80°	7.2	0.3
80°-90°	4.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1824.0	81.0
0°-40°	2170.7	96.4
0°-60°	2229.5	99.0
0°-90°	2251.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2251.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3250	
5°	3185	299
15°	2689	744
25°	1736	781
35°	508	347
45°	46	45
55°	15	14
65°	10	10
75°	7	7
85°	5	4
90°	0	



TEST NUMBER: P366213

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-WMH-BTR84

CANDELA DISTRIBUTION (FULL):

0°	
0°	3250.3
2.5°	3230.1
5°	3184.7
7.5°	3123.0
10°	2999.8
12.5°	2861.3
15°	2688.6
17.5°	2481.4
20°	2243.0
22.5°	1992.4
25°	1735.8
27.5°	1447.8
30°	1162.9
32.5°	854.8
35°	508.2
37.5°	270.8
40°	152.6
42.5°	83.9
45°	45.5
47.5°	23.2
50°	19.2
52.5°	17.2
55°	15.2
57.5°	14.1
60°	13.1
62.5°	11.1
65°	10.1
67.5°	8.1
70°	8.1
72.5°	7.1
75°	7.1
77.5°	6.1
80°	6.1
82.5°	5.1
85°	5.1
87.5°	3.0
90°	0.0

(END OF REPORT)