

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364783

Luminaire Tested: **FLD6BX30D010-FEU6B35-8050-F6LBXVM1-LI-BL86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364783
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-43)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8050-F6LBXVM1-LI-BL86
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,
BOTTOM LENS POLYCARBONATE, CLEAR 0.250", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2702.0 lumens
Efficiency: N/A
Efficacy: 100.1 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.82
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364783

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8050-F6LBXVM1-LI-BL86

Luminous Intensity Polar Plot

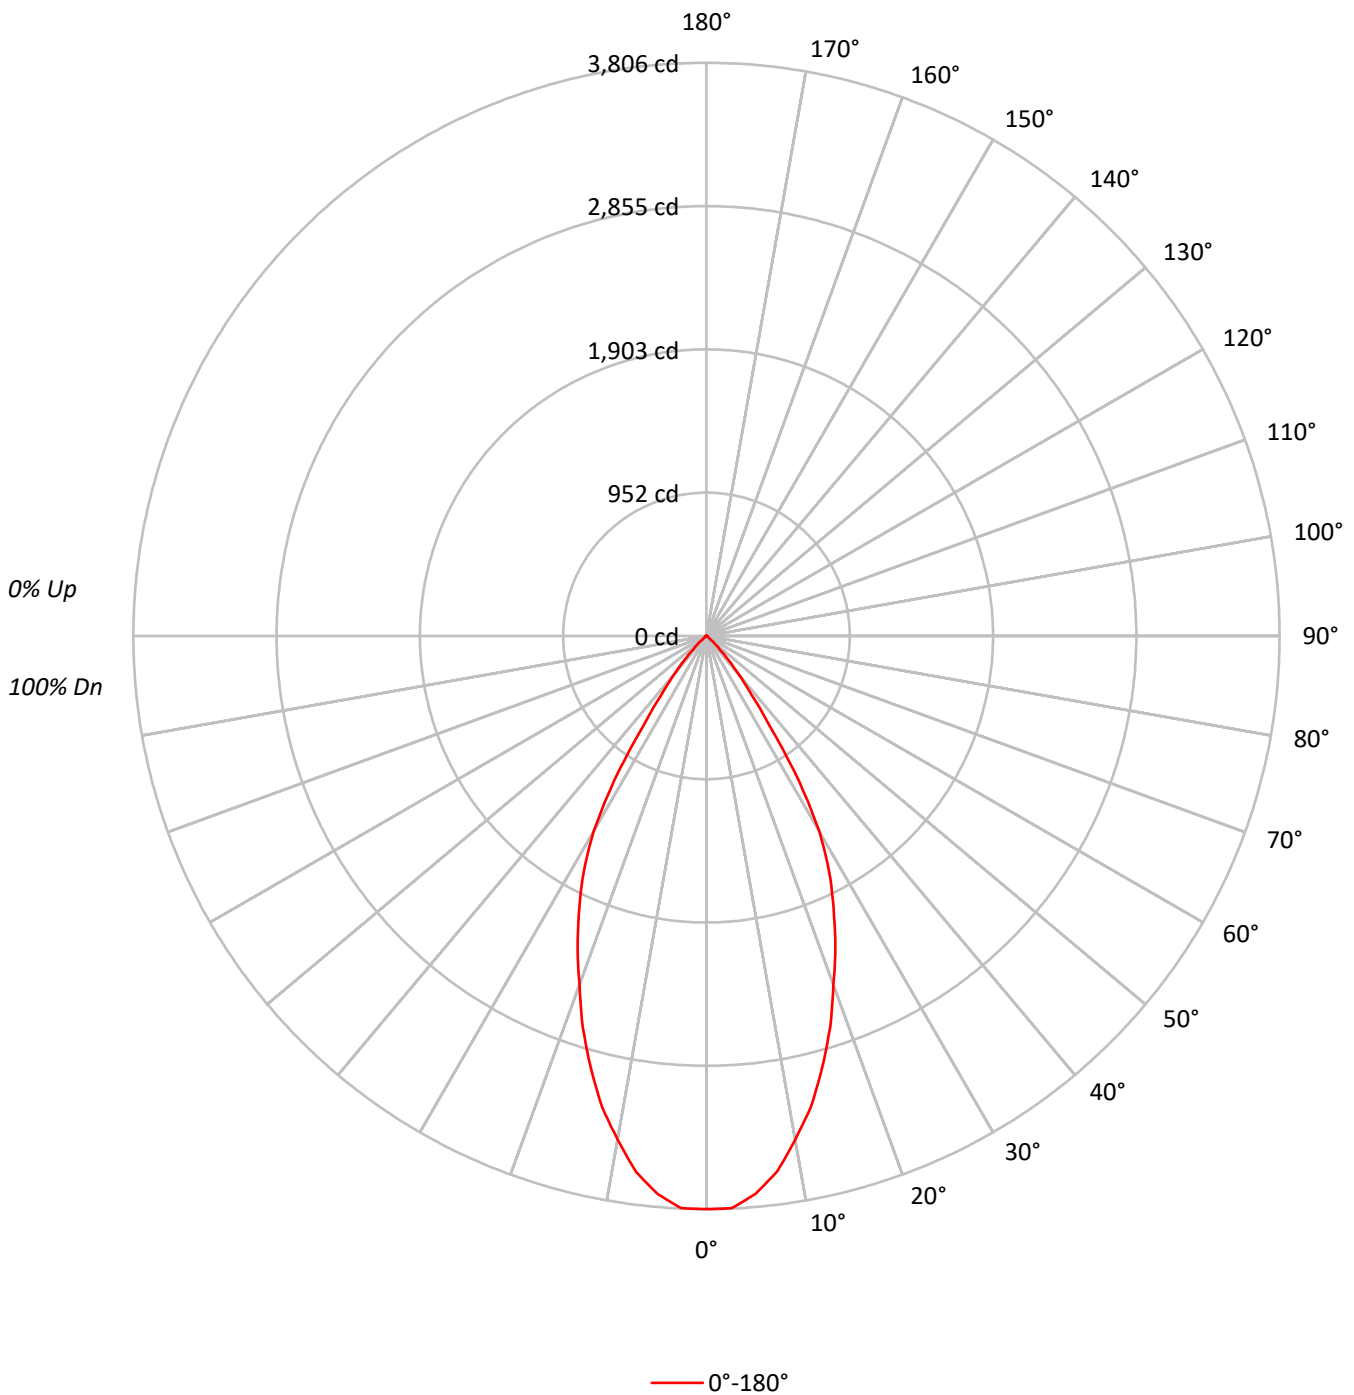



TEST NUMBER: P364783

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8050-F6LBXVM1-LI-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87		91	88	85		89	86	84	83
4	99	91	86	82	97	90	85	82	88	84	81		86	83	80		84	81	79	77
5	94	86	80	76	92	85	80	76	83	79	75		82	78	75		80	77	74	73
6	90	81	75	71	88	80	75	71	79	74	71		77	73	70		76	73	70	68
7	85	77	71	67	84	76	71	67	75	70	66		74	69	66		72	69	66	64
8	82	72	67	63	80	72	67	63	71	66	63		70	65	62		69	65	62	61
9	78	69	63	59	77	68	63	59	67	62	59		66	62	59		66	62	59	57
10	74	65	60	56	74	65	60	56	64	59	56		63	59	56		63	58	56	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	103956
5°	101982
10°	94177
15°	83923
20°	71671
25°	60191
30°	47252
35°	24486
40°	11692
45°	4605
50°	1211
55°	338
60°	224
65°	200
70°	160
75°	211
80°	157
85°	313



TEST NUMBER: P364783

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8050-F6LBXVM1-LI-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	344.9	12.8
10°-20°	824.8	30.5
20°-30°	910.6	33.7
30°-40°	501.1	18.5
40°-50°	105.9	3.9
50°-60°	9.0	0.3
60°-70°	2.8	0.1
70°-80°	2.0	0.1
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2080.3	77.0
0°-40°	2581.4	95.5
0°-60°	2696.3	99.8
0°-90°	2702.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2702.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3806	
5°	3719	345
15°	2968	825
25°	1997	911
35°	734	501
45°	119	106
55°	7	9
65°	3	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P364783

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8050-F6LBXVM1-LI-BL86

CANDELA DISTRIBUTION (FULL):

	0°
0°	3805.8
2.5°	3803.8
5°	3719.3
7.5°	3588.9
10°	3395.4
12.5°	3202.9
15°	2967.7
17.5°	2728.3
20°	2465.6
22.5°	2235.4
25°	1997.1
27.5°	1767.0
30°	1498.1
32.5°	1143.7
35°	734.3
37.5°	495.0
40°	327.9
42.5°	204.7
45°	119.2
47.5°	61.1
50°	28.5
52.5°	12.2
55°	7.1
57.5°	5.1
60°	4.1
62.5°	3.1
65°	3.1
67.5°	2.0
70°	2.0
72.5°	3.1
75°	2.0
77.5°	1.0
80°	1.0
82.5°	1.0
85°	1.0
87.5°	1.0
90°	0.0

(END OF REPORT)