

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365578

Luminaire Tested: **FLD6BX40D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365578
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-34)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS ACRYLIC, CLEAR 0.125", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3439.0 lumens
Efficiency: N/A
Efficacy: 84.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.95
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365578

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV

Luminous Intensity Polar Plot

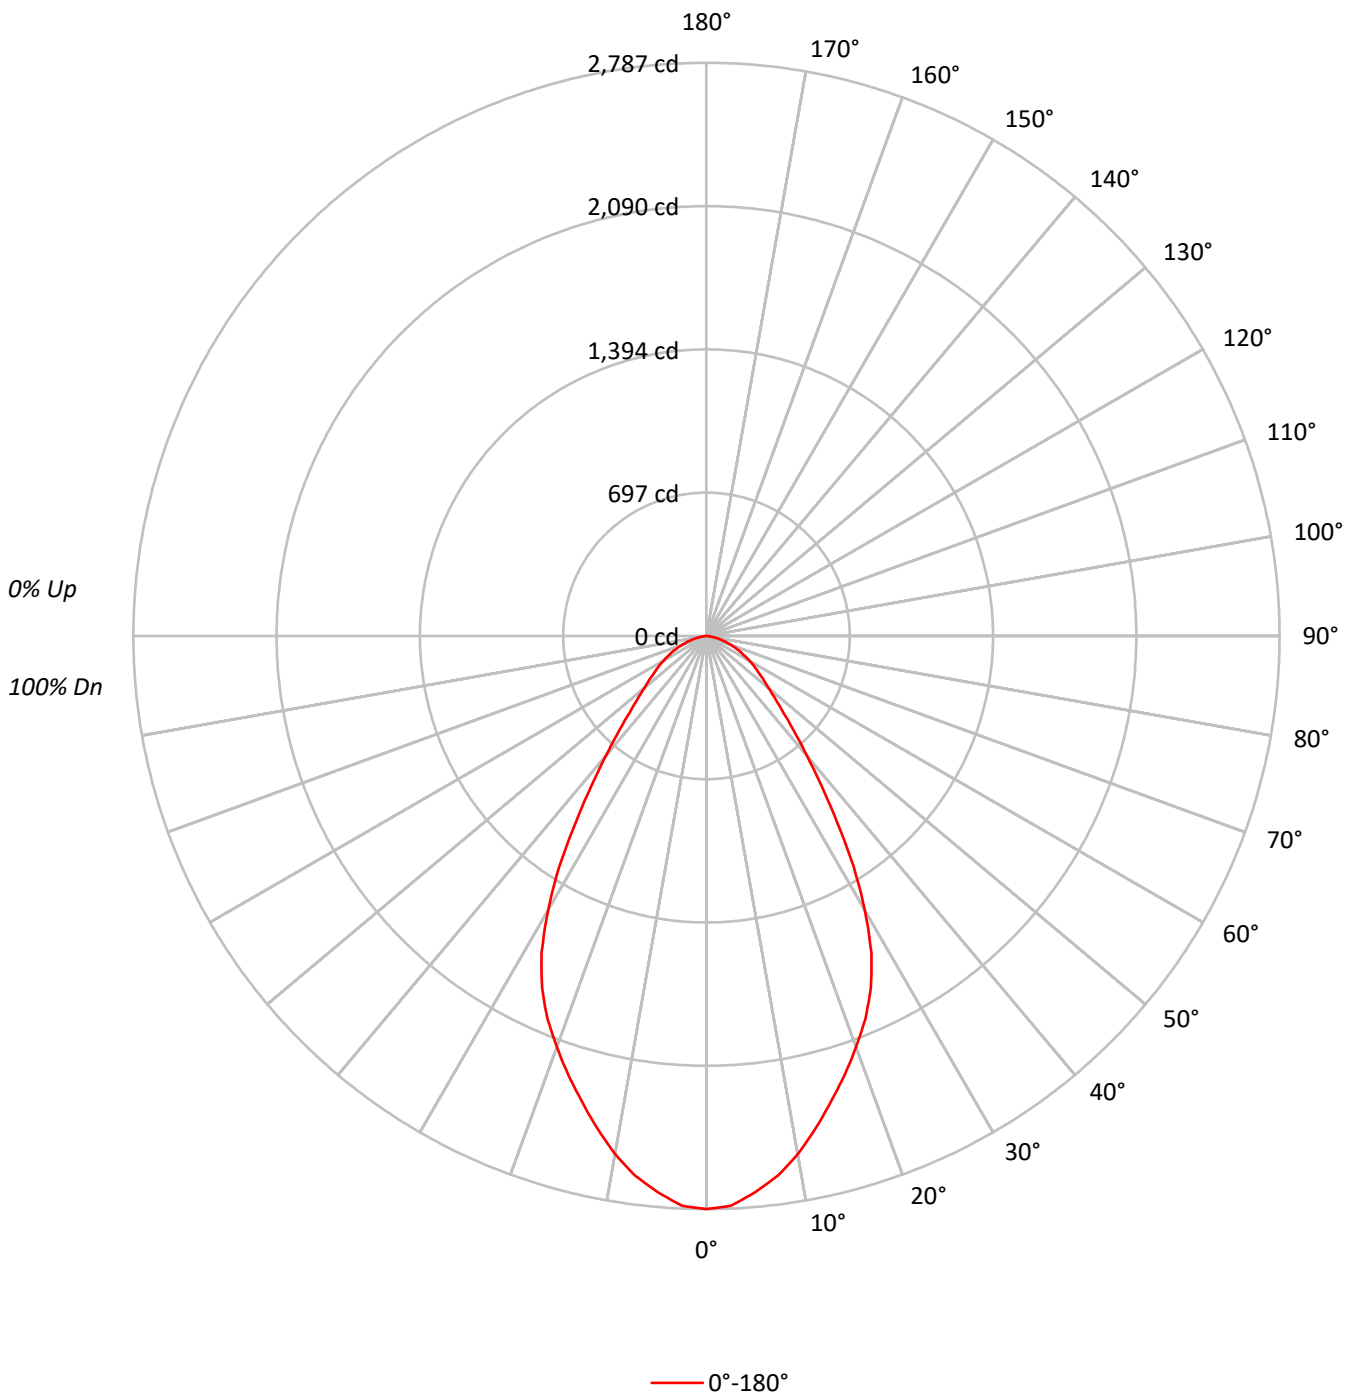



TEST NUMBER: P365578

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		82	78	75		80	77	74	72
4	91	82	75	70	89	80	74	69	78	73	68		76	71	67		74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62		70	65	61		69	64	61	59
6	80	69	62	57	78	68	62	57	67	61	56		65	60	56		64	59	55	54
7	75	64	57	52	74	64	57	52	62	56	52		61	55	51		60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	47		57	51	47		56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	44	42
10	64	52	46	41	62	52	45	41	51	45	41		50	45	41		49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	76128
5°	74431
10°	70961
15°	66246
20°	61822
25°	56996
30°	48542
35°	36927
40°	27032
45°	20566
50°	16713
55°	14673
60°	13188
65°	11653
70°	9863
75°	7789
80°	5364
85°	2225



TEST NUMBER: P365578

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	254.4	7.4
10°-20°	658.0	19.1
20°-30°	857.5	24.9
30°-40°	698.1	20.3
40°-50°	421.0	12.2
50°-60°	279.1	8.1
60°-70°	179.1	5.2
70°-80°	79.8	2.3
80°-90°	12.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1769.9	51.5
0°-40°	2468.0	71.8
0°-60°	3168.1	92.1
0°-90°	3439.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3439.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2787	
5°	2714	254
15°	2343	658
25°	1891	857
35°	1107	698
45°	532	421
55°	308	279
65°	180	179
75°	74	80
85°	7	12
90°	0	



TEST NUMBER: P365578

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV

CANDELA DISTRIBUTION (FULL):

0°	
0°	2787.0
2.5°	2772.8
5°	2714.5
7.5°	2647.8
10°	2558.4
12.5°	2451.9
15°	2342.6
17.5°	2236.1
20°	2126.8
22.5°	2017.5
25°	1891.1
27.5°	1736.3
30°	1539.0
32.5°	1333.1
35°	1107.4
37.5°	918.6
40°	758.1
42.5°	631.8
45°	532.4
47.5°	454.3
50°	393.3
52.5°	349.3
55°	308.1
57.5°	275.4
60°	241.4
62.5°	210.1
65°	180.3
67.5°	151.9
70°	123.5
72.5°	98.0
75°	73.8
77.5°	52.5
80°	34.1
82.5°	18.5
85°	7.1
87.5°	1.4
90°	0.0

(END OF REPORT)