

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366339

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366339
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR84
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3643.0 lumens
Efficiency: N/A
Efficacy: 66.1 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366339

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR84

Luminous Intensity Polar Plot

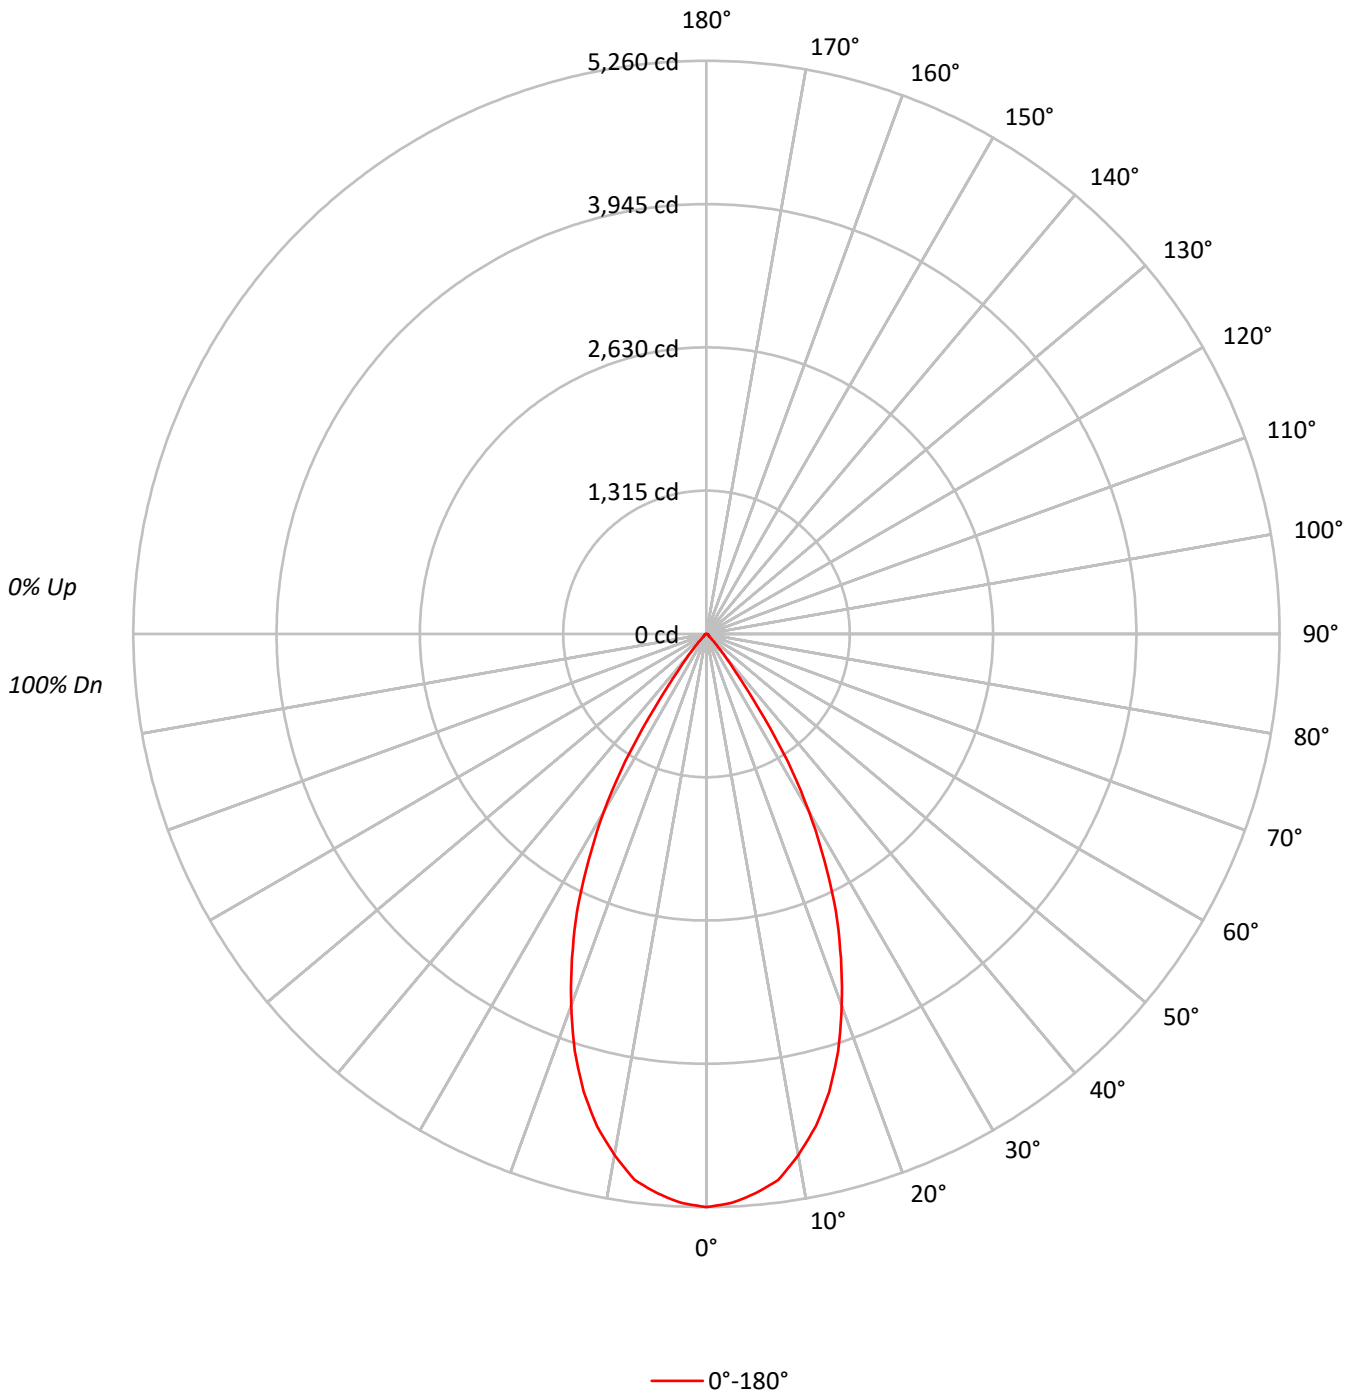



TEST NUMBER: P366339

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	376647
5°	370446
10°	352975
15°	322544
20°	276595
25°	221938
30°	155610
35°	71894
40°	23078
45°	7453
50°	3464
55°	3058
60°	3050
65°	2779
70°	2742
75°	3154
80°	4041
85°	6737



TEST NUMBER: P366339

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	483.4	13.3
10°-20°	1204.1	33.1
20°-30°	1264.5	34.7
30°-40°	561.1	15.4
40°-50°	72.5	2.0
50°-60°	22.7	0.6
60°-70°	16.0	0.4
70°-80°	11.6	0.3
80°-90°	7.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2952.0	81.0
0°-40°	3513.1	96.4
0°-60°	3608.2	99.0
0°-90°	3643.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3643.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5260	
5°	5154	483
15°	4351	1204
25°	2809	1265
35°	822	561
45°	74	73
55°	24	23
65°	16	16
75°	11	12
85°	8	7
90°	0	



TEST NUMBER: P366339

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR84

CANDELA DISTRIBUTION (FULL):

0°	
0°	5260.3
2.5°	5227.6
5°	5154.0
7.5°	5054.3
10°	4854.8
12.5°	4630.8
15°	4351.2
17.5°	4015.9
20°	3630.0
22.5°	3224.5
25°	2809.2
27.5°	2343.2
30°	1882.1
32.5°	1383.3
35°	822.5
37.5°	438.2
40°	246.9
42.5°	135.7
45°	73.6
47.5°	37.6
50°	31.1
52.5°	27.8
55°	24.5
57.5°	22.9
60°	21.3
62.5°	18.0
65°	16.4
67.5°	13.1
70°	13.1
72.5°	11.4
75°	11.4
77.5°	9.8
80°	9.8
82.5°	8.2
85°	8.2
87.5°	4.9
90°	0.0

(END OF REPORT)