

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364933

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-LI-BTR81**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P364933  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-25)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-LI-BTR81  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 5000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3847.1 lumens  
Efficiency: N/A  
Efficacy: 69.8 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.19  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 55.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P364933

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-LI-BTR81

### Luminous Intensity Polar Plot

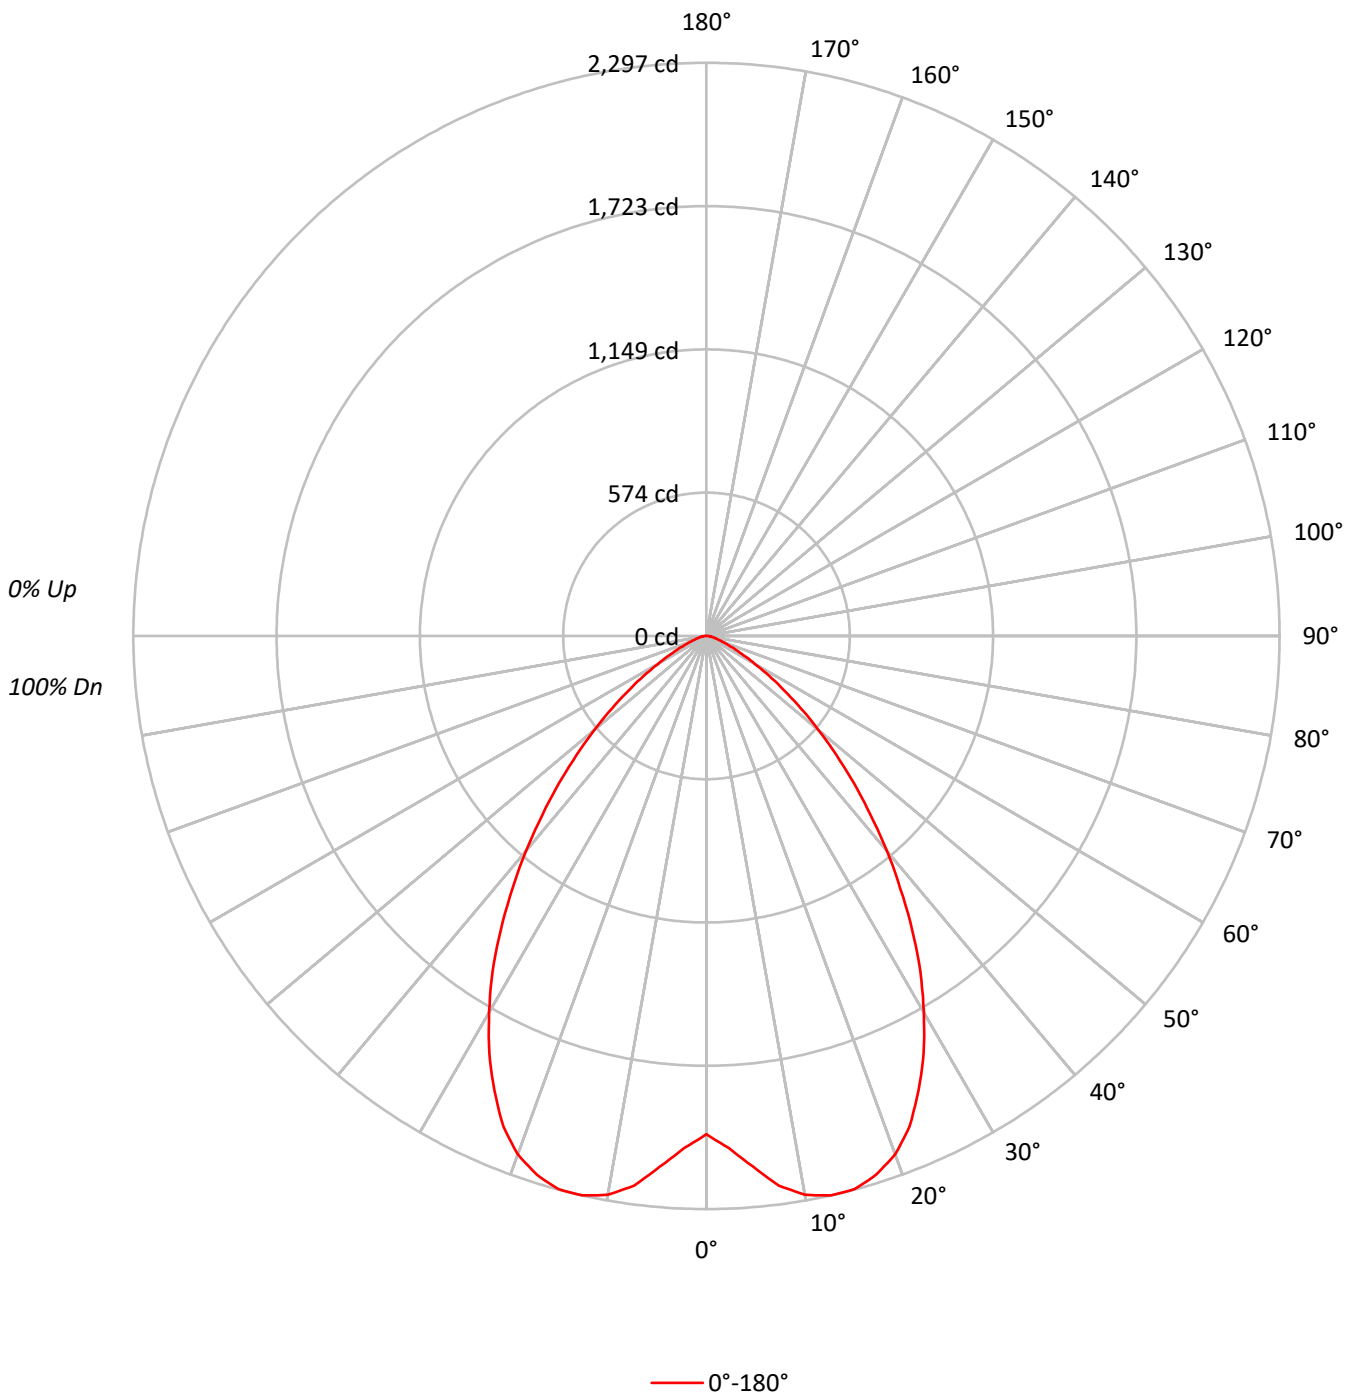



TEST NUMBER: P364933

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-LI-BTR81

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		82	78	75		80	76	73	72
4	91	81	74	69	89	80	73	68	78	72	68		75	71	67		73	69	66	64
5	85	74	67	61	83	73	66	61	71	65	61		69	64	60		68	63	59	58
6	79	68	61	55	77	67	60	55	66	59	55		64	59	54		63	58	54	52
7	74	63	55	50	73	62	55	50	61	54	50		59	54	49		58	53	49	47
8	70	58	51	46	68	57	50	46	56	50	45		55	49	45		54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	42		51	46	41		50	45	41	40
10	62	50	43	39	61	50	43	38	49	43	38		48	42	38		47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	142975
5°	153425
10°	165342
15°	170123
20°	168495
25°	158861
30°	144043
35°	125608
40°	105303
45°	84765
50°	65276
55°	47462
60°	32221
65°	21280
70°	13880
75°	10623
80°	9360
85°	11502



TEST NUMBER: P364933

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-LI-BTR81

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	208.4	5.4
10°-20°	643.8	16.7
20°-30°	919.3	23.9
30°-40°	894.4	23.2
40°-50°	647.0	16.8
50°-60°	346.8	9.0
60°-70°	130.8	3.4
70°-80°	43.0	1.1
80°-90°	13.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1771.6	46.0
0°-40°	2666.0	69.3
0°-60°	3659.8	95.1
0°-90°	3847.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3847.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1997	
5°	2135	208
15°	2295	644
25°	2011	919
35°	1437	894
45°	837	647
55°	380	347
65°	126	131
75°	38	43
85°	14	14
90°	0	



TEST NUMBER: P364933

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-LI-BTR81

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1996.8
2.5°	2054.4
5°	2134.6
7.5°	2221.8
10°	2274.1
12.5°	2296.8
15°	2295.0
17.5°	2263.6
20°	2211.3
22.5°	2127.6
25°	2010.8
27.5°	1885.2
30°	1742.2
32.5°	1595.7
35°	1437.0
37.5°	1276.6
40°	1126.6
42.5°	973.1
45°	837.1
47.5°	704.6
50°	586.0
52.5°	476.1
55°	380.2
57.5°	298.2
60°	225.0
62.5°	169.2
65°	125.6
67.5°	90.7
70°	66.3
72.5°	50.6
75°	38.4
77.5°	29.6
80°	22.7
82.5°	17.4
85°	14.0
87.5°	7.0
90°	0.0

(END OF REPORT)