

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365683

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-MW-BL86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365683
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-38)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-MW-BL86
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.250", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4090.0 lumens
Efficiency: N/A
Efficacy: 74.2 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.95
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365683

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-MW-BL86

Luminous Intensity Polar Plot

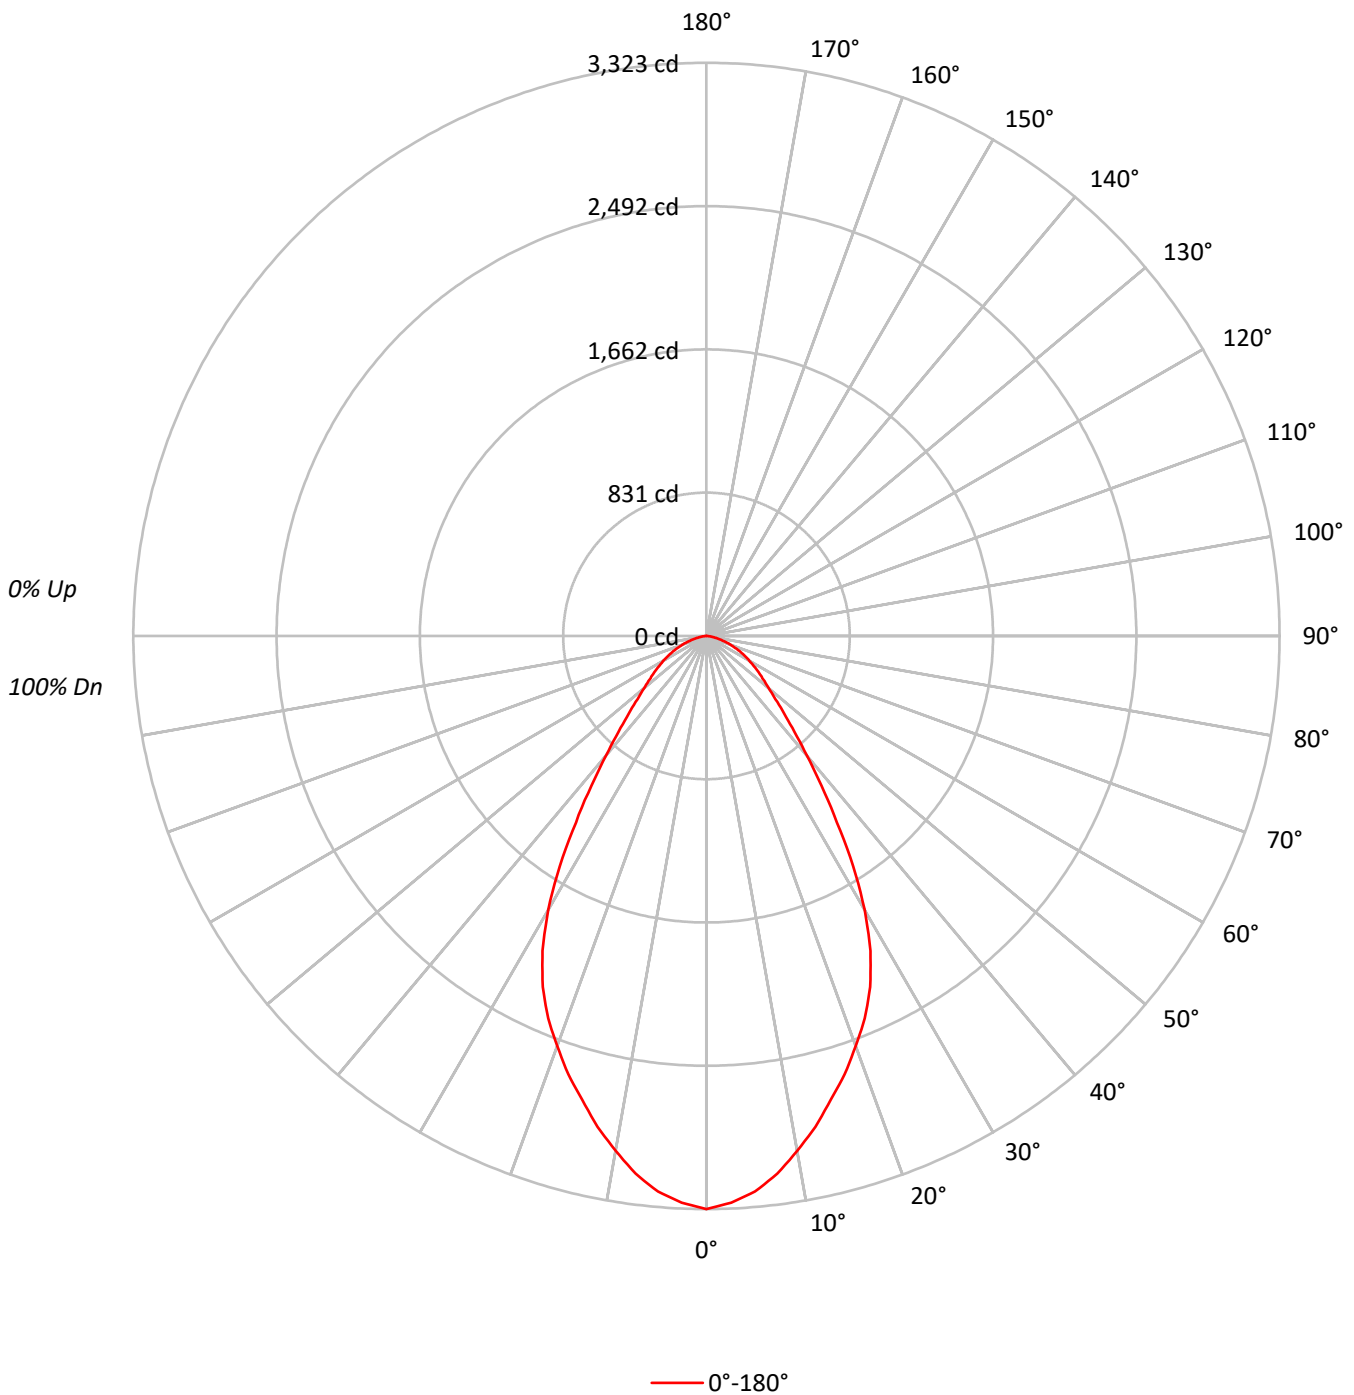



TEST NUMBER: P365683

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-MW-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		83	78	75		80	77	74	72
4	91	82	75	70	89	80	74	69	78	73	68		76	71	67		74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62		70	65	61		69	64	61	59
6	80	69	62	57	78	68	62	57	67	61	56		65	60	56		64	59	55	54
7	75	64	57	52	74	64	57	52	62	56	52		61	55	51		60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	47		57	51	47		56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	44	42
10	64	52	46	41	62	52	45	41	51	45	41		50	45	41		49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	90774
5°	88645
10°	84061
15°	78714
20°	73511
25°	67677
30°	57846
35°	44000
40°	32249
45°	24545
50°	20019
55°	17620
60°	15679
65°	13767
70°	11676
75°	9140
80°	6245
85°	2821



TEST NUMBER: P365683

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-MW-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	302.2	7.4
10°-20°	782.4	19.1
20°-30°	1018.7	24.9
30°-40°	831.4	20.3
40°-50°	502.6	12.3
50°-60°	332.9	8.1
60°-70°	211.9	5.2
70°-80°	93.9	2.3
80°-90°	14.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2103.2	51.4
0°-40°	2934.6	71.8
0°-60°	3770.0	92.2
0°-90°	4090.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4090.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3323	
5°	3233	302
15°	2784	782
25°	2246	1019
35°	1320	831
45°	635	503
55°	370	333
65°	213	212
75°	87	94
85°	9	14
90°	0	



TEST NUMBER: P365683

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-MW-BL86

CANDELA DISTRIBUTION (FULL):

	0°
0°	3323.2
2.5°	3288.9
5°	3232.9
7.5°	3144.5
10°	3030.7
12.5°	2915.2
15°	2783.5
17.5°	2664.3
20°	2528.9
22.5°	2399.0
25°	2245.5
27.5°	2057.8
30°	1834.0
32.5°	1583.1
35°	1319.5
37.5°	1095.7
40°	904.4
42.5°	752.7
45°	635.4
47.5°	543.3
50°	471.1
52.5°	415.2
55°	370.0
57.5°	326.7
60°	287.0
62.5°	249.1
65°	213.0
67.5°	178.7
70°	146.2
72.5°	115.5
75°	86.6
77.5°	61.4
80°	39.7
82.5°	21.7
85°	9.0
87.5°	1.8
90°	0.0

(END OF REPORT)