

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365711

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-MW-BTR86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365711
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-17)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-MW-BTR86
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.250", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3266.0 lumens
Efficiency: N/A
Efficacy: 56.2 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.83
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365711

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-MW-BTR86

Luminous Intensity Polar Plot

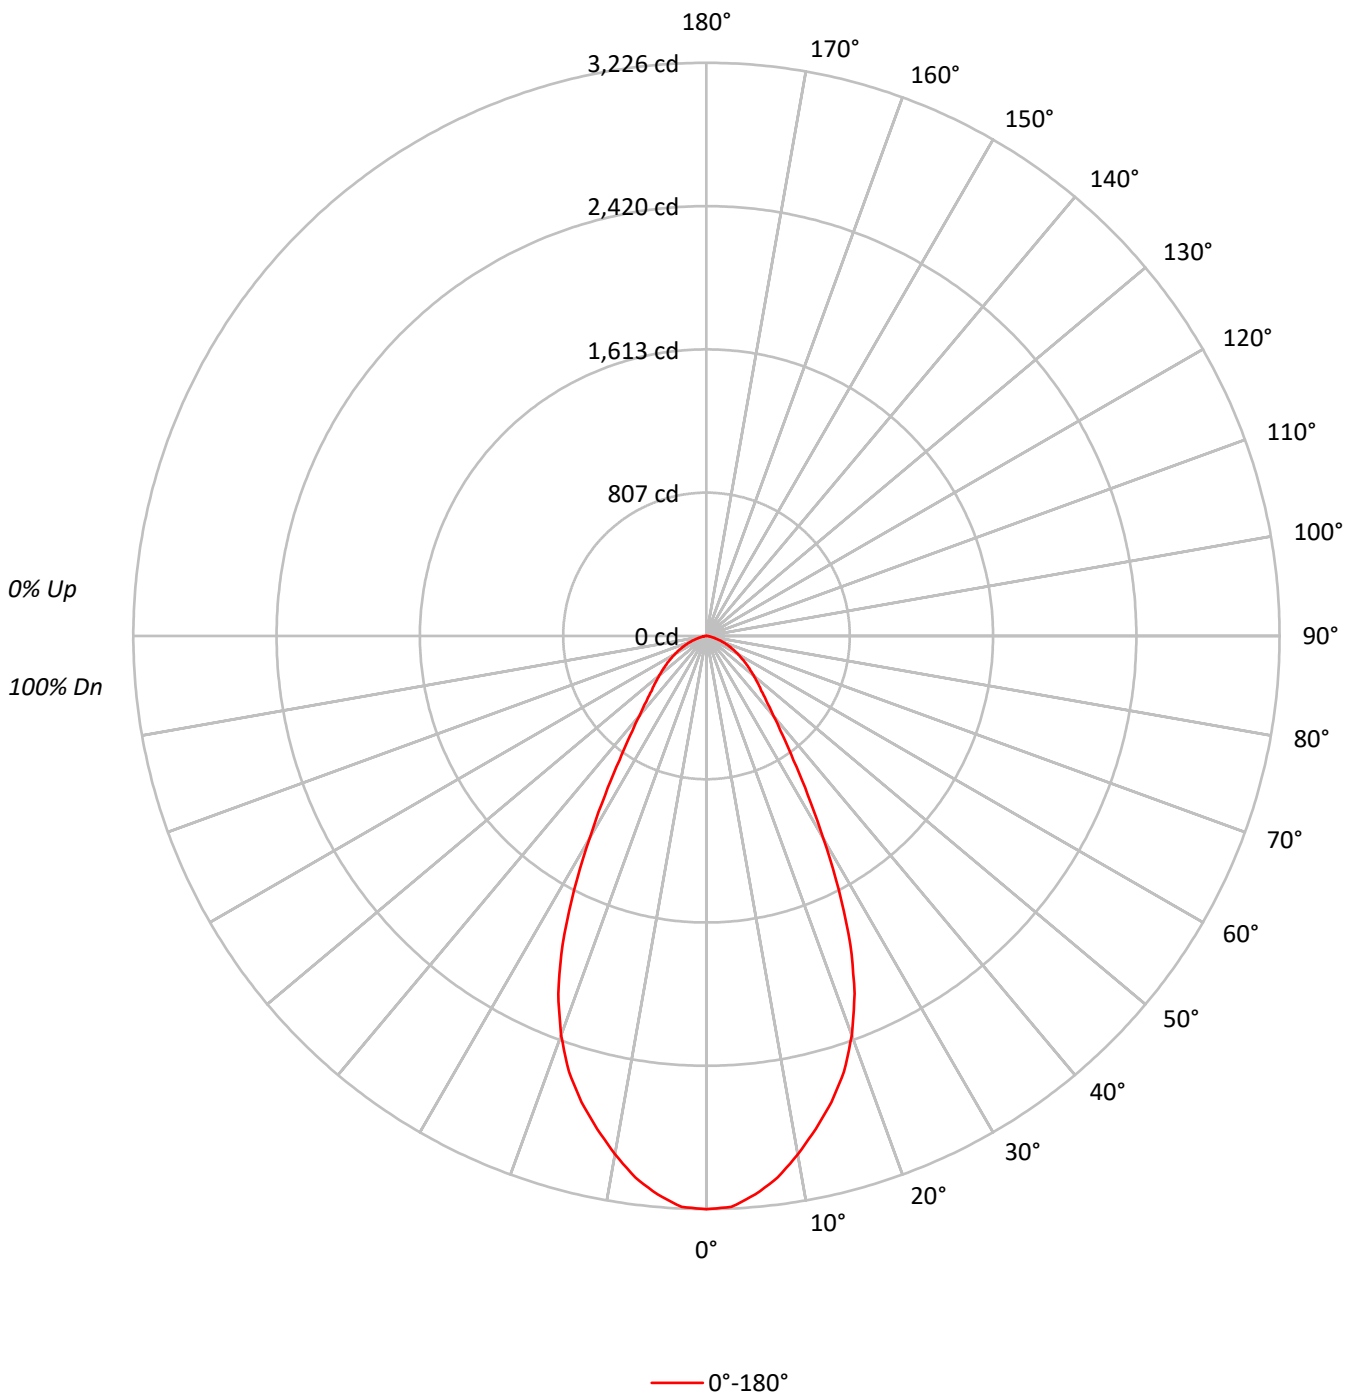



TEST NUMBER: P365711

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-MW-BTR86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	98	93	89	94	91	87		91	88	85		88	86	84	82
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82	79	76	74
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	72	69	68
5	87	78	71	66	86	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67	62	59	57
7	78	67	60	56	76	66	60	55	65	59	55		64	59	55		63	58	54	53
8	74	63	56	51	72	62	56	51	61	55	51		60	55	51		59	54	51	49
9	70	59	52	48	69	59	52	48	58	52	48		57	51	48		56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45		53	48	45		53	48	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	231016
5°	226817
10°	215407
15°	201338
20°	182203
25°	151308
30°	108565
35°	74517
40°	54848
45°	44322
50°	38542
55°	33880
60°	29285
65°	24939
70°	19616
75°	13749
80°	8659
85°	9448



TEST NUMBER: P365711

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-MW-BTR86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	295.2	9.0
10°-20°	757.9	23.2
20°-30°	859.6	26.3
30°-40°	551.0	16.9
40°-50°	345.4	10.6
50°-60°	243.6	7.5
60°-70°	146.3	4.5
70°-80°	55.8	1.7
80°-90°	11.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1912.7	58.6
0°-40°	2463.7	75.4
0°-60°	3052.6	93.5
0°-90°	3266.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3266.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3226	
5°	3156	295
15°	2716	758
25°	1915	860
35°	852	551
45°	438	345
55°	271	244
65°	147	146
75°	50	56
85°	12	11
90°	0	



TEST NUMBER: P365711

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-MW-BTR86

CANDELA DISTRIBUTION (FULL):

	0°
0°	3226.4
2.5°	3216.9
5°	3155.7
7.5°	3073.5
10°	2962.7
12.5°	2842.2
15°	2716.1
17.5°	2572.7
20°	2391.2
22.5°	2179.0
25°	1915.2
27.5°	1611.3
30°	1313.1
32.5°	1060.8
35°	852.5
37.5°	701.5
40°	586.8
42.5°	502.7
45°	437.7
47.5°	389.9
50°	346.0
52.5°	307.7
55°	271.4
57.5°	237.0
60°	204.5
62.5°	175.8
65°	147.2
67.5°	120.4
70°	93.7
72.5°	70.7
75°	49.7
77.5°	34.4
80°	21.0
82.5°	13.4
85°	11.5
87.5°	5.7
90°	0.0

(END OF REPORT)