

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366471

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR94**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366471
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-33)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR94
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM GLASS, TEMPERED CLEAR 0.187", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4613.0 lumens
Efficiency: N/A
Efficacy: 79.4 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366471

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR94

Luminous Intensity Polar Plot

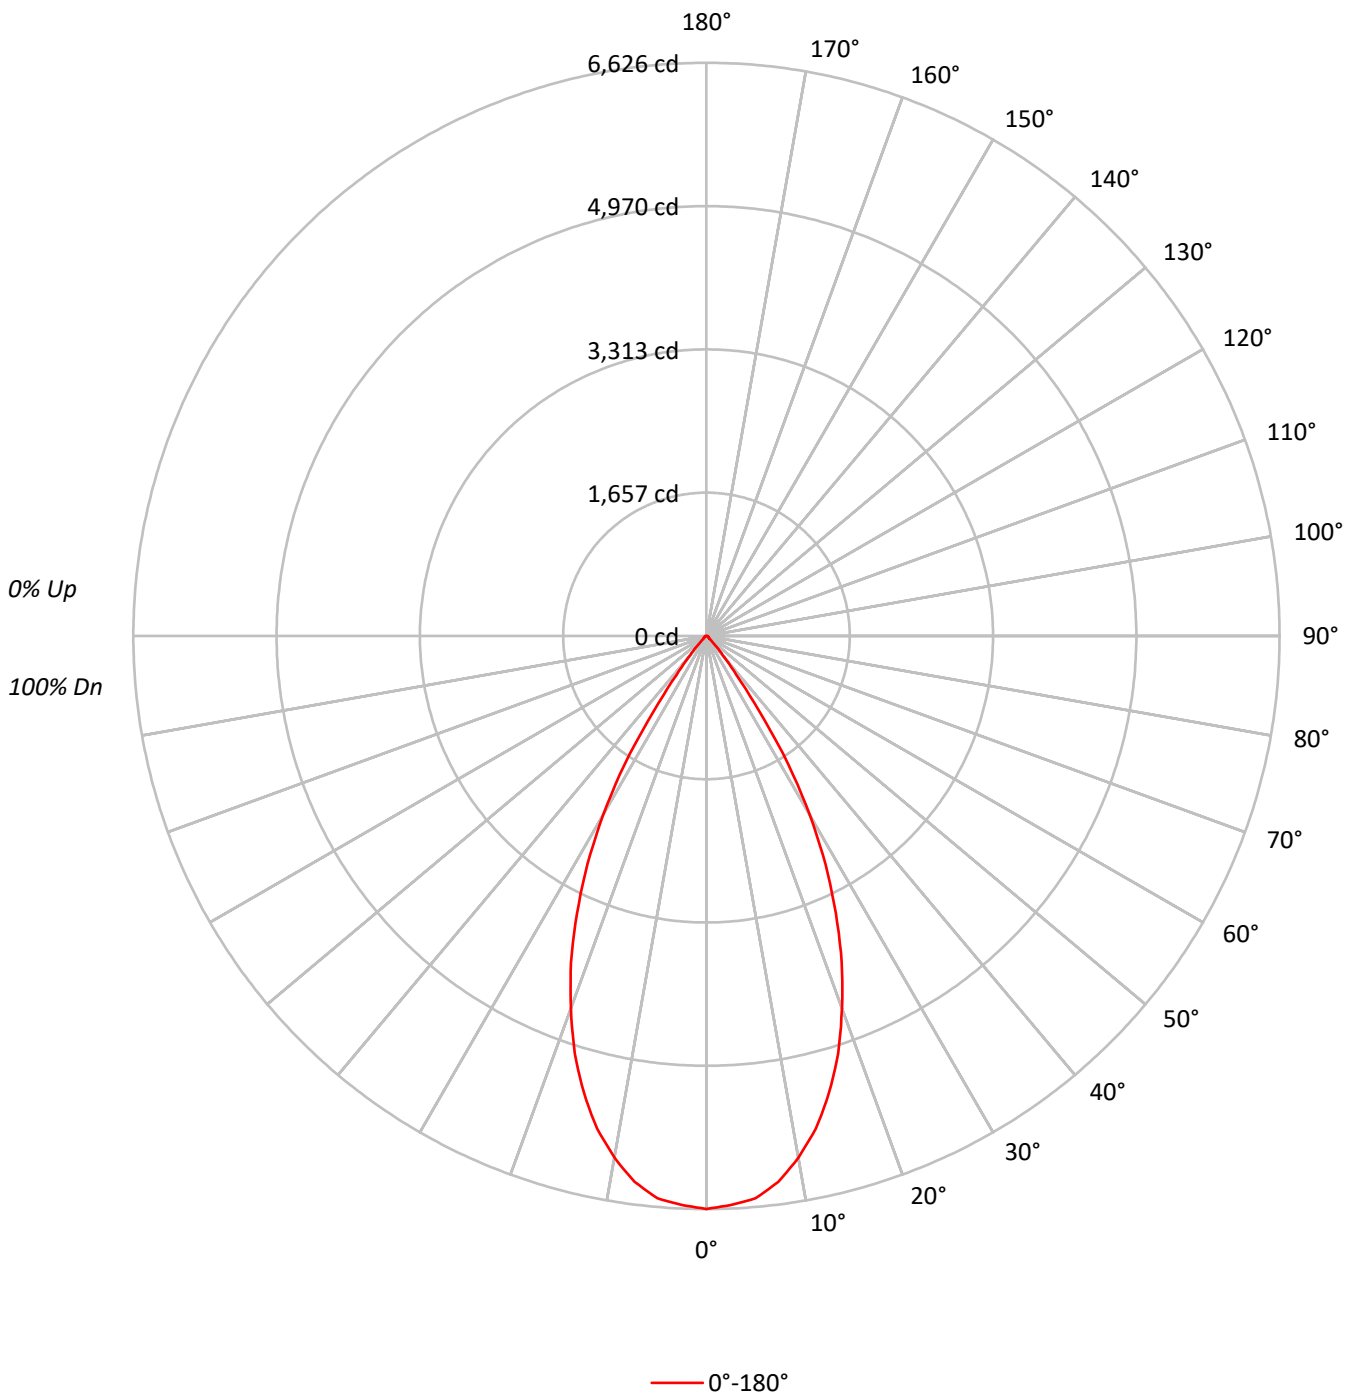



TEST NUMBER: P366471

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR94

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	88	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78
5	94	87	81	77	93	86	81	77	84	80	76	82	78	75	81	77	75	73
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	73	71	69
7	86	78	72	68	85	77	72	68	76	71	67	74	70	67	73	70	67	65
8	82	74	68	64	81	73	68	64	72	67	64	71	67	63	70	66	63	62
9	79	70	64	61	78	69	64	61	68	64	60	68	63	60	67	63	60	59
10	76	66	61	57	75	66	61	57	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	474398
5°	469030
10°	445276
15°	405501
20°	348983
25°	279587
30°	197247
35°	91361
40°	29705
45°	9488
50°	4534
55°	4070
60°	3795
65°	3456
70°	3412
75°	4509
80°	5031
85°	8380



TEST NUMBER: P366471

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR94

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	609.8	13.2
10°-20°	1517.1	32.9
20°-30°	1601.0	34.7
30°-40°	716.5	15.5
40°-50°	93.8	2.0
50°-60°	28.9	0.6
60°-70°	20.4	0.4
70°-80°	16.2	0.4
80°-90°	9.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3727.9	80.8
0°-40°	4444.3	96.3
0°-60°	4567.0	99.0
0°-90°	4613.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4613.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6626	
5°	6526	610
15°	5470	1517
25°	3539	1601
35°	1045	716
45°	94	94
55°	33	29
65°	20	20
75°	16	16
85°	10	9
90°	0	



TEST NUMBER: P366471

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR94

CANDELA DISTRIBUTION (FULL):

0°	
0°	6625.5
2.5°	6582.7
5°	6525.6
7.5°	6364.7
10°	6124.3
12.5°	5837.0
15°	5470.3
17.5°	5062.8
20°	4580.0
22.5°	4089.0
25°	3538.9
27.5°	2982.7
30°	2385.7
32.5°	1768.4
35°	1045.2
37.5°	568.4
40°	317.8
42.5°	177.2
45°	93.7
47.5°	48.9
50°	40.7
52.5°	34.6
55°	32.6
57.5°	28.5
60°	26.5
62.5°	22.4
65°	20.4
67.5°	18.3
70°	16.3
72.5°	16.3
75°	16.3
77.5°	14.3
80°	12.2
82.5°	12.2
85°	10.2
87.5°	6.1
90°	0.0

(END OF REPORT)