

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366493

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366493
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL86
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.250", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5439.0 lumens
Efficiency: N/A
Efficacy: 93.6 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366493

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL86

Luminous Intensity Polar Plot

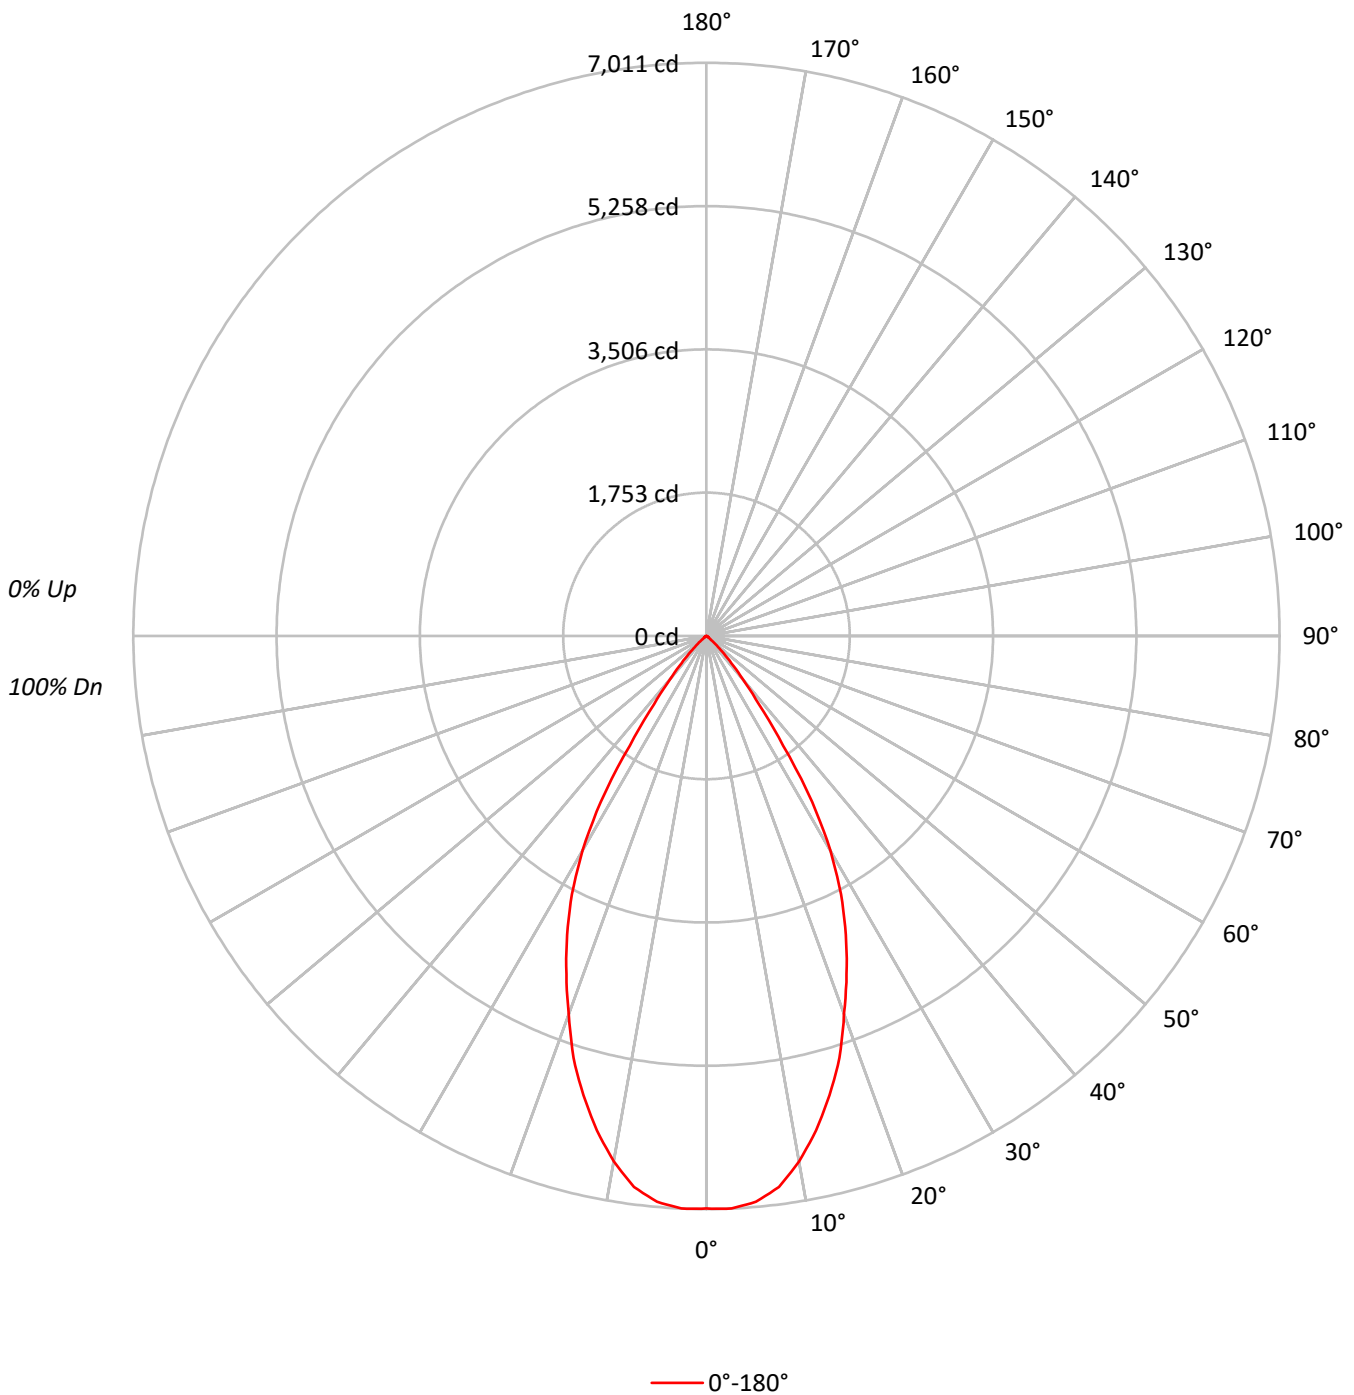



TEST NUMBER: P366493

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75		81	77	74		80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		76	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65		73	68	65		72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62		69	65	61		68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58		66	61	58		65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	191341
5°	190536
10°	180998
15°	164410
20°	143065
25°	121632
30°	95679
35°	54590
40°	24564
45°	10341
50°	3264
55°	986
60°	677
65°	536
70°	495
75°	654
80°	330
85°	658



TEST NUMBER: P366493

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	650.0	12.0
10°-20°	1617.2	29.7
20°-30°	1832.6	33.7
30°-40°	1062.4	19.5
40°-50°	235.6	4.3
50°-60°	25.8	0.5
60°-70°	8.4	0.2
70°-80°	5.4	0.1
80°-90°	1.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4099.8	75.4
0°-40°	5162.3	94.9
0°-60°	5423.7	99.7
0°-90°	5439.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5439.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7005	
5°	6949	650
15°	5814	1617
25°	4036	1833
35°	1637	1062
45°	268	236
55°	21	26
65°	8	8
75°	6	5
85°	2	1
90°	0	



TEST NUMBER: P366493

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL86

CANDELA DISTRIBUTION (FULL):

0°	
0°	7004.9
2.5°	7011.1
5°	6948.9
7.5°	6797.4
10°	6525.6
12.5°	6195.7
15°	5813.9
17.5°	5411.4
20°	4921.7
22.5°	4479.7
25°	4035.7
27.5°	3562.6
30°	3033.5
32.5°	2409.0
35°	1637.1
37.5°	1052.0
40°	688.9
42.5°	450.3
45°	267.7
47.5°	149.4
50°	76.8
52.5°	35.3
55°	20.7
57.5°	16.6
60°	12.4
62.5°	10.4
65°	8.3
67.5°	6.2
70°	6.2
72.5°	6.2
75°	6.2
77.5°	4.1
80°	2.1
82.5°	2.1
85°	2.1
87.5°	0.0
90°	0.0

(END OF REPORT)