

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366495

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89AM**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366495
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-48)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89AM
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, OPAL SMOOTH 0.125", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2354.0 lumens
Efficiency: N/A
Efficacy: 40.5 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.26 / 1.38
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366495

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89AM

Luminous Intensity Polar Plot

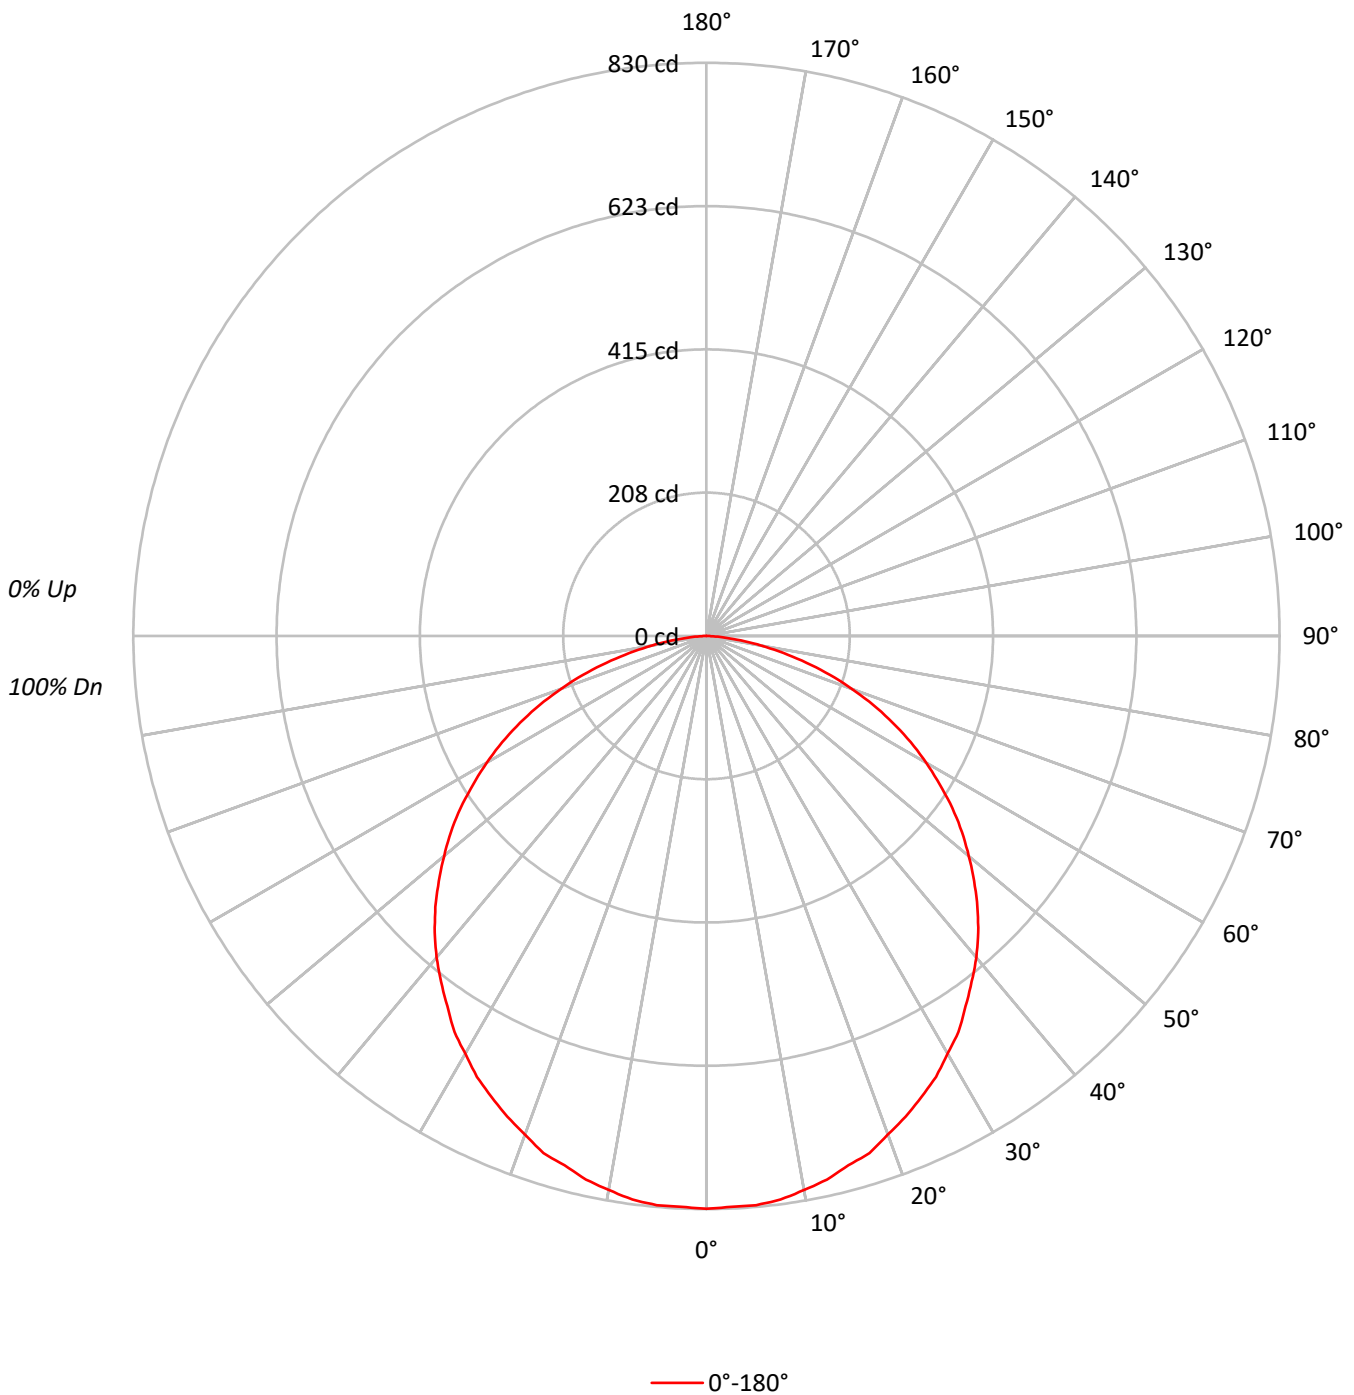



TEST NUMBER: P366495

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89AM

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	109	104	100	96	106	102	98	95	98	94	92		94	91	89		90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	75		82	78	74		79	75	72	70
3	90	80	71	65	88	78	70	64	75	69	63		72	67	62		70	65	61	59
4	83	70	62	55	80	69	61	55	67	59	54		64	58	53		62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46		58	51	46		56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41		52	45	40		51	45	40	38
7	65	51	42	36	63	50	42	36	49	41	36		47	41	36		46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32		43	37	32		42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29		40	33	29		39	33	29	27
10	53	40	32	26	52	39	31	26	38	31	26		37	31	26		36	30	26	24

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	22658
5°	22687
10°	22597
15°	22442
20°	22333
25°	22200
30°	22035
35°	21818
40°	21676
45°	21443
50°	21078
55°	20706
60°	20066
65°	19235
70°	17866
75°	15820
80°	12616
85°	7271



TEST NUMBER: P366495

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89AM

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.6	3.3
10°-20°	224.5	9.5
20°-30°	339.6	14.4
30°-40°	410.1	17.4
40°-50°	427.7	18.2
50°-60°	387.8	16.5
60°-70°	294.0	12.5
70°-80°	159.1	6.8
80°-90°	32.7	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	642.7	27.3
0°-40°	1052.7	44.7
0°-60°	1868.2	79.4
0°-90°	2354.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2354.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	830	
5°	827	79
15°	794	224
25°	737	340
35°	654	410
45°	555	428
55°	435	388
65°	298	294
75°	150	159
85°	23	33
90°	0	



TEST NUMBER: P366495

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89AM

CANDELA DISTRIBUTION (FULL):

0°	
0°	829.5
2.5°	827.4
5°	827.4
7.5°	823.2
10°	814.7
12.5°	806.3
15°	793.6
17.5°	785.2
20°	768.3
22.5°	753.5
25°	736.6
27.5°	719.7
30°	698.6
32.5°	679.6
35°	654.3
37.5°	631.1
40°	607.9
42.5°	582.5
45°	555.1
47.5°	525.6
50°	496.0
52.5°	466.5
55°	434.8
57.5°	401.0
60°	367.3
62.5°	333.5
65°	297.6
67.5°	261.7
70°	223.7
72.5°	187.8
75°	149.9
77.5°	114.0
80°	80.2
82.5°	50.7
85°	23.2
87.5°	6.3
90°	0.0

(END OF REPORT)