

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366496

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366496
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-45)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS ACRYLIC, CLEAR 0.125", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5785.9 lumens
Efficiency: N/A
Efficacy: 99.6 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366496

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89BV

Luminous Intensity Polar Plot

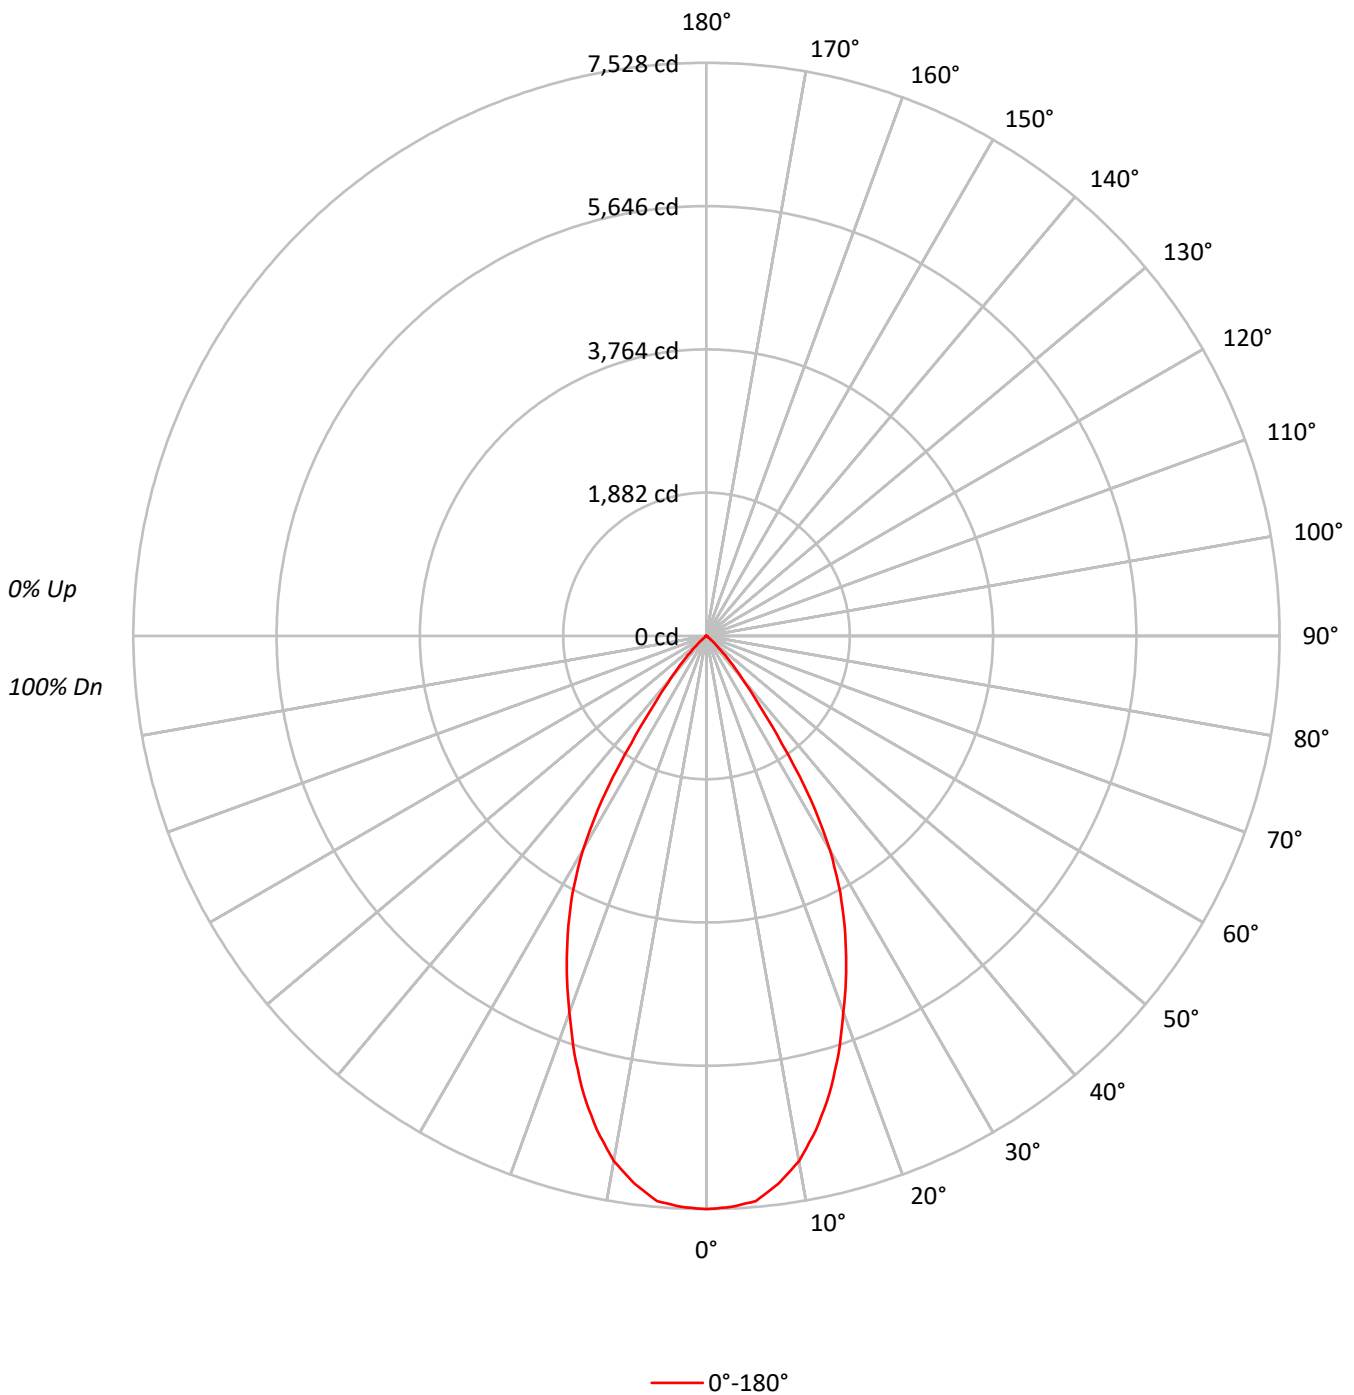



TEST NUMBER: P366496

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	108	104	100	97	106	102	99	96	99	96	93	96	94	91	93	91	90	88
3	103	97	92	89	101	96	91	88	93	89	86	91	88	85	88	86	84	82
4	98	91	86	82	97	90	85	81	88	84	80	86	82	79	84	81	78	77
5	94	86	80	76	92	85	79	76	83	78	75	81	77	74	80	76	74	72
6	89	81	75	71	88	80	74	71	78	74	70	77	73	70	76	72	69	68
7	85	76	70	66	84	75	70	66	74	69	66	73	69	65	72	68	65	64
8	81	72	66	62	80	71	66	62	70	65	62	69	65	62	68	64	61	60
9	77	68	62	59	76	68	62	58	67	62	58	66	61	58	65	61	58	57
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	205616
5°	204260
10°	194215
15°	176237
20°	152885
25°	129969
30°	102275
35°	57618
40°	25877
45°	10758
50°	3225
55°	905
60°	574
65°	407
70°	335
75°	443
80°	330
85°	0



TEST NUMBER: P366496

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	695.7	12.0
10°-20°	1729.8	29.9
20°-30°	1958.7	33.9
30°-40°	1123.0	19.4
40°-50°	244.0	4.2
50°-60°	23.9	0.4
60°-70°	7.0	0.1
70°-80°	3.6	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4384.1	75.8
0°-40°	5507.1	95.2
0°-60°	5775.0	99.8
0°-90°	5785.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5785.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7528	
5°	7449	696
15°	6232	1730
25°	4312	1959
35°	1728	1123
45°	278	244
55°	19	24
65°	6	7
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P366496

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-WMH-BL89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	7527.5
2.5°	7506.4
5°	7449.4
7.5°	7253.2
10°	7002.1
12.5°	6643.5
15°	6232.1
17.5°	5759.5
20°	5259.5
22.5°	4791.2
25°	4312.3
27.5°	3805.9
30°	3242.6
32.5°	2554.9
35°	1727.9
37.5°	1092.8
40°	725.7
42.5°	464.1
45°	278.5
47.5°	151.9
50°	75.9
52.5°	31.6
55°	19.0
57.5°	14.8
60°	10.5
62.5°	8.4
65°	6.3
67.5°	6.3
70°	4.2
72.5°	4.2
75°	4.2
77.5°	2.1
80°	2.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)