

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581302

Luminaire Tested: **HC460D010-HM44560835-41NDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P581302
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC460D010-HM44560835-41NDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4759.7 lumens
Efficiency: N/A
Efficacy: 86.5 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 55
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581302

CATALOG NUMBER: HC460D010-HM44560835-41NDH

Luminous Intensity Polar Plot

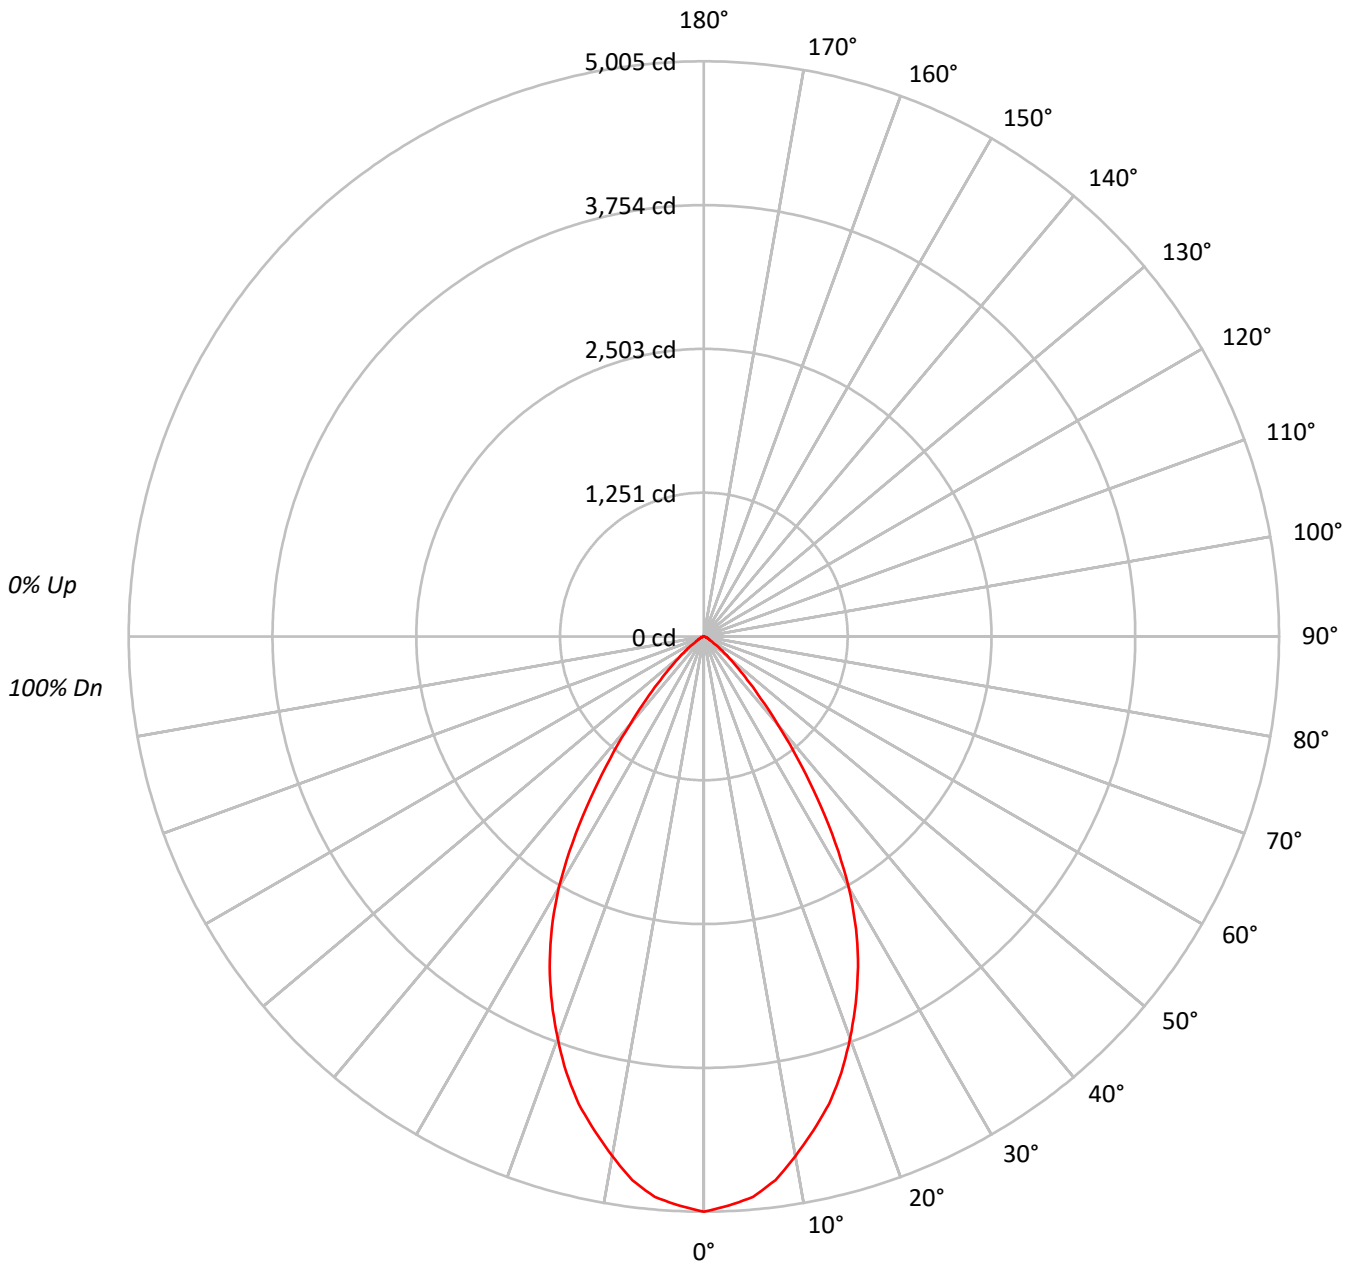



TEST NUMBER: P581302

CATALOG NUMBER: HC460D010-HM44560835-41NDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	63	63	63	63
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48	48	48	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	617345
5°	606133
10°	574928
15°	537565
20°	488228
25°	432026
30°	359358
35°	259128
40°	161741
45°	93289
50°	52617
55°	25053
60°	14382
65°	11003
70°	7393
75°	4909
80°	4901
85°	4812



TEST NUMBER: P581302

CATALOG NUMBER: HC460D010-HM44560835-41NDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	457.6	9.6
10°-20°	1174.3	24.7
20°-30°	1444.3	30.3
30°-40°	1072.7	22.5
40°-50°	436.1	9.2
50°-60°	120.8	2.5
60°-70°	37.6	0.8
70°-80°	12.6	0.3
80°-90°	3.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3076.3	64.6
0°-40°	4148.9	87.2
0°-60°	4705.8	98.9
0°-90°	4759.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4759.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5005	
5°	4895	458
15°	4210	1174
25°	3174	1444
35°	1721	1073
45°	535	436
55°	116	121
65°	38	38
75°	10	13
85°	3	4
90°	0	



TEST NUMBER: P581302

CATALOG NUMBER: HC460D010-HM44560835-41NDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	5005.0
2.5°	4957.1
5°	4895.4
7.5°	4772.0
10°	4590.3
12.5°	4401.7
15°	4209.7
17.5°	3980.0
20°	3719.5
22.5°	3455.5
25°	3174.4
27.5°	2869.3
30°	2523.1
32.5°	2128.9
35°	1720.9
37.5°	1337.0
40°	1004.5
42.5°	733.7
45°	534.8
47.5°	384.0
50°	274.2
52.5°	188.6
55°	116.5
57.5°	75.5
60°	58.3
62.5°	47.9
65°	37.7
67.5°	27.4
70°	20.5
72.5°	17.1
75°	10.3
77.5°	6.9
80°	6.9
82.5°	3.4
85°	3.4
87.5°	3.4
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)