

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584312

Luminaire Tested: **HC830D010-HM82555927-81WDBB**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584312
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC830D010-HM82555927-81WDBB
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2683.7 lumens
Efficiency: N/A
Efficacy: 95.8 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584312

CATALOG NUMBER: HC830D010-HM82555927-81WDBB

Luminous Intensity Polar Plot

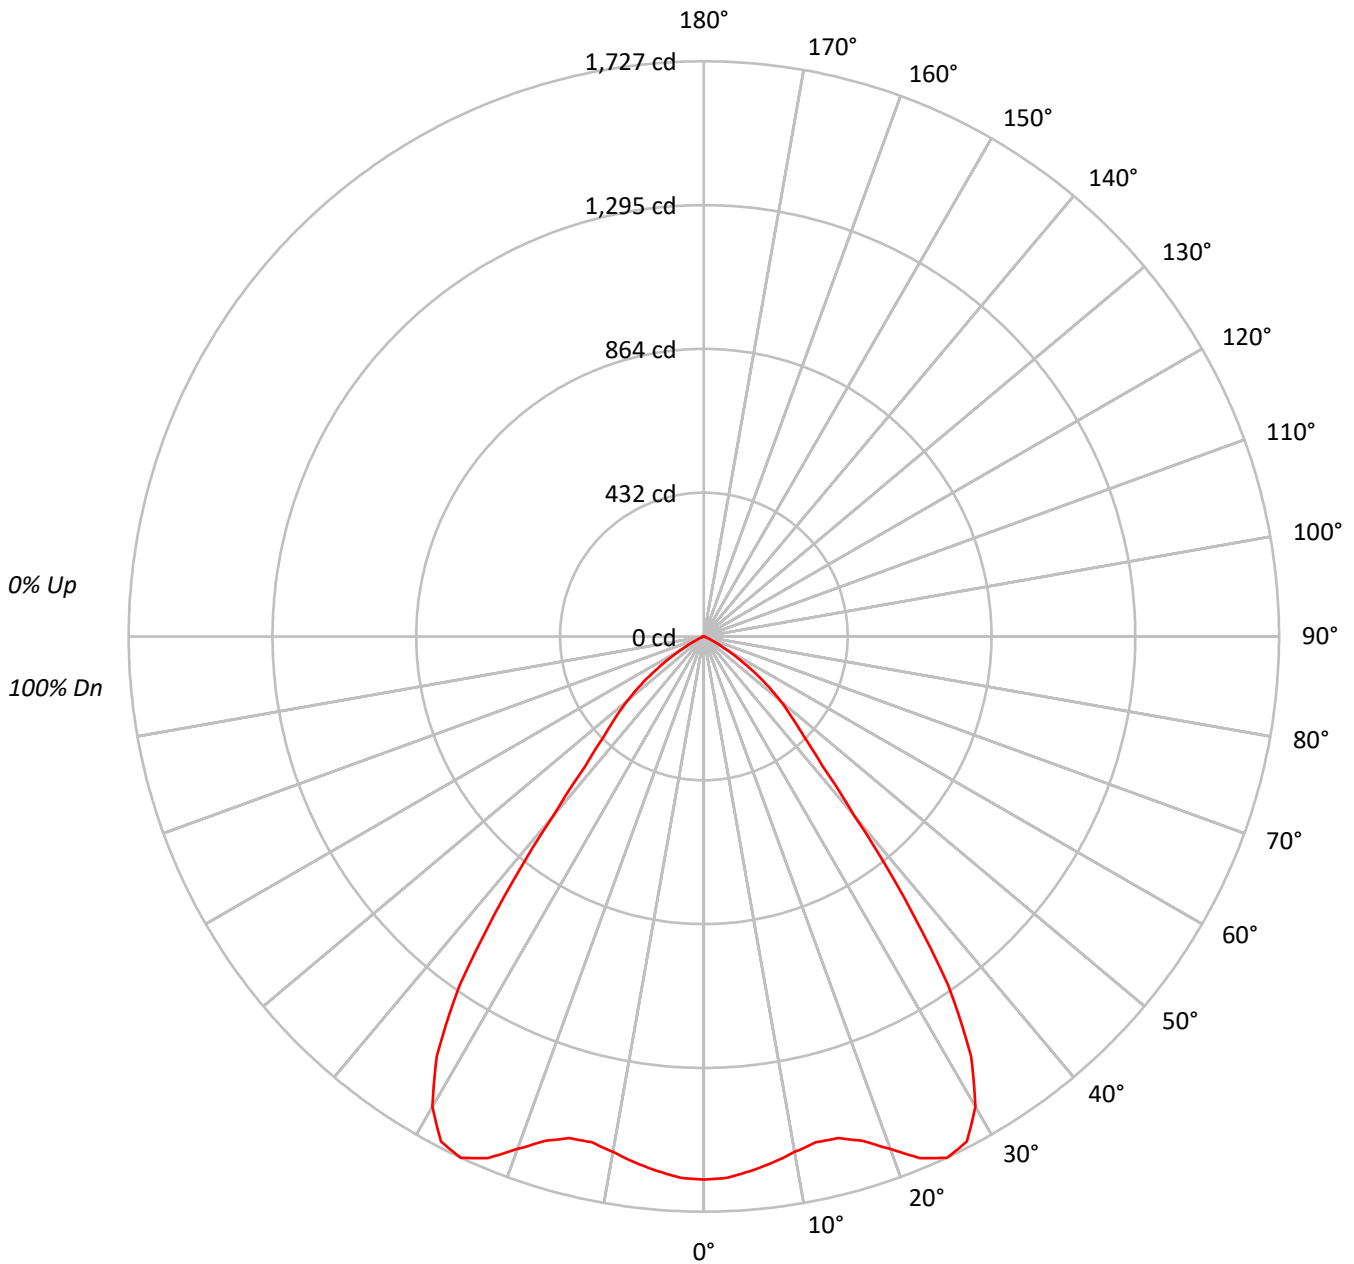



TEST NUMBER: P584312

CATALOG NUMBER: HC830D010-HM82555927-81WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	74	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	50282
5°	49864
10°	49204
15°	49766
20°	53742
25°	58770
30°	58060
35°	48162
40°	28347
45°	18521
50°	14358
55°	9537
60°	4644
65°	1437
70°	487
75°	429
80°	320
85°	637



TEST NUMBER: P584312

CATALOG NUMBER: HC830D010-HM82555927-81WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.6	5.7
10°-20°	447.9	16.7
20°-30°	783.0	29.2
30°-40°	761.7	28.4
40°-50°	346.4	12.9
50°-60°	160.6	6.0
60°-70°	26.9	1.0
70°-80°	3.3	0.1
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1383.4	51.6
0°-40°	2145.1	79.9
0°-60°	2652.2	98.8
0°-90°	2683.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2683.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1631	
5°	1611	153
15°	1559	448
25°	1727	783
35°	1279	762
45°	425	346
55°	177	161
65°	20	27
75°	4	3
85°	2	1
90°	0	



TEST NUMBER: P584312

CATALOG NUMBER: HC830D010-HM82555927-81WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	1630.6
2.5°	1627.0
5°	1610.9
7.5°	1592.9
10°	1571.4
12.5°	1555.3
15°	1558.9
17.5°	1587.6
20°	1637.7
22.5°	1695.0
25°	1727.3
27.5°	1709.4
30°	1630.6
32.5°	1492.6
35°	1279.4
37.5°	985.4
40°	704.2
42.5°	525.1
45°	424.7
47.5°	358.4
50°	299.3
52.5°	238.3
55°	177.4
57.5°	121.9
60°	75.3
62.5°	41.3
65°	19.7
67.5°	8.9
70°	5.4
72.5°	3.6
75°	3.6
77.5°	1.8
80°	1.8
82.5°	1.8
85°	1.8
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)