

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885693

Luminaire Tested: ML104LSFL95FS1E-TIR1D40FL-TL1RDMWB-340LM-2700K

Issue Date: 6/19/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P885693  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-127)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 6/19/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML104LSFL95FS1E-TIR1D40FL-TL1RDMWB-340LM-2700K  
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 40D TIR, MATTE WHITE BAFFLED TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 369.2 lumens  
Efficiency: N/A  
Efficacy: 60.5 lumens/watt  
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.66  
Luminous Opening: Circular (Dia: 0.08' x H: 0')  
CIE Type: Direct

Input Watts (W): 6.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P885693  
CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMWB-340LM-2700K

### Luminous Intensity Polar Plot

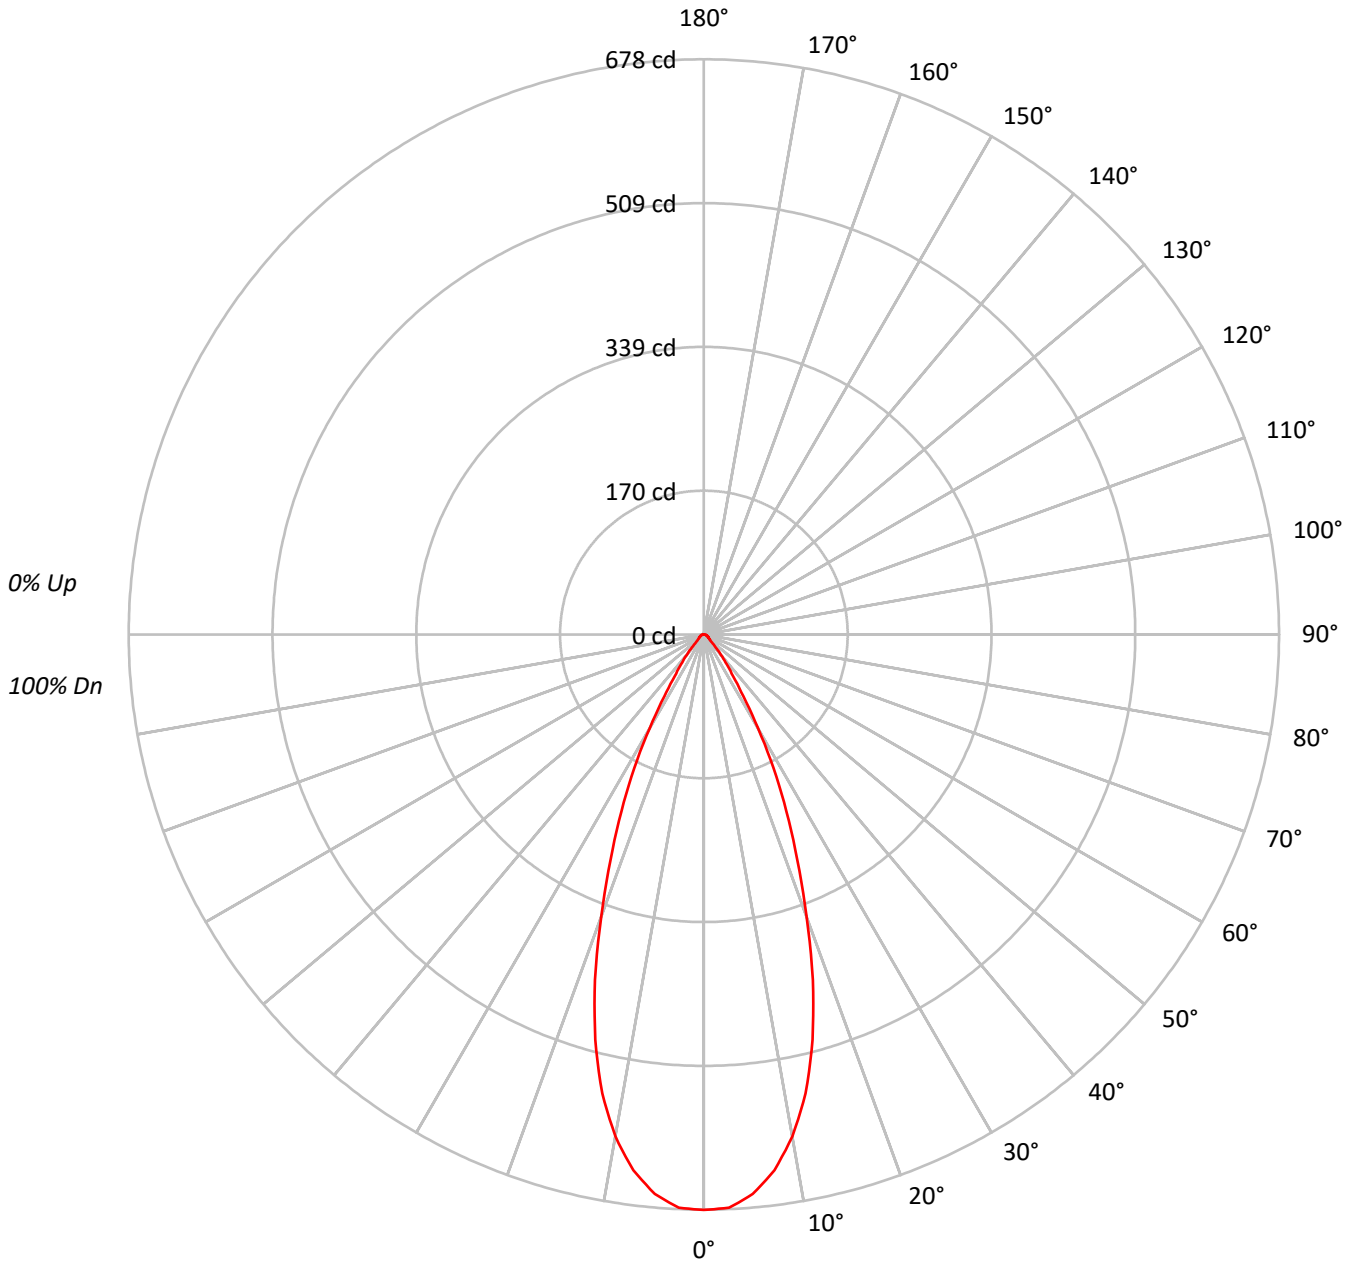



TEST NUMBER: P885693

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMWB-340LM-2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88			
3	104	98	93	89	102	96	92	88	94	90	87	91	88	86	89	87	84	83			
4	99	92	87	83	97	91	86	82	89	85	82	87	83	81	85	82	80	78			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	91	83	77	73	89	82	77	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	86	78	73	69	77	72	69	75	71	68	74	71	68	67			
8	83	75	69	66	82	74	69	65	73	68	65	72	68	65	71	67	65	63			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	62	60			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	66	62	59	58			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1338653
5°	1311673
10°	1203995
15°	1010343
20°	741580
25°	500186
30°	289414
35°	143350
40°	81153
45°	37679
50°	27633
55°	24774
60°	21314
65°	21014
70°	20773
75°	20588
80°	20457
85°	20379

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 37679 cd/sqm



TEST NUMBER: P885693

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMWB-340LM-2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	61.2	16.6
10°-20°	134.8	36.5
20°-30°	105.1	28.5
30°-40°	41.2	11.2
40°-50°	12.2	3.3
50°-60°	6.2	1.7
60°-70°	4.7	1.3
70°-80°	3.1	0.8
80°-90°	0.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	301.1	81.5
0°-40°	342.3	92.7
0°-60°	360.7	97.7
0°-90°	369.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	369.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	678	
5°	662	61
15°	494	135
25°	230	105
35°	60	41
45°	14	12
55°	7	6
65°	4	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P885693

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMWB-340LM-2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	678.3
2.5°	676.5
5°	662.1
7.5°	636.9
10°	600.8
12.5°	554.0
15°	494.5
17.5°	427.0
20°	353.1
22.5°	287.3
25°	229.7
27.5°	177.5
30°	127.0
32.5°	86.5
35°	59.5
37.5°	44.1
40°	31.5
42.5°	20.7
45°	13.5
47.5°	9.9
50°	9.0
52.5°	7.2
55°	7.2
57.5°	6.3
60°	5.4
62.5°	5.4
65°	4.5
67.5°	4.5
70°	3.6
72.5°	3.6
75°	2.7
77.5°	2.7
80°	1.8
82.5°	0.9
85°	0.9
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)