

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640633

Luminaire Tested: ML5612LSFL4097FS1E - 593TBZB - 1200LM - 3500K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P640633  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-31)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSFL4097FS1E - 593TBZB - 1200LM - 3500K  
Description: ML56 RR, 40D TIR OPTIC, 5" TUSCON BRONZE BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1550.4 lumens  
Efficiency: N/A  
Efficacy: 94.0 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 16.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P640633  
CATALOG NUMBER: ML5612LSFL4097FS1E - 593TBZB - 1200LM - 3500K

### Luminous Intensity Polar Plot

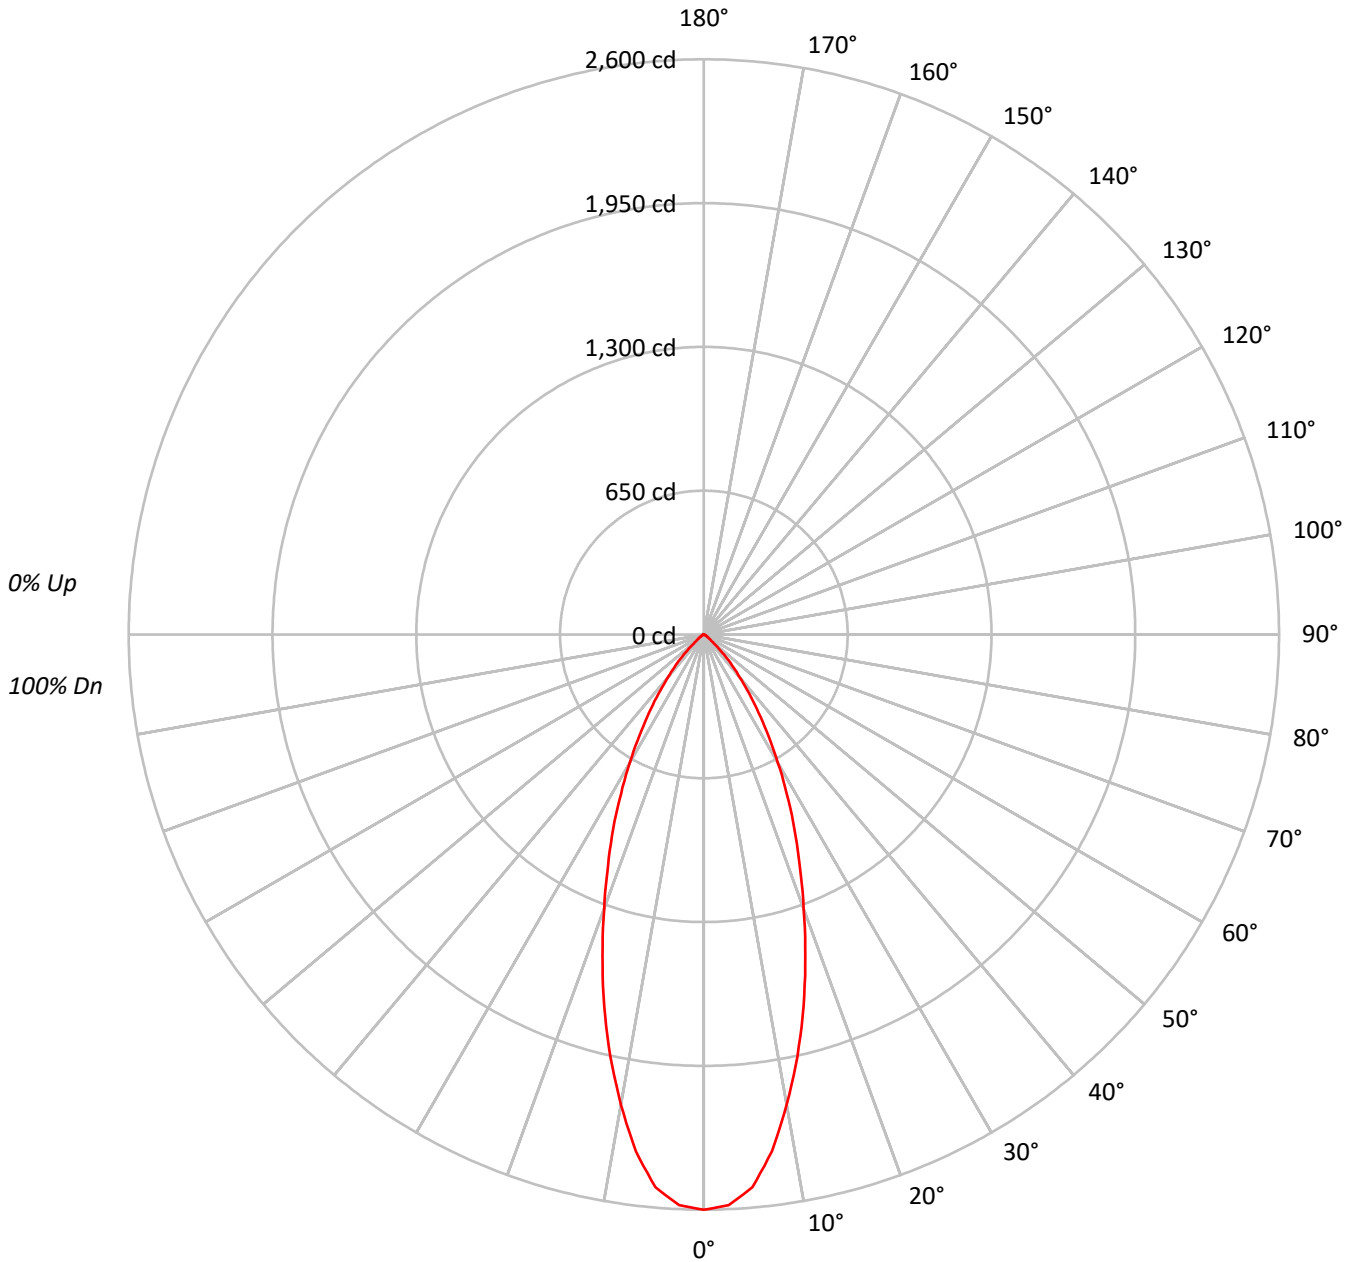



TEST NUMBER: P640633

CATALOG NUMBER: ML5612LSFL4097FS1E - 593TBZB - 1200LM - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 114 | 111 | 109 | 107 | 111 | 109 | 107 | 105 | 105 | 103 | 102 | 101 | 100 | 99  | 98  | 97  | 96  | 94  |    |    |   |
| 2   | 108 | 104 | 100 | 97  | 106 | 102 | 99  | 96  | 99  | 96  | 93  | 96  | 94  | 91  | 93  | 91  | 90  | 88  |    |    |   |
| 3   | 103 | 97  | 92  | 89  | 101 | 96  | 91  | 88  | 93  | 89  | 86  | 91  | 88  | 85  | 89  | 86  | 84  | 82  |    |    |   |
| 4   | 98  | 91  | 86  | 82  | 97  | 90  | 85  | 81  | 88  | 84  | 80  | 86  | 82  | 79  | 84  | 81  | 79  | 77  |    |    |   |
| 5   | 94  | 86  | 80  | 76  | 92  | 85  | 80  | 76  | 83  | 79  | 75  | 81  | 77  | 74  | 80  | 76  | 74  | 72  |    |    |   |
| 6   | 89  | 81  | 75  | 71  | 88  | 80  | 75  | 71  | 79  | 74  | 70  | 77  | 73  | 70  | 76  | 72  | 69  | 68  |    |    |   |
| 7   | 85  | 76  | 71  | 67  | 84  | 76  | 70  | 66  | 74  | 70  | 66  | 73  | 69  | 66  | 72  | 68  | 65  | 64  |    |    |   |
| 8   | 81  | 72  | 67  | 63  | 80  | 72  | 66  | 63  | 71  | 66  | 62  | 70  | 65  | 62  | 69  | 65  | 62  | 61  |    |    |   |
| 9   | 78  | 69  | 63  | 59  | 77  | 68  | 63  | 59  | 67  | 62  | 59  | 66  | 62  | 59  | 66  | 62  | 59  | 57  |    |    |   |
| 10  | 75  | 65  | 60  | 56  | 74  | 65  | 60  | 56  | 64  | 59  | 56  | 63  | 59  | 56  | 63  | 59  | 56  | 54  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 205270 |
| 5°  | 198756 |
| 10° | 172974 |
| 15° | 142129 |
| 20° | 110805 |
| 25° | 84375  |
| 30° | 60945  |
| 35° | 41564  |
| 40° | 25742  |
| 45° | 14491  |
| 50° | 5318   |
| 55° | 3069   |
| 60° | 1768   |
| 65° | 523    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14491 cd/sqm



TEST NUMBER: P640633

CATALOG NUMBER: ML5612LSFL4097FS1E - 593TBZB - 1200LM - 3500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 227.8  | 14.7      |
| 10°-20°   | 480.6  | 31.0      |
| 20°-30°   | 443.2  | 28.6      |
| 30°-40°   | 272.7  | 17.6      |
| 40°-50°   | 101.2  | 6.5       |
| 50°-60°   | 21.2   | 1.4       |
| 60°-70°   | 3.7    | 0.2       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1151.6 | 74.3      |
| 0°-40°    | 1424.3 | 91.9      |
| 0°-60°    | 1546.6 | 99.8      |
| 0°-90°    | 1550.4 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1550.4 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2600 |      |
| 5°  | 2508 | 228  |
| 15° | 1739 | 481  |
| 25° | 969  | 443  |
| 35° | 431  | 273  |
| 45° | 130  | 101  |
| 55° | 22   | 21   |
| 65° | 3    | 4    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P640633

CATALOG NUMBER: ML5612LSFL4097FS1E - 593TBZB - 1200LM - 3500K

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 2600.3 |
| 2.5°  | 2582.2 |
| 5°    | 2508.2 |
| 7.5°  | 2356.1 |
| 10°   | 2157.9 |
| 12.5° | 1952.7 |
| 15°   | 1739.1 |
| 17.5° | 1524.2 |
| 20°   | 1319.0 |
| 22.5° | 1132.0 |
| 25°   | 968.7  |
| 27.5° | 810.9  |
| 30°   | 668.6  |
| 32.5° | 541.6  |
| 35°   | 431.3  |
| 37.5° | 336.4  |
| 40°   | 249.8  |
| 42.5° | 188.4  |
| 45°   | 129.8  |
| 47.5° | 69.8   |
| 50°   | 43.3   |
| 52.5° | 30.7   |
| 55°   | 22.3   |
| 57.5° | 15.4   |
| 60°   | 11.2   |
| 62.5° | 7.0    |
| 65°   | 2.8    |
| 67.5° | 0.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)