

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640923

Luminaire Tested: ML5612LSNFL2597FS1E - 592SC - 600LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640923
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 592SC - 600LM - 3500K
Description: ML56 RR, 25D TIR OPTIC, 5" SPECULAR CLEAR TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 956.0 lumens
Efficiency: N/A
Efficacy: 92.8 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.48
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640923

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592SC - 600LM - 3500K

Luminous Intensity Polar Plot

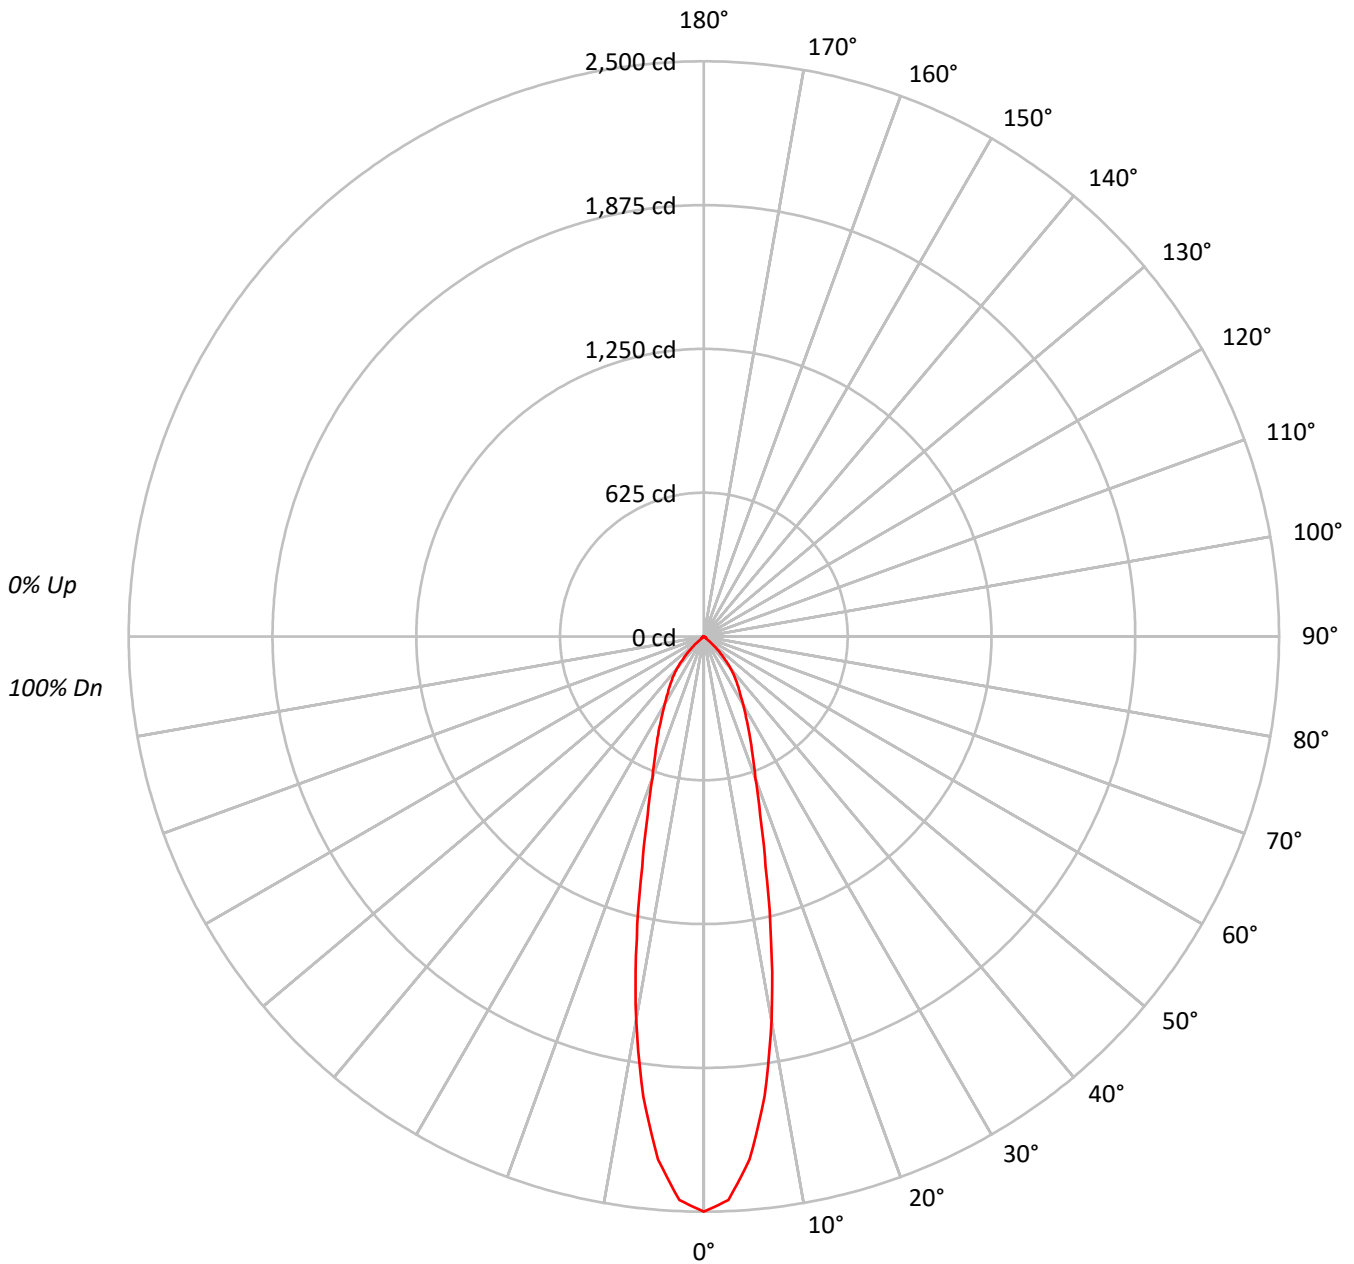



TEST NUMBER: P640923

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592SC - 600LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94			
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89			
3	104	98	93	90	102	97	92	89	94	91	88	92	89	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	79			
5	95	87	82	78	93	86	81	78	85	80	77	83	79	76	81	78	76	74			
6	91	83	77	73	89	82	77	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	86	78	73	69	77	72	69	75	71	68	74	71	68	67			
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	62	59	58			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	197352
5°	180800
10°	135837
15°	84562
20°	54823
25°	40955
30°	30974
35°	24516
40°	18714
45°	10840
50°	2874
55°	1239
60°	853
65°	336
70°	208
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10840 cd/sqm



TEST NUMBER: P640923

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592SC - 600LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	198.7	20.8
10°-20°	294.3	30.8
20°-30°	217.3	22.7
30°-40°	159.4	16.7
40°-50°	74.2	7.8
50°-60°	9.8	1.0
60°-70°	2.3	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	710.3	74.3
0°-40°	869.6	91.0
0°-60°	953.6	99.7
0°-90°	956.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	956.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2500	
5°	2282	199
15°	1035	294
25°	470	217
35°	254	159
45°	97	74
55°	9	10
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640923

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592SC - 600LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2500.0
2.5°	2451.5
5°	2281.6
7.5°	2016.4
10°	1694.6
12.5°	1348.4
15°	1034.7
17.5°	810.9
20°	652.6
22.5°	550.2
25°	470.2
27.5°	397.3
30°	339.8
32.5°	292.2
35°	254.4
37.5°	219.3
40°	181.6
42.5°	137.5
45°	97.1
47.5°	54.8
50°	23.4
52.5°	13.5
55°	9.0
57.5°	7.2
60°	5.4
62.5°	3.6
65°	1.8
67.5°	0.9
70°	0.9
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)