

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641101

Luminaire Tested: ML5612LSNFL2597FS1E - 692SC - 600LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641101
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 692SC - 600LM - 2700K
Description: ML56 RR, 25D TIR OPTIC, 6" SPECULAR CLEAR TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 917.6 lumens
Efficiency: N/A
Efficacy: 89.1 lumens/watt
Spacing Criteria (0/90/45): 0.37 / 0.37 / 0.39
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641101

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692SC - 600LM - 2700K

Luminous Intensity Polar Plot

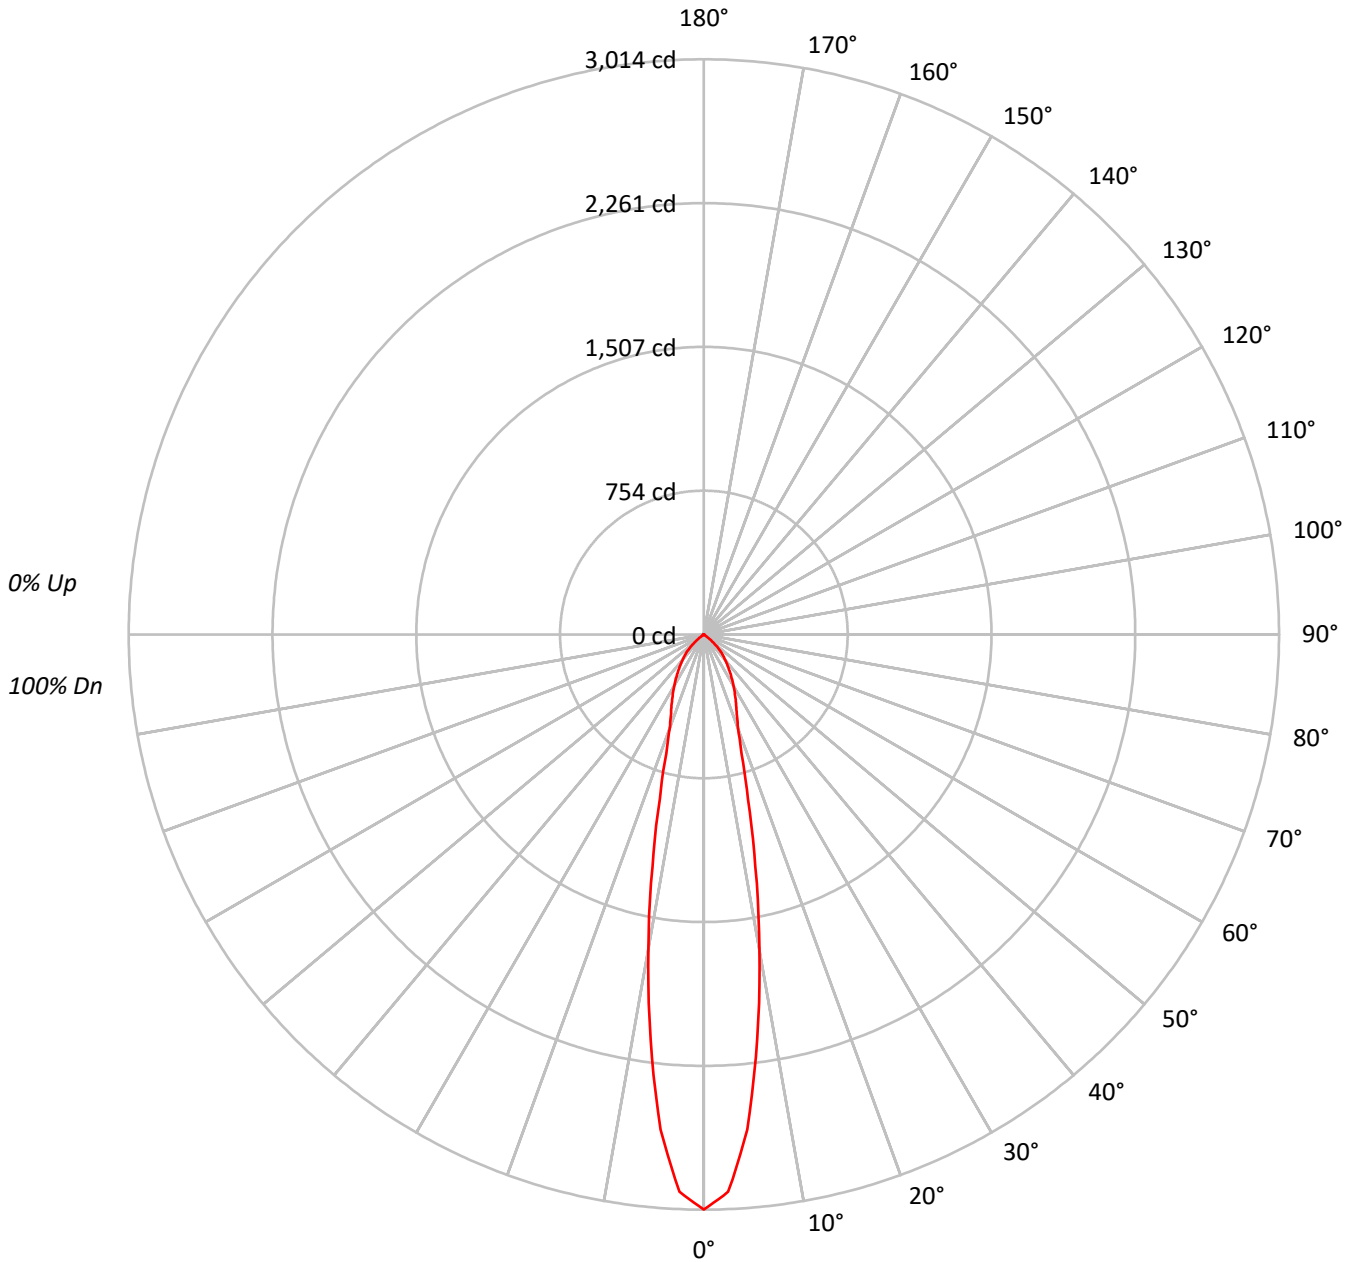



TEST NUMBER: P641101

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692SC - 600LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	89			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	83	81	85	82	80	78			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66			
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	66	62	59	58			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	165201
5°	143314
10°	93251
15°	50602
20°	30377
25°	24086
30°	19604
35°	15714
40°	12359
45°	9435
50°	4861
55°	1137
60°	658
65°	337
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 9435 cd/sqm



TEST NUMBER: P641101

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692SC - 600LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	217.6	23.7
10°-20°	258.9	28.2
20°-30°	184.2	20.1
30°-40°	147.5	16.1
40°-50°	90.0	9.8
50°-60°	16.8	1.8
60°-70°	2.6	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	660.7	72.0
0°-40°	808.2	88.1
0°-60°	915.0	99.7
0°-90°	917.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	917.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3014	
5°	2604	218
15°	892	259
25°	398	184
35°	235	147
45°	122	90
55°	12	17
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641101

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692SC - 600LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3013.5
2.5°	2923.3
5°	2604.3
7.5°	2138.0
10°	1675.2
12.5°	1246.4
15°	891.6
17.5°	655.1
20°	520.7
22.5°	450.1
25°	398.2
27.5°	352.2
30°	309.7
32.5°	271.4
35°	234.8
37.5°	202.5
40°	172.7
42.5°	147.2
45°	121.7
47.5°	87.6
50°	57.0
52.5°	25.5
55°	11.9
57.5°	7.7
60°	6.0
62.5°	4.3
65°	2.6
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)