

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641276

Luminaire Tested: ML5612LSVWFL7597FS1E - 592W - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641276
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 592W - 1200LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 5" WHITE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1423.8 lumens
Efficiency: N/A
Efficacy: 86.3 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641276

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592W - 1200LM - 2700K

Luminous Intensity Polar Plot

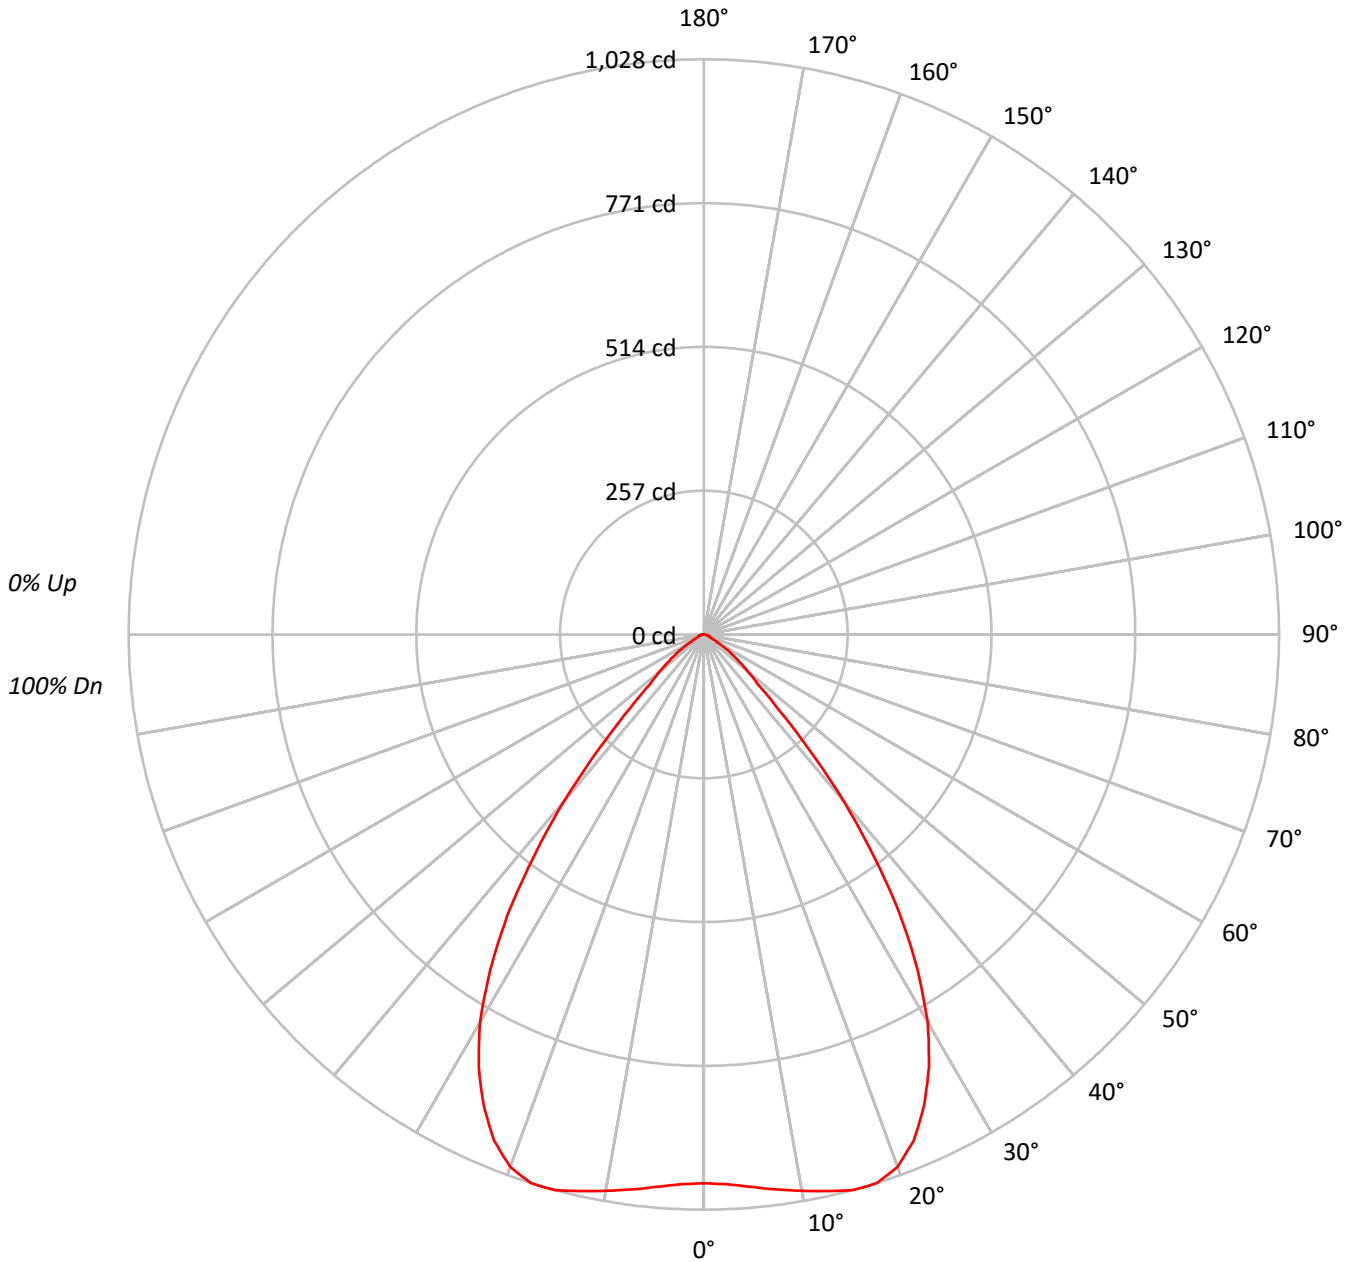



TEST NUMBER: P641276

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592W - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92			92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	87	85	84			84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76			76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70			70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64			64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	61	68	64	60	58			58
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54			54
8	74	63	57	52	73	63	56	52	62	56	52	61	55	51	59	55	51	50			50
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	48	46			46
10	66	55	49	45	65	55	49	45	54	48	44	53	48	44	52	48	44	43			43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	77425
5°	78553
10°	80944
15°	84038
20°	85049
25°	81057
30°	72913
35°	58901
40°	39994
45°	20776
50°	12649
55°	8354
60°	4373
65°	2466
70°	2447
75°	2410
80°	2409
85°	2355

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20776 cd/sqm



TEST NUMBER: P641276

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592W - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.2	6.7
10°-20°	289.7	20.4
20°-30°	423.8	29.8
30°-40°	373.9	26.3
40°-50°	159.0	11.2
50°-60°	55.2	3.9
60°-70°	15.8	1.1
70°-80°	8.4	0.6
80°-90°	2.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	808.7	56.8
0°-40°	1182.6	83.1
0°-60°	1396.8	98.1
0°-90°	1423.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1423.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	981	
5°	991	95
15°	1028	290
25°	931	424
35°	611	374
45°	186	159
55°	61	55
65°	13	16
75°	8	8
85°	3	3
90°	0	



TEST NUMBER: P641276

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592W - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	980.8
2.5°	983.4
5°	991.3
7.5°	1000.6
10°	1009.8
12.5°	1019.0
15°	1028.3
17.5°	1028.3
20°	1012.4
22.5°	979.4
25°	930.6
27.5°	871.2
30°	799.9
32.5°	710.2
35°	611.2
37.5°	497.6
40°	388.1
42.5°	275.9
45°	186.1
47.5°	129.4
50°	103.0
52.5°	79.2
55°	60.7
57.5°	43.6
60°	27.7
62.5°	19.8
65°	13.2
67.5°	11.9
70°	10.6
72.5°	9.2
75°	7.9
77.5°	6.6
80°	5.3
82.5°	4.0
85°	2.6
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)