

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641496

Luminaire Tested: ML5612LSVWFL7597FS1E - 693SNB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641496
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-88)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 693SNB - 900LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 6" SATIN NICKLE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1171.8 lumens
Efficiency: N/A
Efficacy: 88.1 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641496

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693SNB - 900LM - 2700K

Luminous Intensity Polar Plot

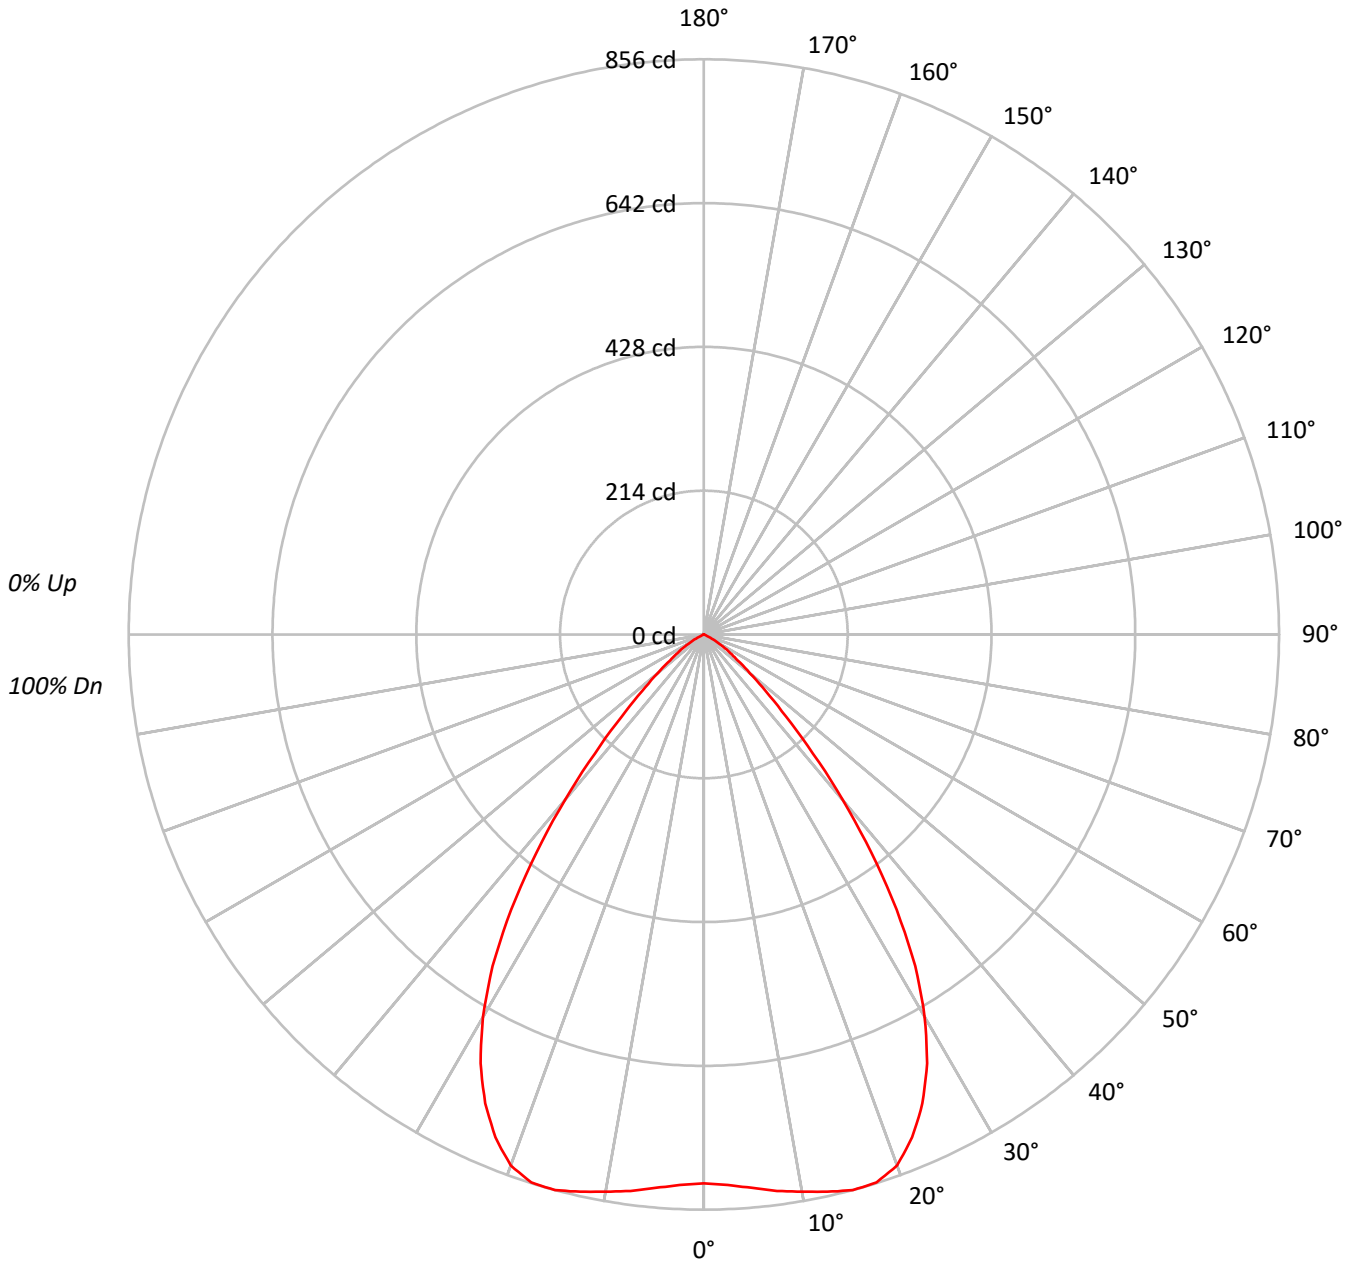



TEST NUMBER: P641496

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693SNB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	94	86	80	75	92	85	79	75	83	78	74	81	76	73	79	75	72	70	70	70	70
5	89	80	73	68	87	79	72	68	77	71	67	75	70	67	73	69	66	64	64	64	64
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	68	64	61	59	59	59	59
7	79	68	62	57	77	68	61	57	66	61	57	65	60	56	64	59	56	54	54	54	54
8	74	64	57	53	73	63	57	52	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	51	48	46	46	46	46
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	45	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	44772
5°	45487
10°	46865
15°	48581
20°	49051
25°	46563
30°	41608
35°	33468
40°	22972
45°	13373
50°	7633
55°	4588
60°	2511
65°	713
70°	176
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13373 cd/sqm



TEST NUMBER: P641496

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693SNB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.4	6.8
10°-20°	241.1	20.6
20°-30°	350.3	29.9
30°-40°	307.4	26.2
40°-50°	141.3	12.1
50°-60°	44.9	3.8
60°-70°	7.2	0.6
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	670.9	57.3
0°-40°	978.3	83.5
0°-60°	1164.4	99.4
0°-90°	1171.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1171.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	817	
5°	827	79
15°	856	241
25°	770	350
35°	500	307
45°	172	141
55°	48	45
65°	6	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641496

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693SNB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	816.7
2.5°	820.0
5°	826.6
7.5°	835.3
10°	841.9
12.5°	849.5
15°	856.0
17.5°	855.0
20°	840.8
22.5°	810.2
25°	769.8
27.5°	719.6
30°	657.3
32.5°	585.3
35°	500.1
37.5°	409.5
40°	321.0
42.5°	240.2
45°	172.5
47.5°	124.5
50°	89.5
52.5°	63.3
55°	48.0
57.5°	34.9
60°	22.9
62.5°	10.9
65°	5.5
67.5°	1.1
70°	1.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)