

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641656

Luminaire Tested: ML5612LSVWFL97FS1E - 593SNB - 600LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641656
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-99)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 593SNB - 600LM - 2700K
Description: ML56 RR, MILKY OPTIC, 5" SATIN NICKLE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 713.2 lumens
Efficiency: N/A
Efficacy: 69.2 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.14
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641656
CATALOG NUMBER: ML5612LSVWFL97FS1E - 593SNB - 600LM - 2700K

Luminous Intensity Polar Plot

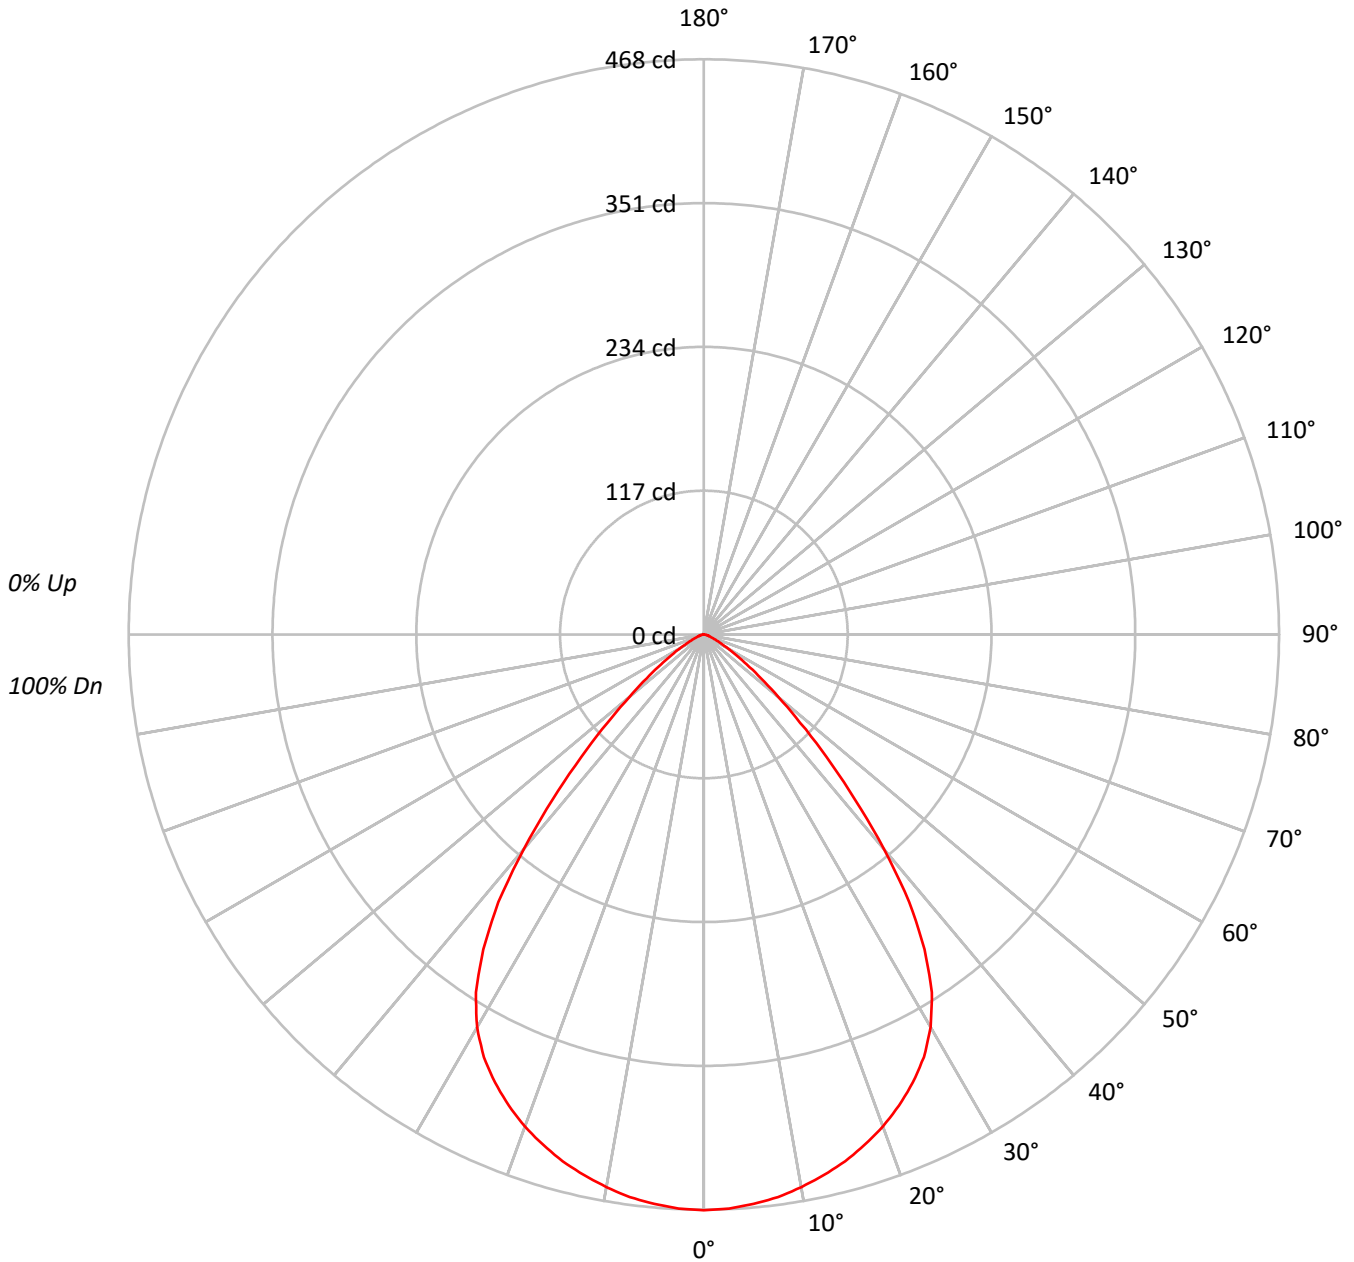



TEST NUMBER: P641656

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593SNB - 600LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82			
3	99	91	85	81	97	90	84	80	87	82	79	84	81	77	82	79	76	74			
4	93	84	77	72	91	82	76	72	80	75	71	78	73	70	76	72	69	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61			
6	81	71	64	59	80	70	63	58	68	62	58	67	62	58	65	61	57	55			
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51			
8	72	61	54	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46			
9	68	56	50	45	66	56	49	45	55	49	45	54	48	44	53	48	44	43			
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	36984
5°	36856
10°	36600
15°	36270
20°	35787
25°	35032
30°	33636
35°	30154
40°	23485
45°	15752
50°	9714
55°	5849
60°	3489
65°	2073
70°	1177
75°	1037
80°	773
85°	815

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15752 cd/sqm



TEST NUMBER: P641656

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593SNB - 600LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.1	6.2
10°-20°	125.1	17.5
20°-30°	184.7	25.9
30°-40°	191.6	26.9
40°-50°	111.3	15.6
50°-60°	40.4	5.7
60°-70°	11.7	1.6
70°-80°	3.6	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	353.9	49.6
0°-40°	545.5	76.5
0°-60°	697.2	97.7
0°-90°	713.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	713.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	468	
5°	465	44
15°	444	125
25°	402	185
35°	313	192
45°	141	111
55°	42	40
65°	11	12
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P641656

CATALOG NUMBER: ML5612LSVWFL97FS1E - 593SNB - 600LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	468.5
2.5°	467.6
5°	465.1
7.5°	461.7
10°	456.6
12.5°	450.6
15°	443.8
17.5°	435.3
20°	426.0
22.5°	414.9
25°	402.2
27.5°	387.7
30°	369.0
32.5°	345.2
35°	312.9
37.5°	274.6
40°	227.9
42.5°	181.9
45°	141.1
47.5°	106.3
50°	79.1
52.5°	58.7
55°	42.5
57.5°	30.6
60°	22.1
62.5°	15.3
65°	11.1
67.5°	7.7
70°	5.1
72.5°	4.3
75°	3.4
77.5°	2.6
80°	1.7
82.5°	0.9
85°	0.9
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)