

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641710

Luminaire Tested: ML5612LSVWFL97FS1E - 594SNB - 900LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641710
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-102)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 594SNB - 900LM - 5000K
Description: ML56 RR, MILKY OPTIC, 5" SATIN NICKLE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1338.8 lumens
Efficiency: N/A
Efficacy: 100.7 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.26
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641710
CATALOG NUMBER: ML5612LSVWFL97FS1E - 594SNB - 900LM - 5000K

Luminous Intensity Polar Plot

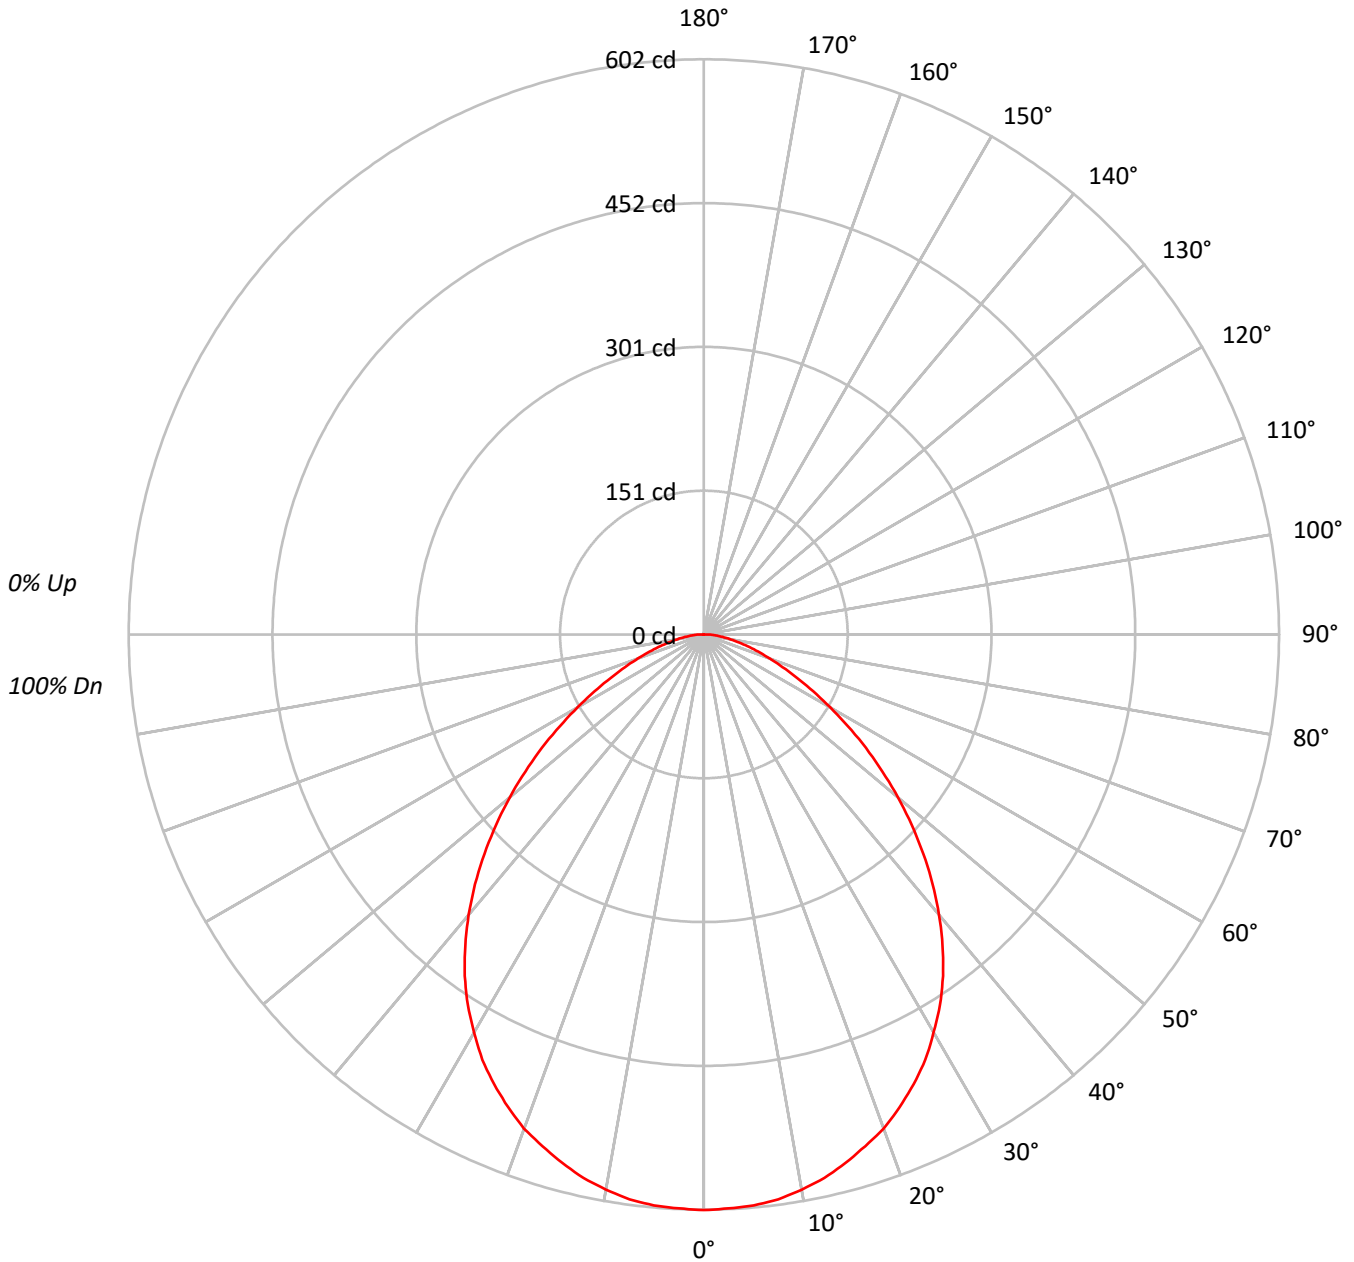



TEST NUMBER: P641710

CATALOG NUMBER: ML5612LSVWFL97FS1E - 594SNB - 900LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			87
2	101	94	88	83	99	92	87	82	89	84	80	85	82	78	83	79	76	74			74
3	93	84	76	70	91	82	75	70	79	73	69	77	72	67	74	70	66	64			64
4	86	75	67	61	84	74	66	60	71	65	60	69	63	59	67	62	58	56			56
5	80	68	59	53	78	67	59	53	65	58	52	63	57	52	61	56	51	49			49
6	74	61	53	47	72	60	53	47	59	52	46	57	51	46	56	50	46	44			44
7	69	56	48	42	67	55	47	42	54	47	42	52	46	41	51	45	41	39			39
8	64	51	43	38	63	51	43	38	49	42	37	48	42	37	47	41	37	35			35
9	60	47	39	34	59	47	39	34	46	39	34	45	38	34	44	38	34	32			32
10	56	44	36	31	55	43	36	31	42	36	31	41	35	31	41	35	31	29			29

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	47554
5°	47538
10°	47294
15°	46804
20°	46229
25°	45241
30°	43836
35°	42046
40°	39468
45°	36260
50°	32582
55°	28489
60°	24077
65°	20136
70°	16872
75°	14366
80°	12411
85°	12318

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 36260 cd/sqm



TEST NUMBER: P641710

CATALOG NUMBER: ML5612LSVWFL97FS1E - 594SNB - 900LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.9	4.3
10°-20°	161.5	12.1
20°-30°	238.9	17.8
30°-40°	271.8	20.3
40°-50°	250.1	18.7
50°-60°	185.2	13.8
60°-70°	108.4	8.1
70°-80°	50.8	3.8
80°-90°	15.2	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	457.3	34.2
0°-40°	729.1	54.5
0°-60°	1164.5	87.0
0°-90°	1338.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1338.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	602	
5°	600	57
15°	573	161
25°	519	239
35°	436	272
45°	325	250
55°	207	185
65°	108	108
75°	47	51
85°	14	15
90°	0	



TEST NUMBER: P641710

CATALOG NUMBER: ML5612LSVWFL97FS1E - 594SNB - 900LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	602.4
2.5°	601.2
5°	599.9
7.5°	596.2
10°	590.0
12.5°	582.6
15°	572.7
17.5°	561.5
20°	550.3
22.5°	535.5
25°	519.4
27.5°	502.0
30°	480.9
32.5°	459.9
35°	436.3
37.5°	410.3
40°	383.0
42.5°	354.5
45°	324.8
47.5°	295.0
50°	265.3
52.5°	235.5
55°	207.0
57.5°	178.5
60°	152.5
62.5°	128.9
65°	107.8
67.5°	89.2
70°	73.1
72.5°	59.5
75°	47.1
77.5°	35.9
80°	27.3
82.5°	19.8
85°	13.6
87.5°	8.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)