

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641725

Luminaire Tested: ML5612LSVWFL97FS1E - 594TBZB - 900LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641725
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-103)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 594TBZB - 900LM - 5000K
Description: ML56 RR, MILKY OPTIC, 5" TUSCON BRONZE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1322.7 lumens
Efficiency: N/A
Efficacy: 99.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.27
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641725
CATALOG NUMBER: ML5612LSVWFL97FS1E - 594TBZB - 900LM - 5000K

Luminous Intensity Polar Plot

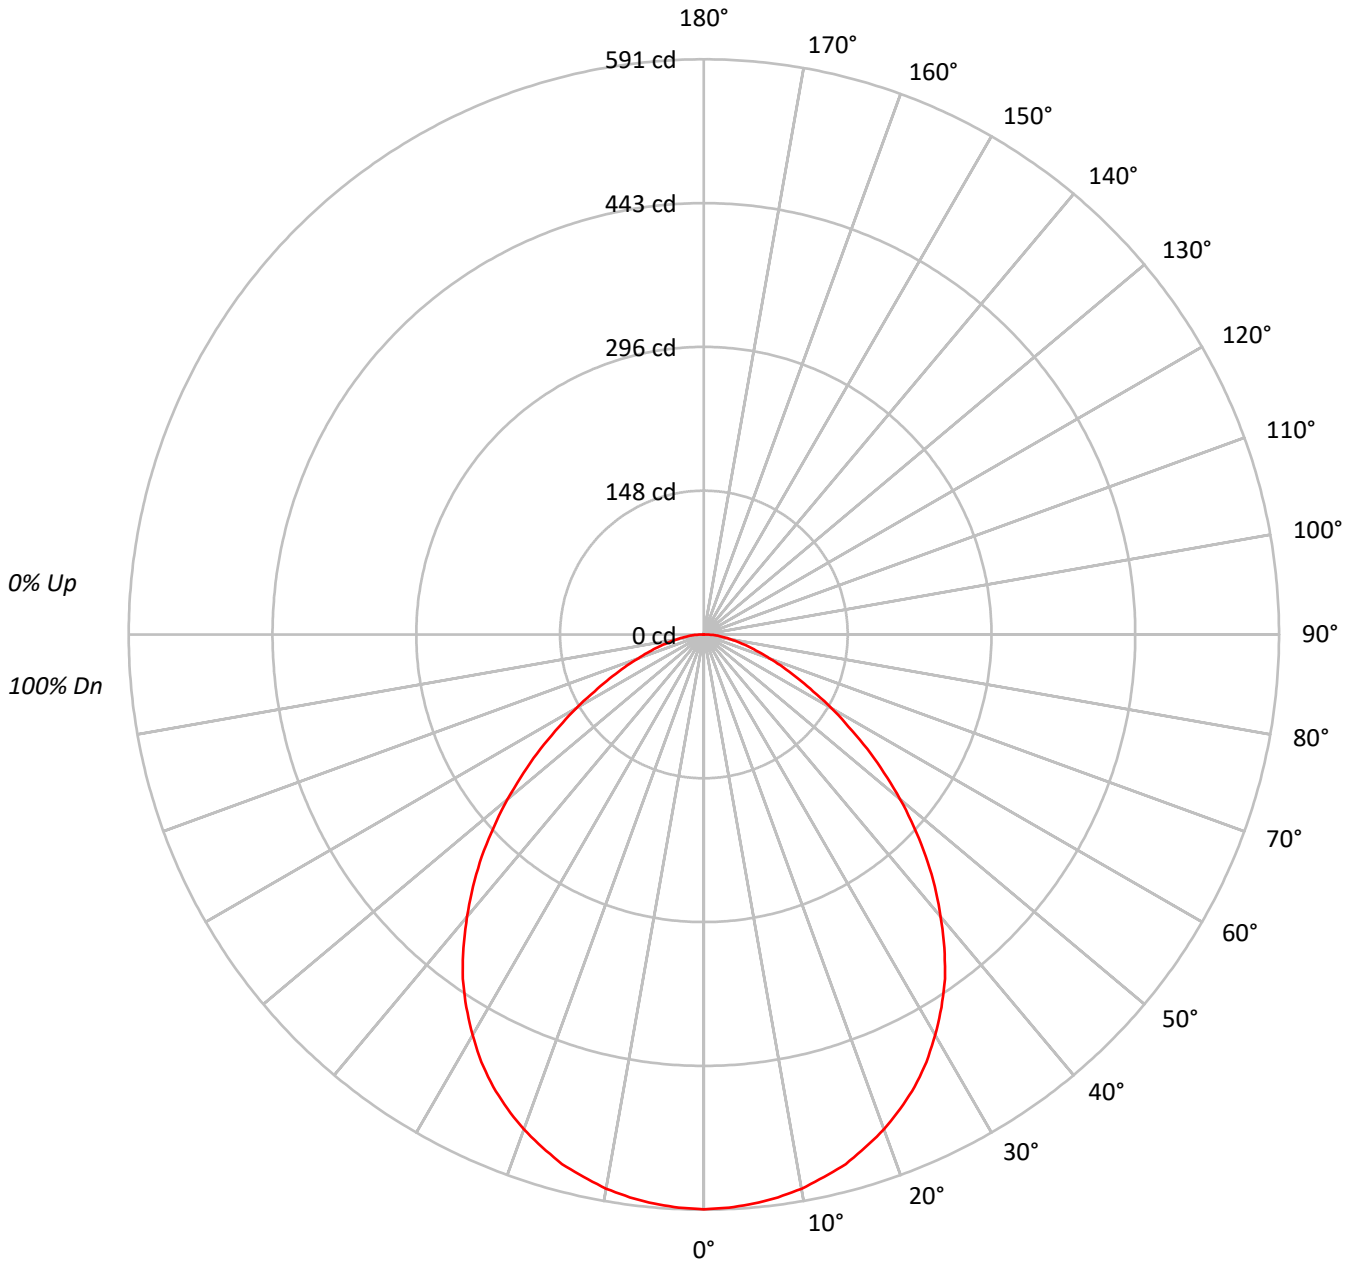



TEST NUMBER: P641725

CATALOG NUMBER: ML5612LSVWFL97FS1E - 594TBZB - 900LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | 100 |
| 1 | 110 | 106 | 102 | 99 | 107 | 104 | 100 | 97 | 100 | 97 | 94 | 96 | 93 | 91 | 92 | 90 | 89 | 87 | | | 87 |
| 2 | 101 | 94 | 88 | 83 | 99 | 92 | 87 | 82 | 89 | 84 | 80 | 85 | 82 | 78 | 82 | 79 | 76 | 74 | | | 74 |
| 3 | 93 | 84 | 76 | 70 | 91 | 82 | 75 | 70 | 79 | 73 | 69 | 77 | 72 | 67 | 74 | 70 | 66 | 64 | | | 64 |
| 4 | 86 | 75 | 67 | 61 | 84 | 74 | 66 | 60 | 71 | 65 | 60 | 69 | 63 | 59 | 67 | 62 | 58 | 56 | | | 56 |
| 5 | 79 | 68 | 59 | 53 | 77 | 67 | 59 | 53 | 64 | 58 | 52 | 63 | 57 | 52 | 61 | 55 | 51 | 49 | | | 49 |
| 6 | 74 | 61 | 53 | 47 | 72 | 60 | 52 | 47 | 59 | 52 | 46 | 57 | 51 | 46 | 55 | 50 | 46 | 44 | | | 44 |
| 7 | 69 | 56 | 48 | 42 | 67 | 55 | 47 | 42 | 54 | 47 | 41 | 52 | 46 | 41 | 51 | 45 | 41 | 39 | | | 39 |
| 8 | 64 | 51 | 43 | 38 | 63 | 51 | 43 | 38 | 49 | 42 | 37 | 48 | 42 | 37 | 47 | 41 | 37 | 35 | | | 35 |
| 9 | 60 | 47 | 39 | 34 | 59 | 47 | 39 | 34 | 46 | 39 | 34 | 44 | 38 | 34 | 43 | 38 | 34 | 32 | | | 32 |
| 10 | 56 | 44 | 36 | 31 | 55 | 43 | 36 | 31 | 42 | 36 | 31 | 41 | 35 | 31 | 40 | 35 | 31 | 29 | | | 29 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 46630 |
| 5° | 46515 |
| 10° | 46356 |
| 15° | 46044 |
| 20° | 45456 |
| 25° | 44648 |
| 30° | 43325 |
| 35° | 41622 |
| 40° | 39004 |
| 45° | 36026 |
| 50° | 32311 |
| 55° | 28186 |
| 60° | 23903 |
| 65° | 19931 |
| 70° | 16618 |
| 75° | 14396 |
| 80° | 12411 |
| 85° | 12409 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 36026 cd/sqm



TEST NUMBER: P641725

CATALOG NUMBER: ML5612LSVWFL97FS1E - 594TBZB - 900LM - 5000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 55.8 | 4.2 |
| 10°-20° | 158.7 | 12.0 |
| 20°-30° | 235.6 | 17.8 |
| 30°-40° | 268.8 | 20.3 |
| 40°-50° | 248.1 | 18.8 |
| 50°-60° | 183.3 | 13.9 |
| 60°-70° | 107.0 | 8.1 |
| 70°-80° | 50.4 | 3.8 |
| 80°-90° | 15.2 | 1.2 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 450.0 | 34.0 |
| 0°-40° | 718.7 | 54.3 |
| 0°-60° | 1150.1 | 87.0 |
| 0°-90° | 1322.7 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1322.7 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 591 | |
| 5° | 587 | 56 |
| 15° | 563 | 159 |
| 25° | 513 | 236 |
| 35° | 432 | 269 |
| 45° | 323 | 248 |
| 55° | 205 | 183 |
| 65° | 107 | 107 |
| 75° | 47 | 50 |
| 85° | 14 | 15 |
| 90° | 0 | |



TEST NUMBER: P641725

CATALOG NUMBER: ML5612LSVWFL97FS1E - 594TBZB - 900LM - 5000K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|-------|
| 0° | 590.7 |
| 2.5° | 589.5 |
| 5° | 587.0 |
| 7.5° | 583.3 |
| 10° | 578.3 |
| 12.5° | 570.9 |
| 15° | 563.4 |
| 17.5° | 552.3 |
| 20° | 541.1 |
| 22.5° | 527.4 |
| 25° | 512.6 |
| 27.5° | 495.2 |
| 30° | 475.3 |
| 32.5° | 454.2 |
| 35° | 431.9 |
| 37.5° | 405.8 |
| 40° | 378.5 |
| 42.5° | 351.2 |
| 45° | 322.7 |
| 47.5° | 292.9 |
| 50° | 263.1 |
| 52.5° | 233.3 |
| 55° | 204.8 |
| 57.5° | 176.2 |
| 60° | 151.4 |
| 62.5° | 126.6 |
| 65° | 106.7 |
| 67.5° | 88.1 |
| 70° | 72.0 |
| 72.5° | 58.3 |
| 75° | 47.2 |
| 77.5° | 36.0 |
| 80° | 27.3 |
| 82.5° | 19.9 |
| 85° | 13.7 |
| 87.5° | 8.7 |
| 90° | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)