

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641757

Luminaire Tested: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641757
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-105)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3000K
Description: ML56 RR, MILKY OPTIC, 6" DEADFRONT TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1427.7 lumens
Efficiency: N/A
Efficacy: 86.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.28
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641757
CATALOG NUMBER: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3000K

Luminous Intensity Polar Plot

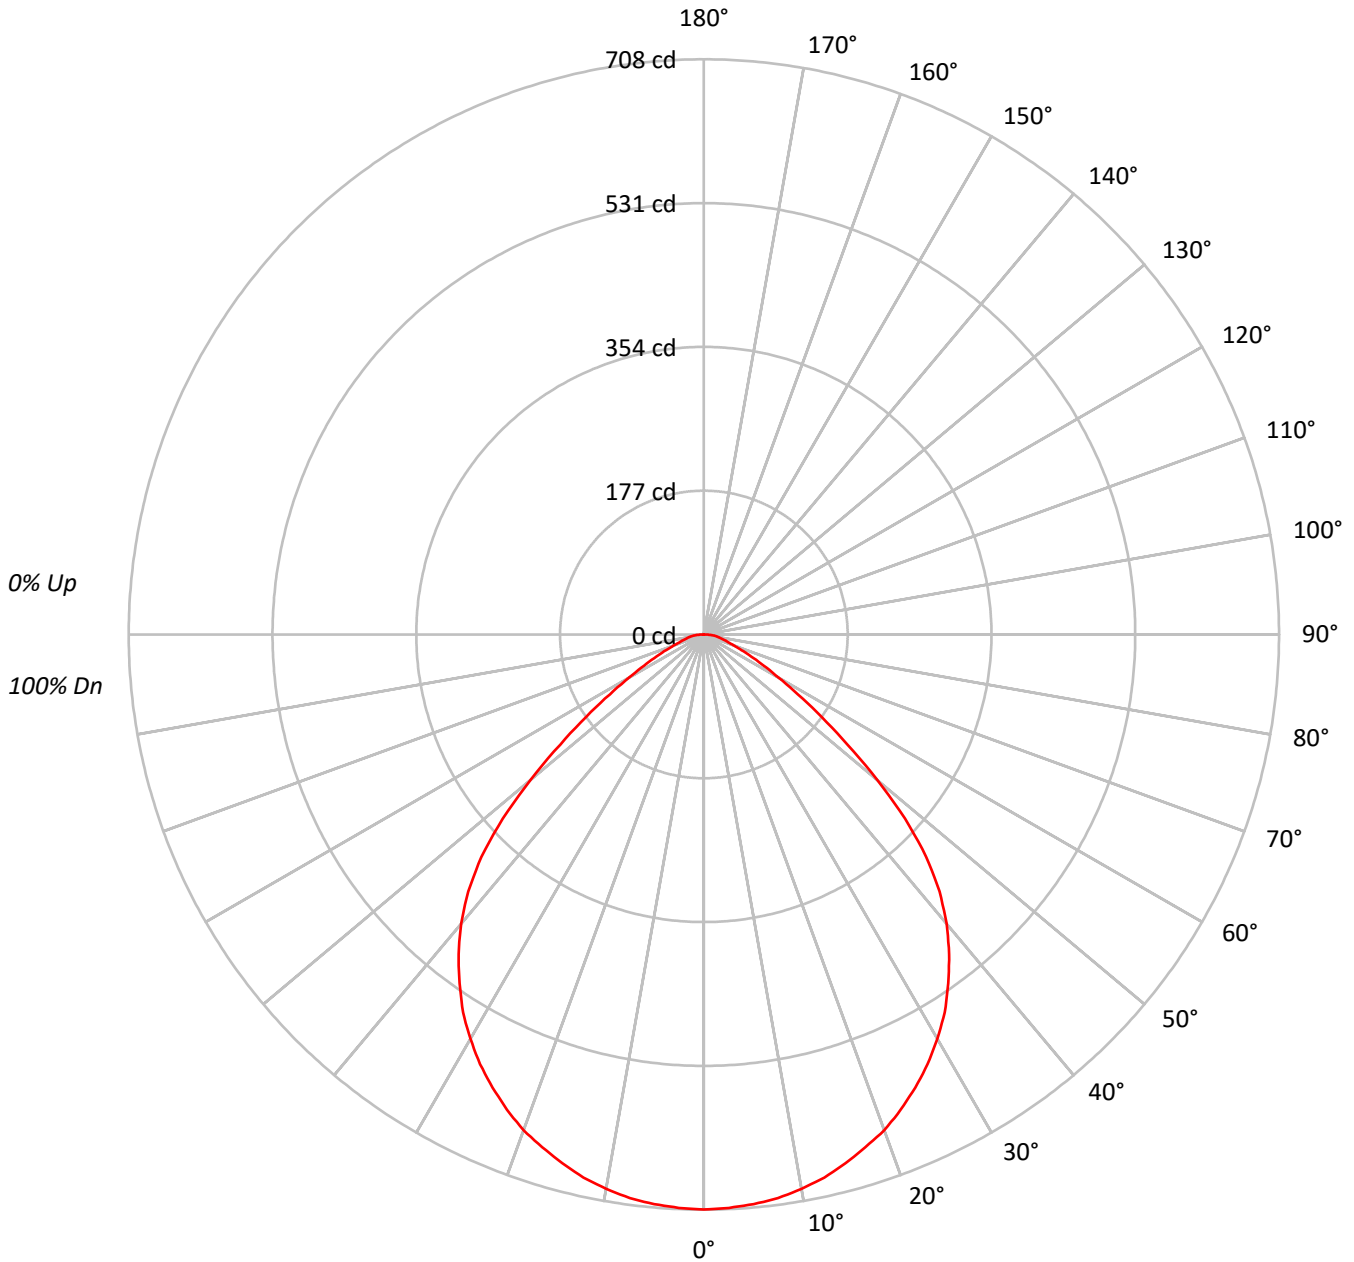



TEST NUMBER: P641757

CATALOG NUMBER: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89																			
2	103	96	91	86	101	94	89	85	91	87	83	88	84	81	85	82	80	78																			
3	95	87	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68																			
4	88	78	71	65	86	77	70	64	75	68	64	72	67	63	70	66	62	60																			
5	82	71	63	57	80	70	62	57	68	61	56	66	60	56	64	59	55	53																			
6	76	65	57	51	75	64	56	51	62	55	50	60	54	50	59	54	50	48																			
7	71	59	51	46	70	58	51	46	57	50	45	55	49	45	54	49	45	43																			
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	40	39																			
9	62	50	43	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35																			
10	59	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	38802
5°	38730
10°	38571
15°	38247
20°	37885
25°	37224
30°	36379
35°	35094
40°	33248
45°	30019
50°	23752
55°	16879
60°	11622
65°	8289
70°	6315
75°	5465
80°	5588
85°	5975

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 30019 cd/sqm



TEST NUMBER: P641757

CATALOG NUMBER: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.9	4.7
10°-20°	190.1	13.3
20°-30°	283.3	19.8
30°-40°	327.1	22.9
40°-50°	293.0	20.5
50°-60°	162.0	11.3
60°-70°	66.5	4.7
70°-80°	28.3	2.0
80°-90°	10.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	540.2	37.8
0°-40°	867.4	60.8
0°-60°	1322.4	92.6
0°-90°	1427.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1427.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	708	
5°	704	67
15°	674	190
25°	615	283
35°	524	327
45°	387	293
55°	177	162
65°	64	67
75°	26	28
85°	10	11
90°	0	



TEST NUMBER: P641757

CATALOG NUMBER: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	707.8
2.5°	706.5
5°	703.8
7.5°	699.7
10°	692.9
12.5°	684.7
15°	673.9
17.5°	661.6
20°	649.4
22.5°	633.1
25°	615.4
27.5°	596.4
30°	574.7
32.5°	551.6
35°	524.4
37.5°	495.9
40°	464.6
42.5°	429.3
45°	387.2
47.5°	335.6
50°	278.5
52.5°	222.8
55°	176.6
57.5°	137.2
60°	106.0
62.5°	82.9
65°	63.9
67.5°	50.3
70°	39.4
72.5°	31.2
75°	25.8
77.5°	21.7
80°	17.7
82.5°	14.9
85°	9.5
87.5°	5.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)