

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641758

Luminaire Tested: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641758
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-105)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3500K
Description: ML56 RR, MILKY OPTIC, 6" DEADFRONT TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1466.6 lumens
Efficiency: N/A
Efficacy: 88.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.28
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641758
CATALOG NUMBER: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3500K

Luminous Intensity Polar Plot

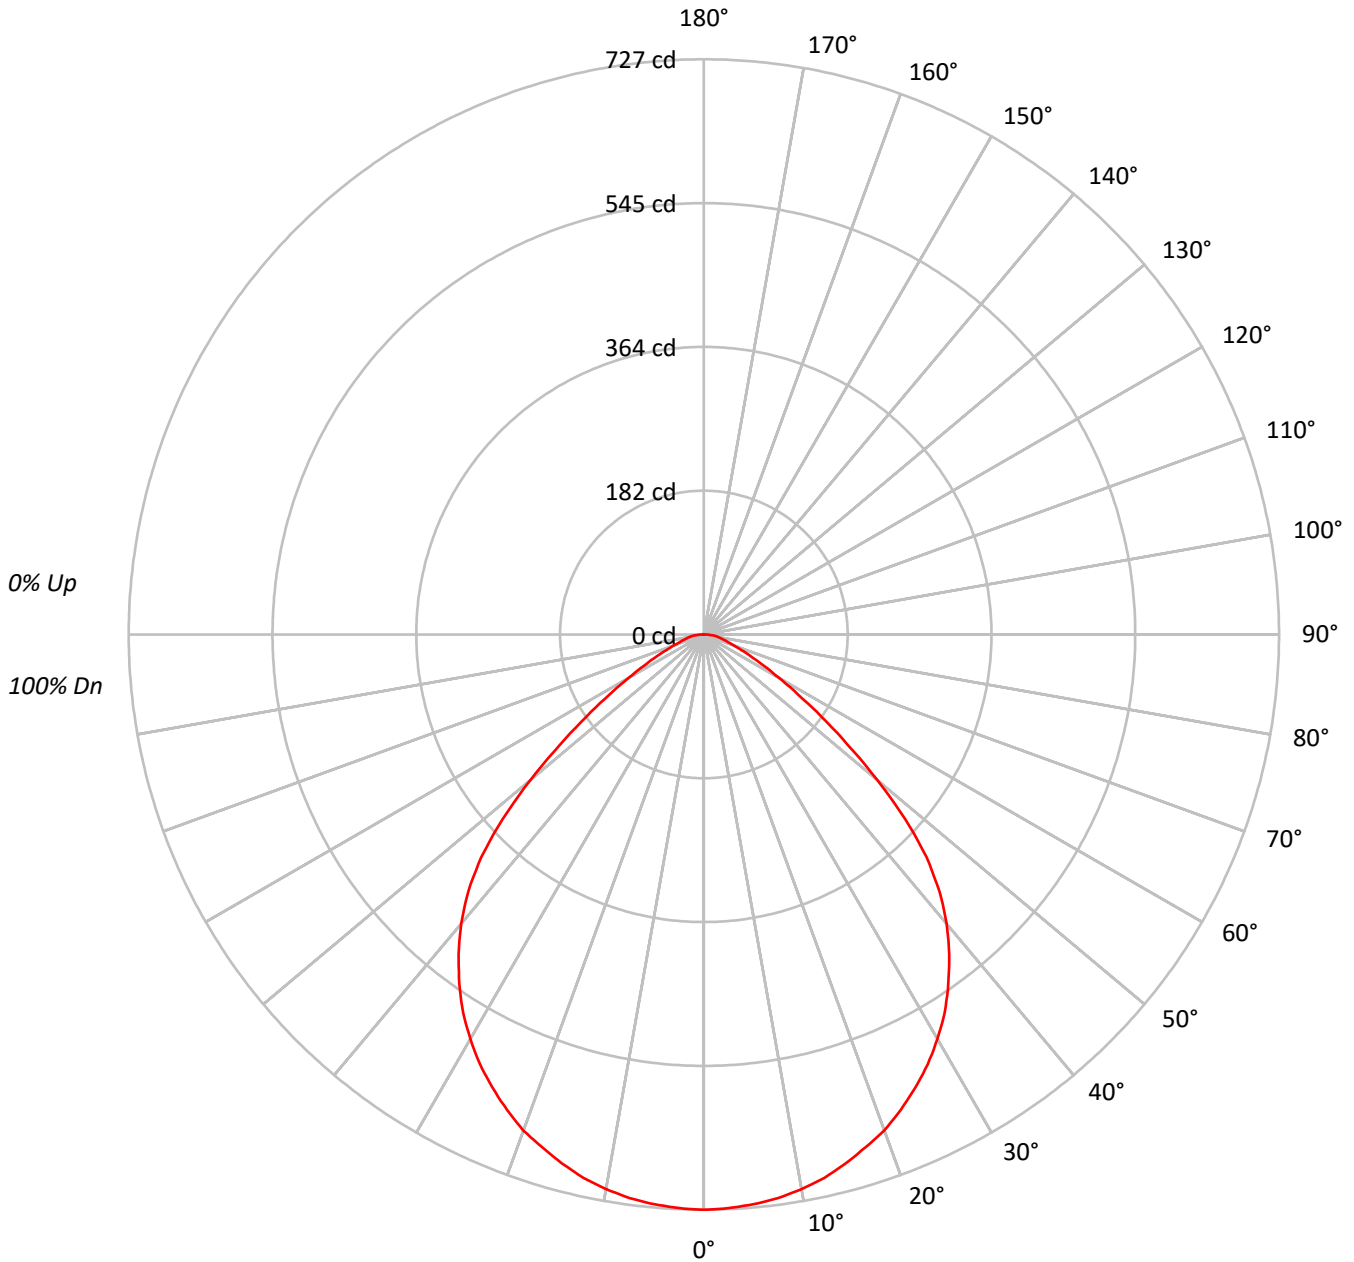



TEST NUMBER: P641758

CATALOG NUMBER: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89																			
2	103	96	91	86	101	94	89	85	91	87	83	88	84	81	85	82	80	78																			
3	95	87	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68																			
4	88	78	71	65	86	77	70	64	75	68	64	72	67	63	70	66	62	60																			
5	82	71	63	57	80	70	62	57	68	61	56	66	60	56	64	59	55	53																			
6	76	65	57	51	75	64	56	51	62	55	50	60	54	50	59	54	50	48																			
7	71	59	51	46	70	58	51	46	57	50	45	55	49	45	54	49	45	43																			
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	40	39																			
9	62	50	43	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35																			
10	59	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	39860
5°	39781
10°	39617
15°	39285
20°	38918
25°	38240
30°	37367
35°	36051
40°	34157
45°	30833
50°	24400
55°	17337
60°	11940
65°	8509
70°	6491
75°	5613
80°	5714
85°	6164

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 30833 cd/sqm



TEST NUMBER: P641758

CATALOG NUMBER: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.7	4.7
10°-20°	195.3	13.3
20°-30°	291.0	19.8
30°-40°	336.0	22.9
40°-50°	301.0	20.5
50°-60°	166.4	11.3
60°-70°	68.3	4.7
70°-80°	29.1	2.0
80°-90°	10.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	554.9	37.8
0°-40°	891.0	60.8
0°-60°	1358.4	92.6
0°-90°	1466.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1466.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	727	
5°	723	69
15°	692	195
25°	632	291
35°	539	336
45°	398	301
55°	181	166
65°	66	68
75°	26	29
85°	10	11
90°	0	



TEST NUMBER: P641758

CATALOG NUMBER: ML5612LSVWFL97FS1E - 691WB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	727.1
2.5°	725.7
5°	722.9
7.5°	718.7
10°	711.7
12.5°	703.4
15°	692.2
17.5°	679.6
20°	667.1
22.5°	650.3
25°	632.2
27.5°	612.7
30°	590.3
32.5°	566.6
35°	538.7
37.5°	509.4
40°	477.3
42.5°	441.0
45°	397.7
47.5°	344.7
50°	286.1
52.5°	228.9
55°	181.4
57.5°	141.0
60°	108.9
62.5°	85.1
65°	65.6
67.5°	51.6
70°	40.5
72.5°	32.1
75°	26.5
77.5°	22.3
80°	18.1
82.5°	15.4
85°	9.8
87.5°	5.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)