

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642026

Luminaire Tested: ML5612LSWFL5597FS1E - 593WB - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642026
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-51)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 593WB - 1200LM - 2700K
Description: ML56 RR, 55D TIR OPTIC, 5" WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1480.5 lumens
Efficiency: N/A
Efficacy: 89.7 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642026

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593WB - 1200LM - 2700K

Luminous Intensity Polar Plot

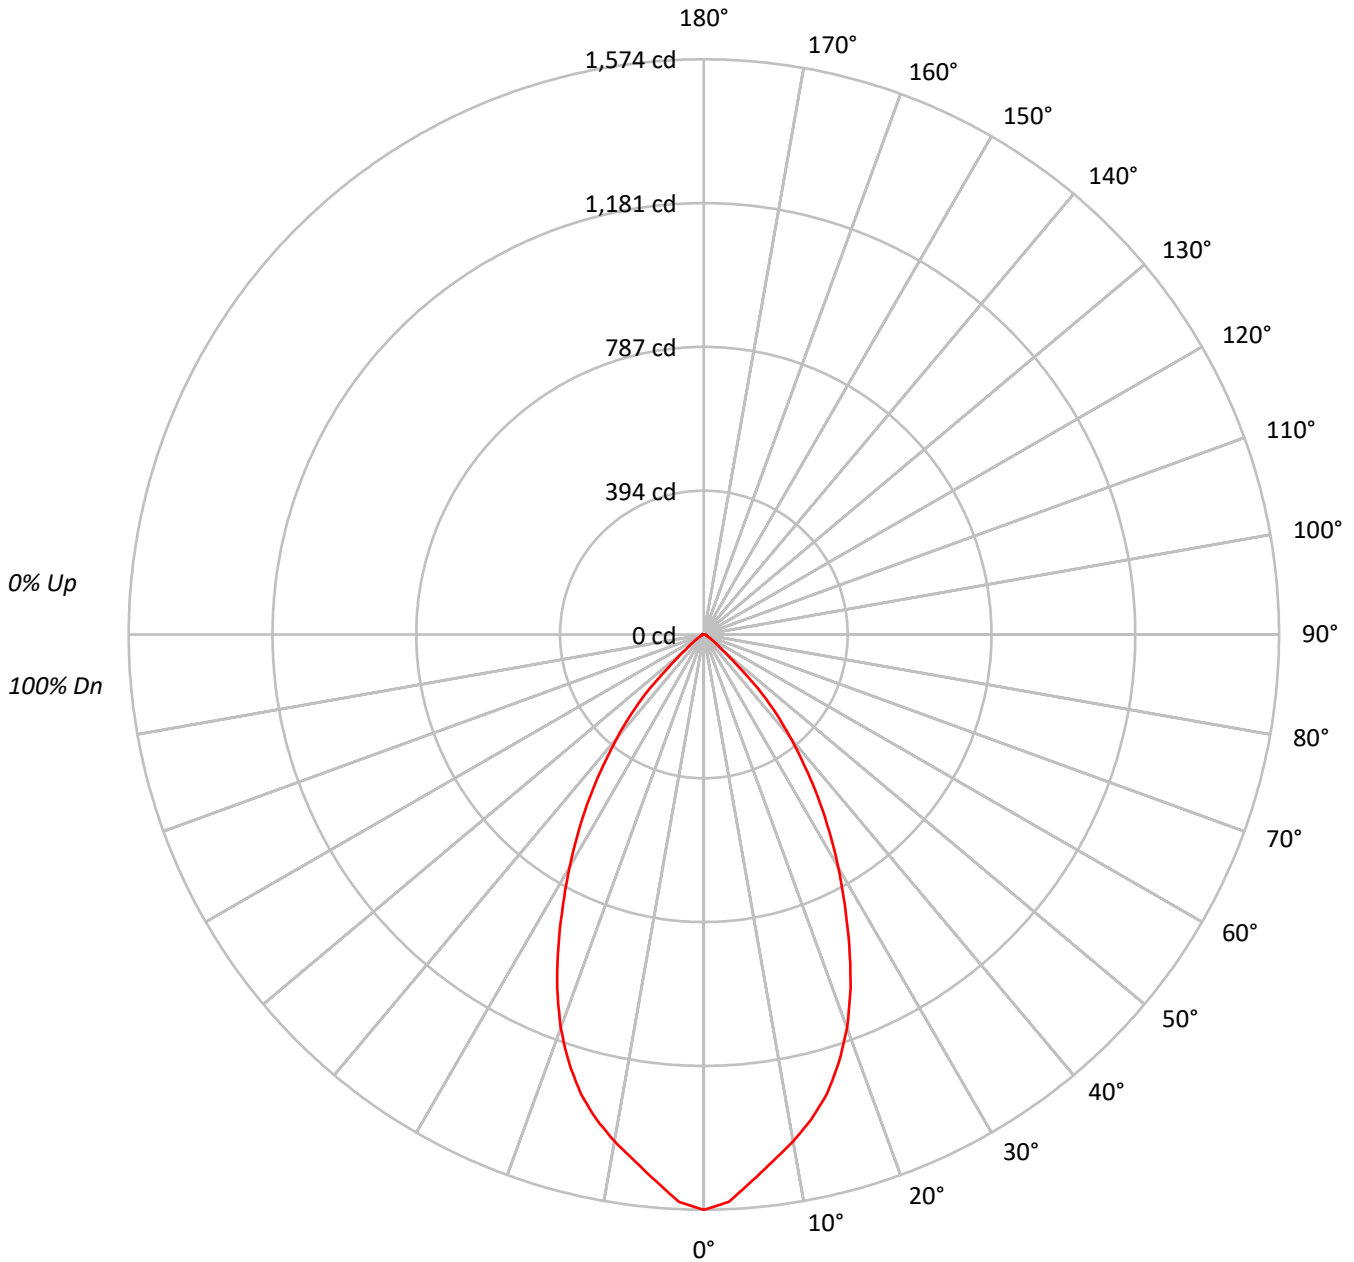



TEST NUMBER: P642026

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593WB - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	86	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	72	72	72	72
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	68	67	67	67	67
6	85	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62	62	62	62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58	58	58	58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54	54	54	54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50	50	50	50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	124277
5°	118998
10°	112855
15°	106317
20°	96197
25°	82024
30°	66934
35°	52434
40°	37974
45°	23589
50°	8437
55°	4542
60°	2289
65°	1718
70°	1823
75°	1617
80°	1818
85°	2355

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23589 cd/sqm



TEST NUMBER: P642026

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593WB - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.5	9.5
10°-20°	362.2	24.5
20°-30°	430.0	29.0
30°-40°	338.7	22.9
40°-50°	159.1	10.7
50°-60°	32.0	2.2
60°-70°	9.6	0.6
70°-80°	6.1	0.4
80°-90°	2.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	932.7	63.0
0°-40°	1271.4	85.9
0°-60°	1462.5	98.8
0°-90°	1480.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1480.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1574	
5°	1502	140
15°	1301	362
25°	942	430
35°	544	339
45°	211	159
55°	33	32
65°	9	10
75°	5	6
85°	3	2
90°	0	



TEST NUMBER: P642026

CATALOG NUMBER: ML5612LSWFL5597FS1E - 593WB - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1574.3
2.5°	1554.5
5°	1501.7
7.5°	1452.8
10°	1407.9
12.5°	1359.0
15°	1300.9
17.5°	1228.3
20°	1145.1
22.5°	1048.7
25°	941.7
27.5°	834.7
30°	734.3
32.5°	637.9
35°	544.1
37.5°	451.7
40°	368.5
42.5°	291.9
45°	211.3
47.5°	117.5
50°	68.7
52.5°	47.5
55°	33.0
57.5°	22.5
60°	14.5
62.5°	10.6
65°	9.2
67.5°	7.9
70°	7.9
72.5°	6.6
75°	5.3
77.5°	5.3
80°	4.0
82.5°	2.6
85°	2.6
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)