

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642196

Luminaire Tested: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642196  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-66)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 2700K  
Description: ML56 RR, 55D TIR OPTIC, 6" TUSCON BRONZE BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 943.1 lumens  
Efficiency: N/A  
Efficacy: 91.6 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642196  
CATALOG NUMBER: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 2700K

### Luminous Intensity Polar Plot

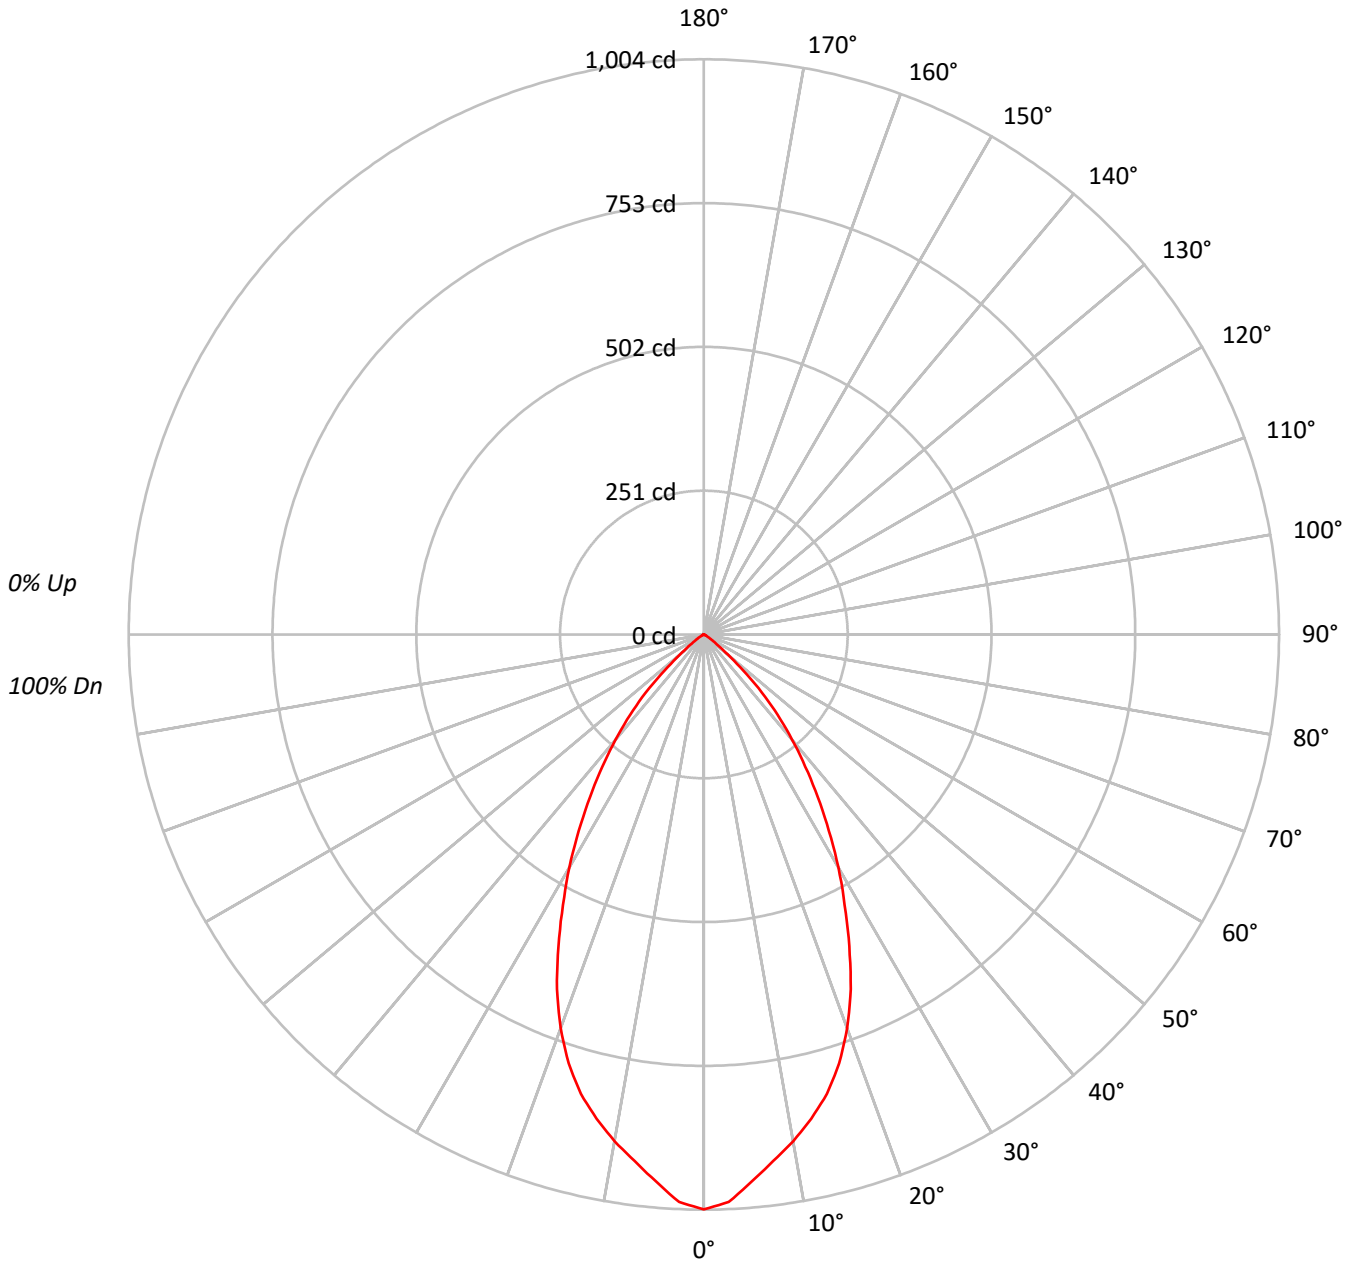



TEST NUMBER: P642196

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93				
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86				
3	101	95	89	85	99	93	88	85	91	87	83	88	85	82	86	83	81	79				
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73				
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67				
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62				
7	81	71	65	61	80	71	65	60	69	64	60	68	63	60	67	63	59	58				
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	55	54				
9	73	63	57	52	72	62	56	52	61	56	52	60	56	52	60	55	52	50				
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47				

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	55012
5°	52740
10°	49988
15°	47106
20°	42669
25°	36317
30°	29713
35°	23162
40°	17161
45°	11141
50°	4640
55°	1711
60°	746
65°	221
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11141 cd/sqm



TEST NUMBER: P642196

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	89.6	9.5
10°-20°	231.2	24.5
20°-30°	274.5	29.1
30°-40°	216.7	23.0
40°-50°	109.1	11.6
50°-60°	19.7	2.1
60°-70°	2.3	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	595.3	63.1
0°-40°	812.0	86.1
0°-60°	940.8	99.8
0°-90°	943.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	943.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1004	
5°	958	90
15°	830	231
25°	600	274
35°	346	217
45°	144	109
55°	18	20
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642196

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1003.5
2.5°	991.6
5°	958.4
7.5°	926.9
10°	898.0
12.5°	865.7
15°	830.0
17.5°	784.9
20°	731.4
22.5°	670.1
25°	600.4
27.5°	532.4
30°	469.4
32.5°	406.5
35°	346.1
37.5°	290.8
40°	239.8
42.5°	190.5
45°	143.7
47.5°	92.7
50°	54.4
52.5°	28.9
55°	17.9
57.5°	11.9
60°	6.8
62.5°	3.4
65°	1.7
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)