

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642197

Luminaire Tested: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642197
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-66)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 3000K
Description: ML56 RR, 55D TIR OPTIC, 6" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 970.0 lumens
Efficiency: N/A
Efficacy: 94.2 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642197
CATALOG NUMBER: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 3000K

Luminous Intensity Polar Plot

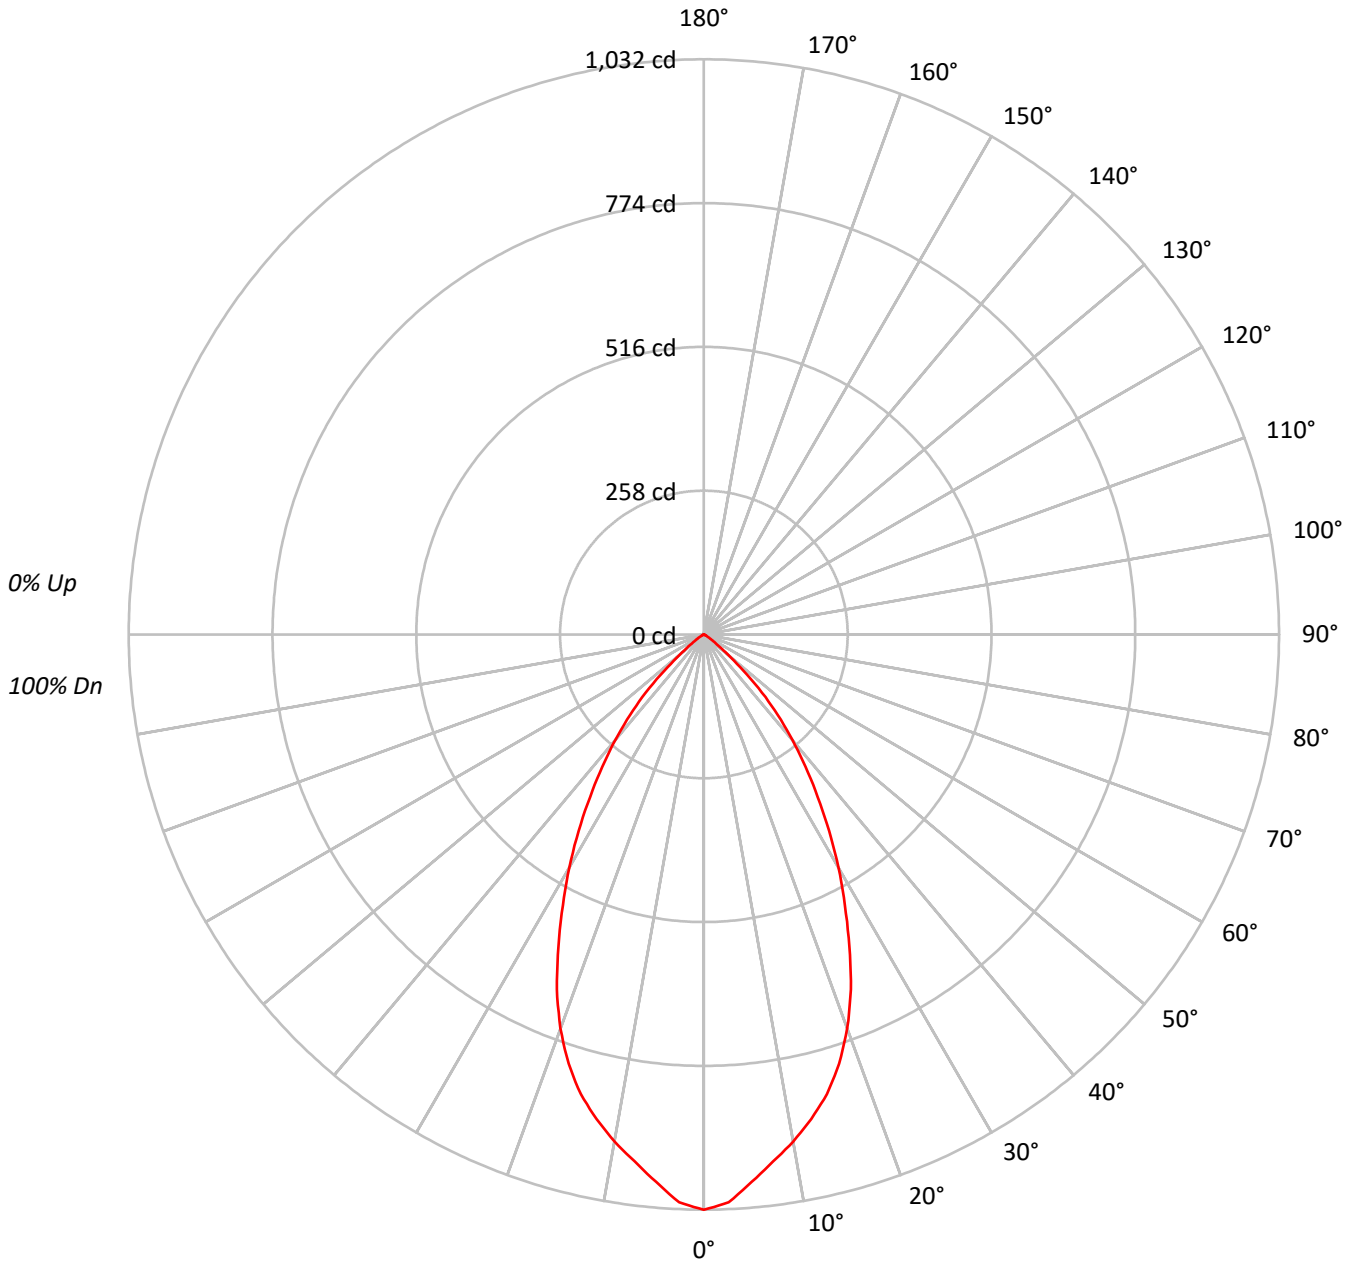



TEST NUMBER: P642197

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93			
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86			
3	101	95	89	85	99	93	88	85	91	87	83	88	85	82	86	83	81	79			
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73			
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67			
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62			
7	81	71	65	61	80	71	65	60	69	64	60	68	63	60	67	63	59	58			
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	55	54			
9	73	63	57	52	72	62	56	52	61	56	52	60	56	52	60	55	52	50			
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	56585
5°	54248
10°	51419
15°	48451
20°	43882
25°	37351
30°	30562
35°	23825
40°	17655
45°	11459
50°	4776
55°	1759
60°	767
65°	221
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11459 cd/sqm



TEST NUMBER: P642197

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.2	9.5
10°-20°	237.8	24.5
20°-30°	282.3	29.1
30°-40°	222.9	23.0
40°-50°	112.2	11.6
50°-60°	20.2	2.1
60°-70°	2.3	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	612.3	63.1
0°-40°	835.2	86.1
0°-60°	967.6	99.8
0°-90°	970.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	970.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1032	
5°	986	92
15°	854	238
25°	618	282
35°	356	223
45°	148	112
55°	18	20
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642197

CATALOG NUMBER: ML5612LSWFL5597FS1E - 693TBZB - 600LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1032.2
2.5°	1019.9
5°	985.8
7.5°	953.4
10°	923.7
12.5°	890.4
15°	853.7
17.5°	807.4
20°	752.2
22.5°	689.3
25°	617.5
27.5°	547.6
30°	482.8
32.5°	418.1
35°	356.0
37.5°	299.1
40°	246.7
42.5°	195.9
45°	147.8
47.5°	95.3
50°	56.0
52.5°	29.7
55°	18.4
57.5°	12.2
60°	7.0
62.5°	3.5
65°	1.7
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)