

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642511

Luminaire Tested: ML5615LSFL409FS1E - 594WB - 1500LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642511  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-32)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSFL409FS1E - 594WB - 1500LM - 2700K  
Description: ML56 RR, 40D TIR OPTIC, 5" WHITE GIMBAL TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1786.6 lumens  
Efficiency: N/A  
Efficacy: 104.5 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 17.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642511  
CATALOG NUMBER: ML5615LSFL409FS1E - 594WB - 1500LM - 2700K

### Luminous Intensity Polar Plot

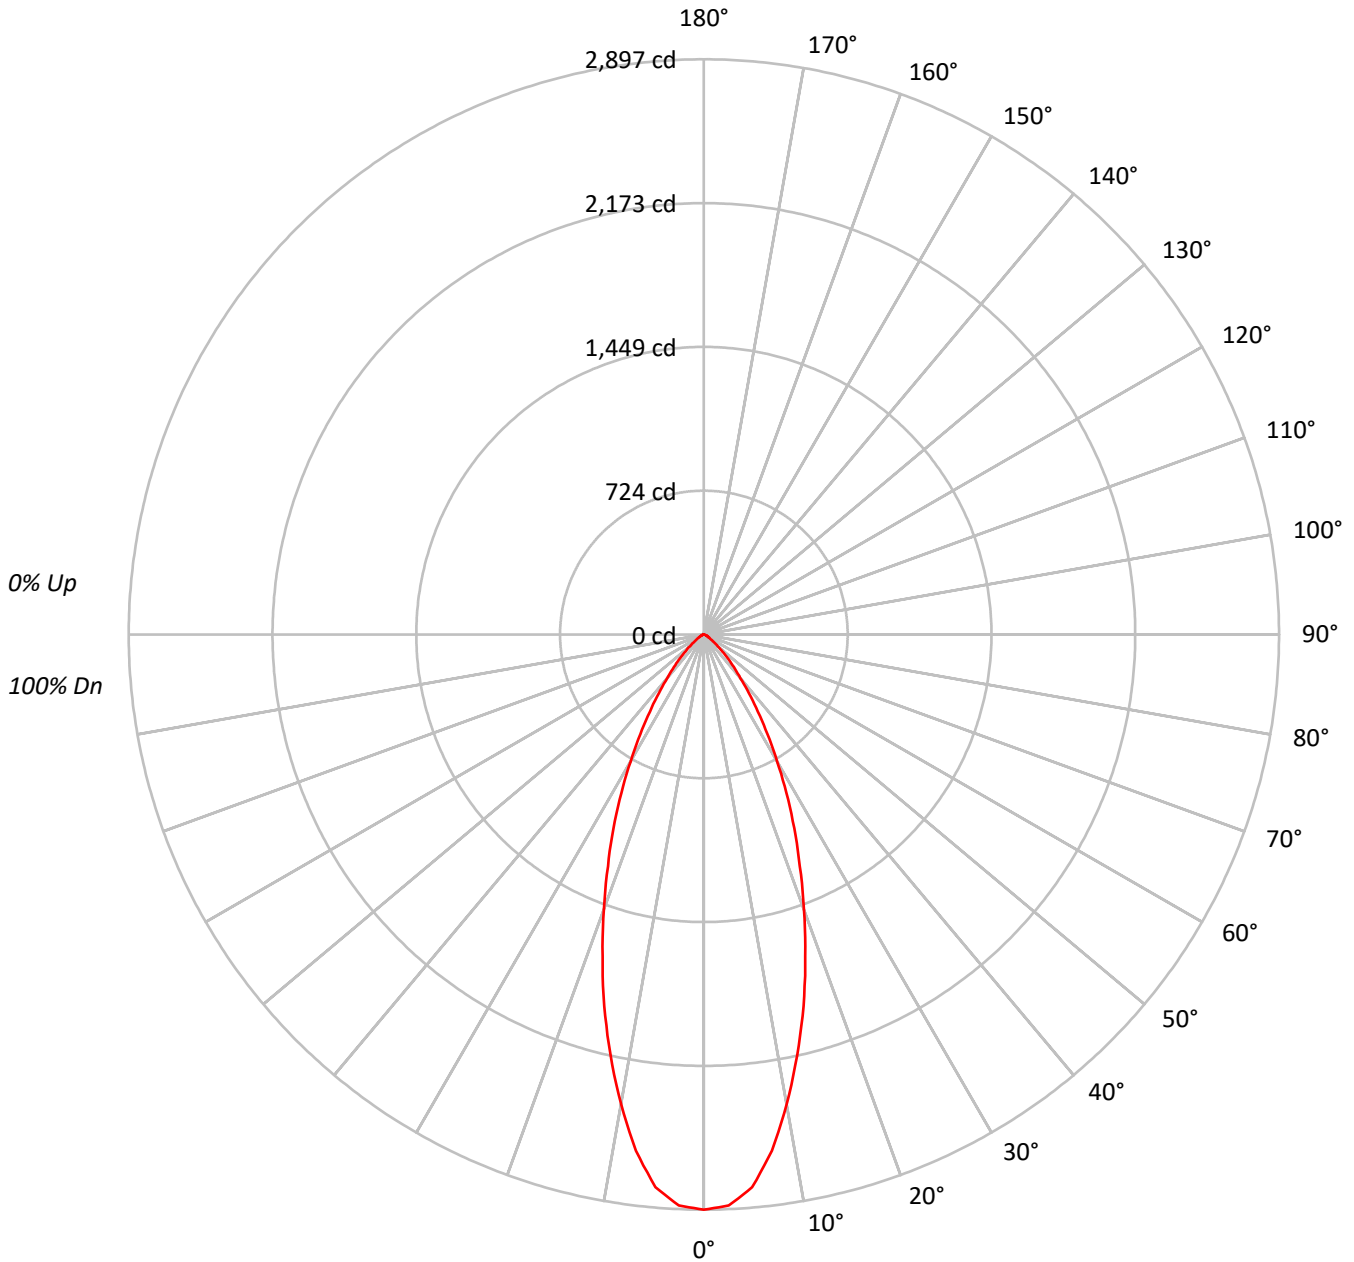



TEST NUMBER: P642511

CATALOG NUMBER: ML5615LSFL409FS1E - 594WB - 1500LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 113 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 | 101 | 99  | 98  | 97  | 96  | 95  | 93  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 108 | 103 | 99  | 96  | 106 | 101 | 98  | 95  | 98  | 95  | 92  | 95  | 93  | 90  | 92  | 90  | 89  | 87  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 103 | 96  | 91  | 87  | 101 | 95  | 90  | 87  | 92  | 88  | 85  | 90  | 86  | 84  | 87  | 85  | 83  | 81  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 97  | 90  | 84  | 80  | 96  | 89  | 84  | 80  | 87  | 82  | 79  | 85  | 81  | 78  | 83  | 80  | 77  | 76  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 93  | 84  | 79  | 74  | 91  | 83  | 78  | 74  | 82  | 77  | 73  | 80  | 76  | 73  | 78  | 75  | 72  | 71  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 88  | 79  | 74  | 69  | 87  | 79  | 73  | 69  | 77  | 72  | 69  | 76  | 71  | 68  | 74  | 71  | 68  | 66  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 84  | 75  | 69  | 65  | 83  | 74  | 69  | 65  | 73  | 68  | 64  | 72  | 67  | 64  | 71  | 67  | 64  | 62  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 80  | 71  | 65  | 61  | 79  | 70  | 65  | 61  | 69  | 64  | 61  | 68  | 64  | 60  | 67  | 63  | 60  | 59  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 77  | 67  | 61  | 58  | 76  | 67  | 61  | 57  | 66  | 61  | 57  | 65  | 60  | 57  | 64  | 60  | 57  | 56  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 73  | 64  | 58  | 54  | 72  | 63  | 58  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 61  | 57  | 54  | 53  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 228708 |
| 5°  | 221443 |
| 10° | 192589 |
| 15° | 158360 |
| 20° | 123717 |
| 25° | 93730  |
| 30° | 67189  |
| 35° | 45708  |
| 40° | 29483  |
| 45° | 18923  |
| 50° | 11077  |
| 55° | 6207   |
| 60° | 4168   |
| 65° | 2914   |
| 70° | 2516   |
| 75° | 1891   |
| 80° | 1409   |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 18923 cd/sqm



TEST NUMBER: P642511

CATALOG NUMBER: ML5615LSFL409FS1E - 594WB - 1500LM - 2700K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 253.7  | 14.2      |
| 10°-20°   | 535.3  | 30.0      |
| 20°-30°   | 492.6  | 27.6      |
| 30°-40°   | 301.2  | 16.9      |
| 40°-50°   | 134.6  | 7.5       |
| 50°-60°   | 44.6   | 2.5       |
| 60°-70°   | 16.9   | 0.9       |
| 70°-80°   | 6.8    | 0.4       |
| 80°-90°   | 0.9    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1281.6 | 71.7      |
| 0°-40°    | 1582.8 | 88.6      |
| 0°-60°    | 1762.1 | 98.6      |
| 0°-90°    | 1786.6 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1786.6 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2897 |      |
| 5°  | 2794 | 254  |
| 15° | 1938 | 535  |
| 25° | 1076 | 493  |
| 35° | 474  | 301  |
| 45° | 170  | 135  |
| 55° | 45   | 45   |
| 65° | 16   | 17   |
| 75° | 6    | 7    |
| 85° | 0    | 1    |
| 90° | 0    |      |



TEST NUMBER: P642511

CATALOG NUMBER: ML5615LSFL409FS1E - 594WB - 1500LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 2897.2 |
| 2.5°  | 2878.5 |
| 5°    | 2794.5 |
| 7.5°  | 2621.9 |
| 10°   | 2402.6 |
| 12.5° | 2170.9 |
| 15°   | 1937.7 |
| 17.5° | 1698.2 |
| 20°   | 1472.7 |
| 22.5° | 1262.7 |
| 25°   | 1076.1 |
| 27.5° | 898.8  |
| 30°   | 737.1  |
| 32.5° | 595.6  |
| 35°   | 474.3  |
| 37.5° | 371.7  |
| 40°   | 286.1  |
| 42.5° | 222.4  |
| 45°   | 169.5  |
| 47.5° | 126.0  |
| 50°   | 90.2   |
| 52.5° | 63.8   |
| 55°   | 45.1   |
| 57.5° | 34.2   |
| 60°   | 26.4   |
| 62.5° | 21.8   |
| 65°   | 15.6   |
| 67.5° | 12.4   |
| 70°   | 10.9   |
| 72.5° | 7.8    |
| 75°   | 6.2    |
| 77.5° | 4.7    |
| 80°   | 3.1    |
| 82.5° | 1.6    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)